

Fujitsu General (Thailand) Co., Ltd.



ISO 9001 Certification number: 01 100 075229

Fujitsu General (Shanghai) Co., Ltd.



ISO 9001 Certification number:  
01 100 79269

Fujitsu General Central Air-conditioner (Wuxi) Co., Ltd.



ISO 9001 Certification number:  
15917Q20073R5M

- Specifications and design are subject to change without notice for future improvement.
- For further details, please check with our authorised dealer.
- The products or equipments in this catalogue contain fluorinated greenhouse gases.
- “**GENERAL**” and “**AIRSTAGE**” are worldwide trademarks of FUJITSU GENERAL LIMITED and are registered trademarks in Japan and other countries or areas.
- “**PGair**” is a worldwide trademark of FUJITSU GENERAL LIMITED.
- iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries.
- “BACnet” is a trademark or registered trademark of the American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc.
- “MODBUS” is a registered trademark of Schneider Electric.
- “LONWORKS” and Echelon are trademarks of Echelon Corporation registered in the United states and other countries.
- Other company and product names mentioned herein may be registered trademarks, trademarks or trade names of their respective owners.
- Actual products’ colors may be different from the colors shown in this printed material.

Distributed by :



Abu Dhabi: 02 6727684, Dubai: 04 2820477, Ajman: 06 7497111,  
Al Ain: 03 7641292, Fujairah: 09 2239898, Ras Al Khaimah: 07 2334581,  
Zayed City: 02 8840902  
Email: info@taqeef.com, [www.taqeef.com](http://www.taqeef.com)

# FUJITSU GENERAL LIMITED

3-3-17, Suenaga, Takatsu-ku, Kawasaki, Kanagawa, 213-8502, Japan  
[www.fujitsu-general.com](http://www.fujitsu-general.com)



Copyright© 2008-2025 Fujitsu General Limited. All rights reserved. 6MGU10-2503E



# VRF CATALOGUE 2025 for UAE

VRF CATALOGUE 2025 for UAE

FUJITSU GENERAL LIMITED



FUJITSU GENERAL LIMITED



## FUJITSU GENERAL Way

### Our Mission

# Living together for our future

Through innovation and technology, we deliver a brighter future with the peace of mind to our customers and societies around the world.

### Our Philosophy

#### Act Spontaneously

We embrace new challenges by investing in ourselves for personal growth, and through continuous creativity with a spontaneous attitude.

#### Develop Our Team

We respect and value our people, and optimize their abilities through fostering culture and diversity, and utilizing a collaborative effort focused on communication.

#### Value Integrity

To achieve our goals, we always act with integrity and shared ethics.

## CONTENTS

### OUR MESSAGE

OUR HISTORY .....	004
WORLD WIDE LOCATIONS .....	006
GLOBAL BUSINESS ACTIVITIES .....	008
PROJECT REFERENCE .....	010
GLOBAL DEVELOPMENT & PRODUCTION BASES .....	012
HIGH QUALITY DEVELOPMENT & PRODUCTION FACILITIES .....	014

### VRF Solutions

OUR SOLUTION FOR ALL PROPERTIES .....	016
Light Commercial Solutions .....	018
Commercial Solutions .....	026

### VRF CORE TECHNOLOGY

HIGH ENERGY EFFICIENCY .....	V-004
HIGH RELIABILITY .....	V-006
DESIGN FLEXIBILITY .....	V-008
MORE COMFORT .....	V-010
EASY INSTALLATION .....	V-012
EASY SERVICE & MAINTENANCE .....	V-014

### VRF OUTDOOR UNITS

VRF LINE-UP .....	V-018
-------------------	-------

### For **SMALL BUILDING** V-020

#### VRF **J-III Tropical Series**

Heat Pump type for heating or cooling operation

- 4 HP - 6 HP 6 Models
- Single phase: 4 HP to 6 HP/3 models
- 3 phase: 4 HP to 6 HP/3 models

### For **LARGE BUILDING** V-024

#### VRF **VC-V**

Heat Pump Modular type for heating or cooling operation

- 8 HP - 80 HP 37 Models
- Space saving combination: 8 HP to 80 HP/37 models
- Energy efficiency combination: 16 HP to 44 HP/ 14 models

#### VRF **V-III Tropical Series**

Production by order

Heat Pump Modular type for heating or cooling operation

- 8 HP - 54 HP 39 Models
- Space saving combination: 8 HP to 54 HP/24 models
- Energy efficiency combination: 16 HP to 46 HP/15 models

### VRF INDOOR UNITS

INDOOR UNITS LINE-UP .....	V-044
Compact Cassette .....	V-046
4-way Flow Cassette .....	V-048
Circular Flow Cassette .....	V-052
Mini Duct .....	V-054
Slim Duct / Slim Concealed Floor .....	V-056
Medium Static Pressure Duct .....	V-058
High Static Pressure Duct .....	V-060
Floor / Ceiling .....	V-064
Ceiling .....	V-066
Wall Mounted (EEV Internal / external) .....	V-068

### VENTILATION

Outdoor-air Processing Unit .....	Vn-004
DX Kit for Air Handling Unit or Fresh Air Handling Unit application ..	Vn-006

### VRF CONTROL SYSTEMS

CONTROL SYSTEM OVERVIEW .....	C-004
BEST CONTROL SOLUTION FOR EACH PROPERTY .....	C-006
COMPARISON TABLE OF CONTROLLERS .....	C-008
• Individual Controller .....	C-010
• Centralized Controller .....	C-022
• Converter / Adaptor .....	C-028

### VRF OPTION

Pressure Sensor Kit .....	C-038
Auto Louver Grille Kit .....	C-039
CONTROL SYSTEM LIST .....	C-040
OPTIONAL PARTS LIST .....	C-044
OPTIONAL PARTS .....	C-048
FUNCTION LIST .....	C-052
SEPARATION TUBE etc. ....	C-056

### SUPPORT

VRF SUPPRT .....	Sp-004
HVAC SYSTEM DESIGN SUPPORT TOOL .....	Sp-006
QUICK SERVICE & MAINTENANCE .....	Sp-008
AIRSTAGE Service Monitor Tool .....	Sp-010
SERVICE TOOL .....	Sp-012
WEB MONITORING TOOL .....	Sp-013

VRF j-III Tropical

VRF V-III Tropical

NEW VRF VC-V



# OUR HISTORY


Overseas Air Conditioning Business since 1971  
VRF Business since 2001

FUJITSU GENERAL's VRF Series has been developed based on our long-term air-conditioning technology knowledge. We have offered a series of products from large homes to large-scale buildings to meet the various market needs.

## For Commercial Use

2007


8 to 42HP / Heat pump



VRF **V**

2009


High efficiency and Compact design model  
Extensive lineup from 8HP to 48HP  
in 2HP increment / Heat pump



VRF **V-II**

2012


High efficiency and Compact design model  
8 to 48HP / Heat Recovery




VRF **VR-II**

2013


Tropical spec model  
Extensive lineup from 8HP to 42HP in  
2HP increment / Heat pump



VRF **V-II** 

2015


High efficiency and large capacity model.  
Extensive lineup from 8HP to 54HP in  
2HP increment / Heat pump




VRF **V-III**

2016


Tropical spec model  
Extensive lineup from 8HP to 54HP in  
2HP increment / Heat pump



VRF **V-III** 

2025

High efficiency and large capacity model.  
Extensive lineup from 8HP to 80HP in  
2HP increment / Cooling only




NEW

VRF **VC-V**

## For Residential & Light Commercial Use

2004

Small VRF Series is released. 6HP / Heat  
pump



VRF **J**

2011

High efficiency and small capacity model  
4HP to 6HP / Heat pump



VRF **J-II**

2014

High efficiency and compact design model  
4HP to 6HP / Heat pump



VRF **J-IIS**

2016

High efficiency and small capacity model  
4HP to 6HP / Heat pump



VRF **J-III**

2017

Tropical spec model  
High efficiency and compact design model  
4HP to 6HP / Heat pump



VRF **J-III** 

2017

High efficiency and compact design model  
10HP to 12HP / Heat pump



VRF **J-III L**

### AIRSTAGE™ History

1936 Established as Yaou Shouten Ltd. - 2025

1936  
Established as Yaou Shouten Ltd.

1971  
Air conditioner exports to Middle East.

**New Product Initiatives**  
Fujitsu introduced inverter technology  
which used R410A refrigerant.



**RoHS Compliant**  
Restriction of Hazardous Substances (ROHS) is  
an EU directive on the restriction of the use of certain  
hazardous substances in all consumer electrical and  
electronic equipment.



**DC Inverter Compressors**  
Use of 100% inverter driven  
DC compressors.





# WORLDWIDE LOCATIONS


Under a system of five bases in Europe, the Middle East, Asia and Oceania, North and South America, and Japan, the company promotes Globalization from a worldwide perspective while emphasizing the actual conditions in each region.



JAPAN Head Office



Technology research building (Japan)

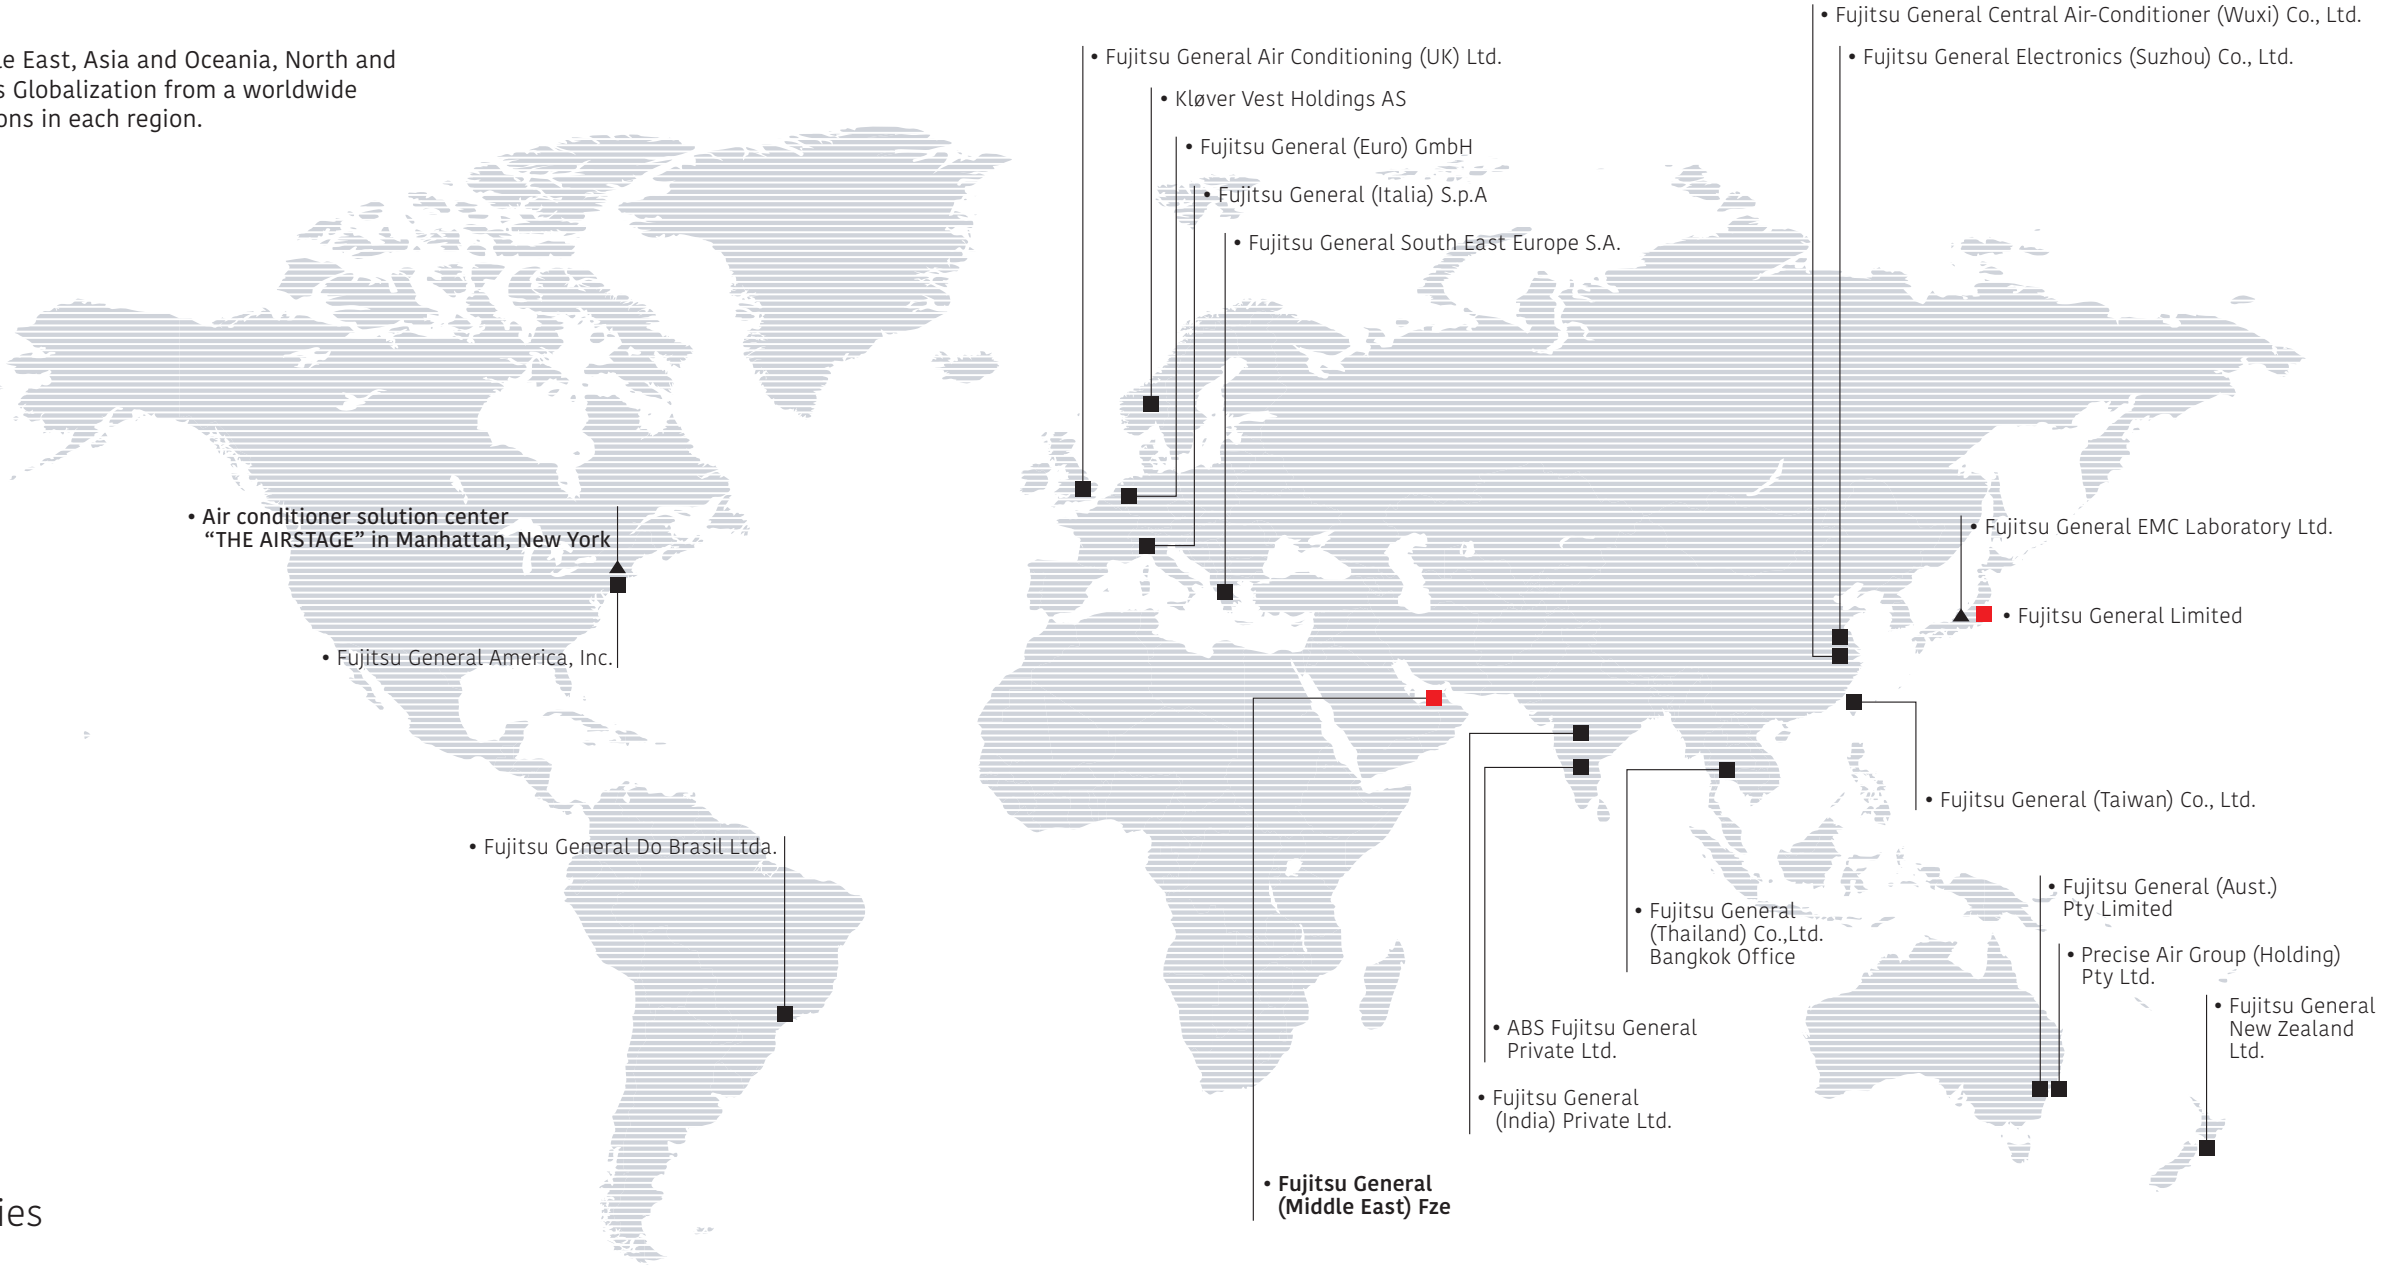

17 Overseas Sales Companies



Fujitsu General (Taiwan) Co., Ltd. (Taiwan)



Fujitsu General (Thailand) Co.,Ltd. Bangkok Office (Thailand)



Fujitsu General Electronics (Suzhou) Co., Ltd.



Fujitsu General South East Europe S.A. (Greece)



Fujitsu General (Aust.) Pty Ltd. (Australia)



Precise Air Group (Holding) Pty Ltd. (Australia)



Fujitsu General New Zealand Ltd. (New Zealand)



Fujitsu General (Middle East) Fze (U.A.E.)



Fujitsu General (Euro) GmbH (Germany)



Fujitsu General Air Conditioning (UK) Ltd. (U.K.)




Fujitsu General (Italia) S.p.A (Italy)



Fujitsu General (India) Private Ltd. (India)



ABS Fujitsu General Private Ltd. (India)



Fujitsu General Do Brasil Ltda.(Brasil)



Fujitsu General America, Inc. (U.S.A.)



Kløver Vest Holdings AS (Norway)




FUJITSU GENERAL SOLUTION CENTER “THE AIRSTAGE” (U.S.A.)



# GLOBAL BUSINESS ACTIVITIES

We have been recognized for our activities in advertising, human resource development and customer service, as well as for our community-based social contribution activities in each region, winning numerous awards and achieving a high level of customer satisfaction.

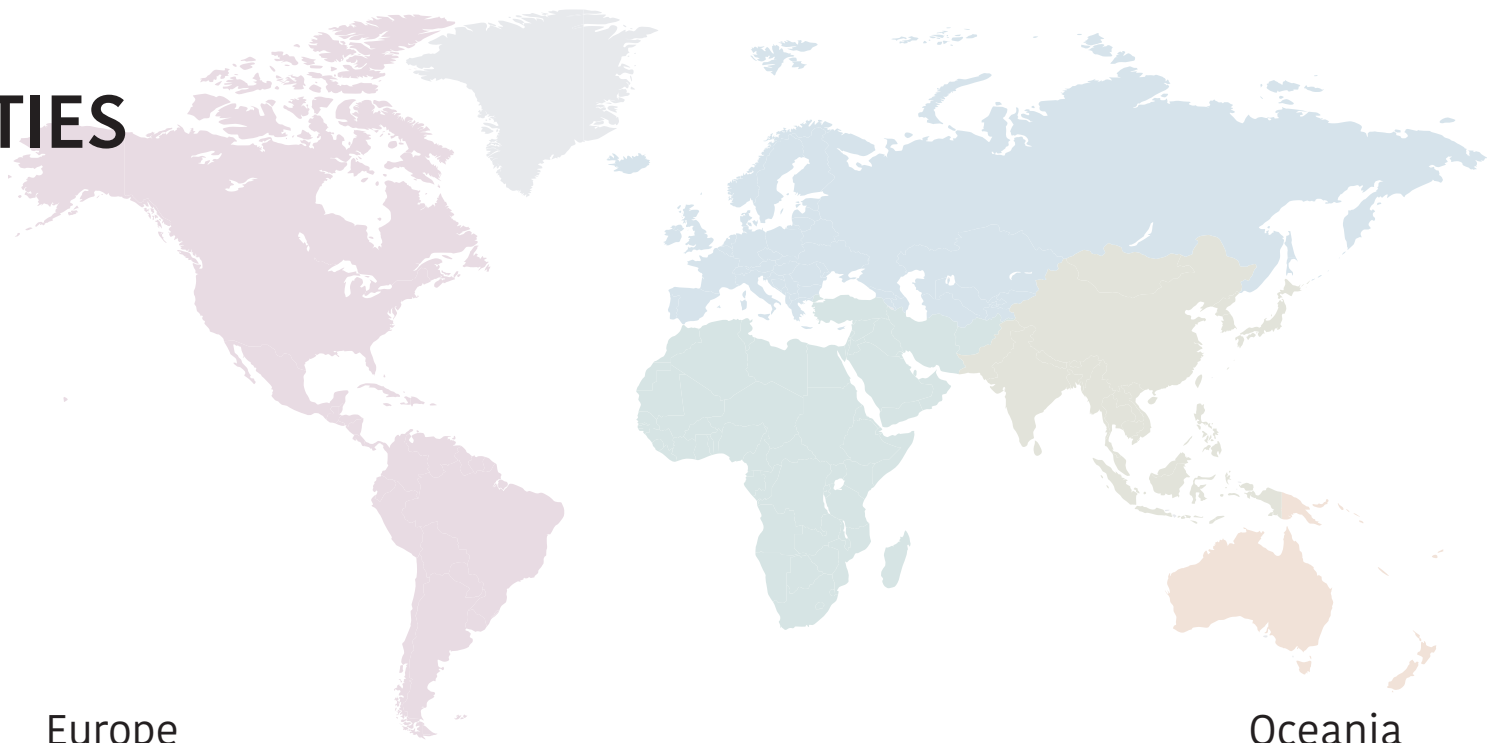

## North and South Americas



AHR Expo



HVAC trade shows in Brazil



Distributor conference in USA



Distributor conference in USA


## Middle East




Exhibition



Training in Kuwait

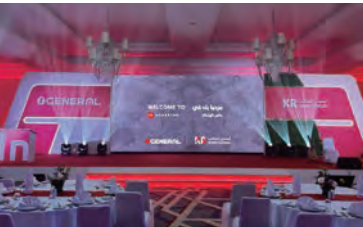

Launch event in Oman

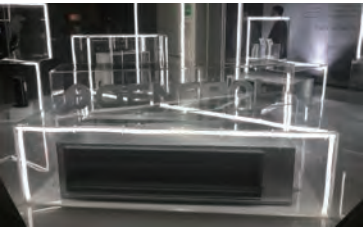

New product seminar in UAE

## Europe



HVAC trade show in Germany



Training in Germany



HVAC trade show in Germany



Training seminar in Italy



Event in the United Kingdom

## Oceania



HVAC trade show in Australia



Launch event in New Zealand



Launch event in New Zealand

## Asia



New product presentation meeting



Exhibition in India



V-CV Launch Event



New product presentation seminar in Singapore



Dealer Convention in Hong Kong

## International authoritative design awards



The NEWS Dealer Design Awards



Gold Award (Category: HVAC & PLUMBING) in Reader's Choice Awards



TOP OF MIND 2016 First prize in "MARCA DE EQUIPAMENTO DE AR-CONDICIONADO" category of "CLIMATIZACAO" division



Superbrands is the world's largest independent arbiter of branding.



The iF Product Design Award is given annually by iF International Forum Design GmbH for industrial products from around the world.



The Plus X Award is the world's largest innovation award for technology, sports and lifestyle.



reddot winner 2024

A product design competition that has been held since 1955. Products that win the award are given the "Red Dot" seal, a sign of international recognition of quality.



One of the famous design award in the world. Designs are judged on innovation and aesthetics, as well as their benefit to users, clients/brands, and society.



ProductReview.com.au's annual awards are selected from products and services that have been well-rated by the ProductReview community.



Voted by Australians as the "Most Trusted Brand" - Air Conditioning Category 5 Years Running



China State Construction Engineering Luban Prize




The Good Design Award is an award sponsored by the Japan Institute of Design Promotion, and is given once a year to items of outstanding design.



# PROJECT REFERENCES



Introduced in  
over 50 countries worldwide

Highly popular for their excellent quality, energy efficiency, and ease of installation, Fujitsu General's products are installed in a wide range of buildings around the world, including high-rise office buildings, stores, hotels, public facilities, schools, hospitals, and residences.



For Light commercial use

- 1 Shop in Europe
- 2 Factory in Europe
- 3 School in Asia
- 4 Hospital in Asia
- 5 Office in Asia
- 6 Shop in Oceania
- 7 Office in Oceania
- 8 School in the Middle East
- 9 Public facility in the United States



For Commercial use

- 10 Public Square in Asia
- 11 Hotel in Asia
- 12 Hotel in Asia
- 13 Public facility in Asia
- 14 Apartment in Oceania
- 15 Apartment in Oceania
- 16 Hotel in the Middle East
- 17 Hotel in the Middle East



For Residential use

- 18 Villa in the Africa
- 19 Residence in Oceania
- 20 Residence in the United States
- 21 Villa in the Middle East



# GLOBAL DEVELOPMENT & PRODUCTION BASES

We have established R&D bases in five countries from Japan, Europe, Asia, China, and North America to pursue environmental properties and comfort according to the needs of each region.

- • Head office
- • R&D center
- • Manufacturing companies

## R&D center & Technology Research Building



R&D center in Fujitsu General (Euro) GmbH (Germany)



North America R&D Center (USA)



Fujitsu General Air Conditioning R&D (Thailand) Co., Ltd. (Thailand)




R&D center in Fujitsu General (Shanghai)



JAPAN Head office, R&D center and 60 m height difference testing tower (Japan)

Technology research building in Japan Head office

**Constructing IoT-based manufacturing**  
We are implementing a real-time IoT-enabled system to immediately visualize and analyze various information such as facility operating status, assembly line production progress, and parts inventory and transportation status. This will further enhance the accuracy of production and shipping forecasts in the Head Office and factory management departments. The system will also help improve activities by employees at production sites, with the aim of improving the efficiency of the production process, the efficiency of parts distribution operations, and the utilization rates of the facilities.

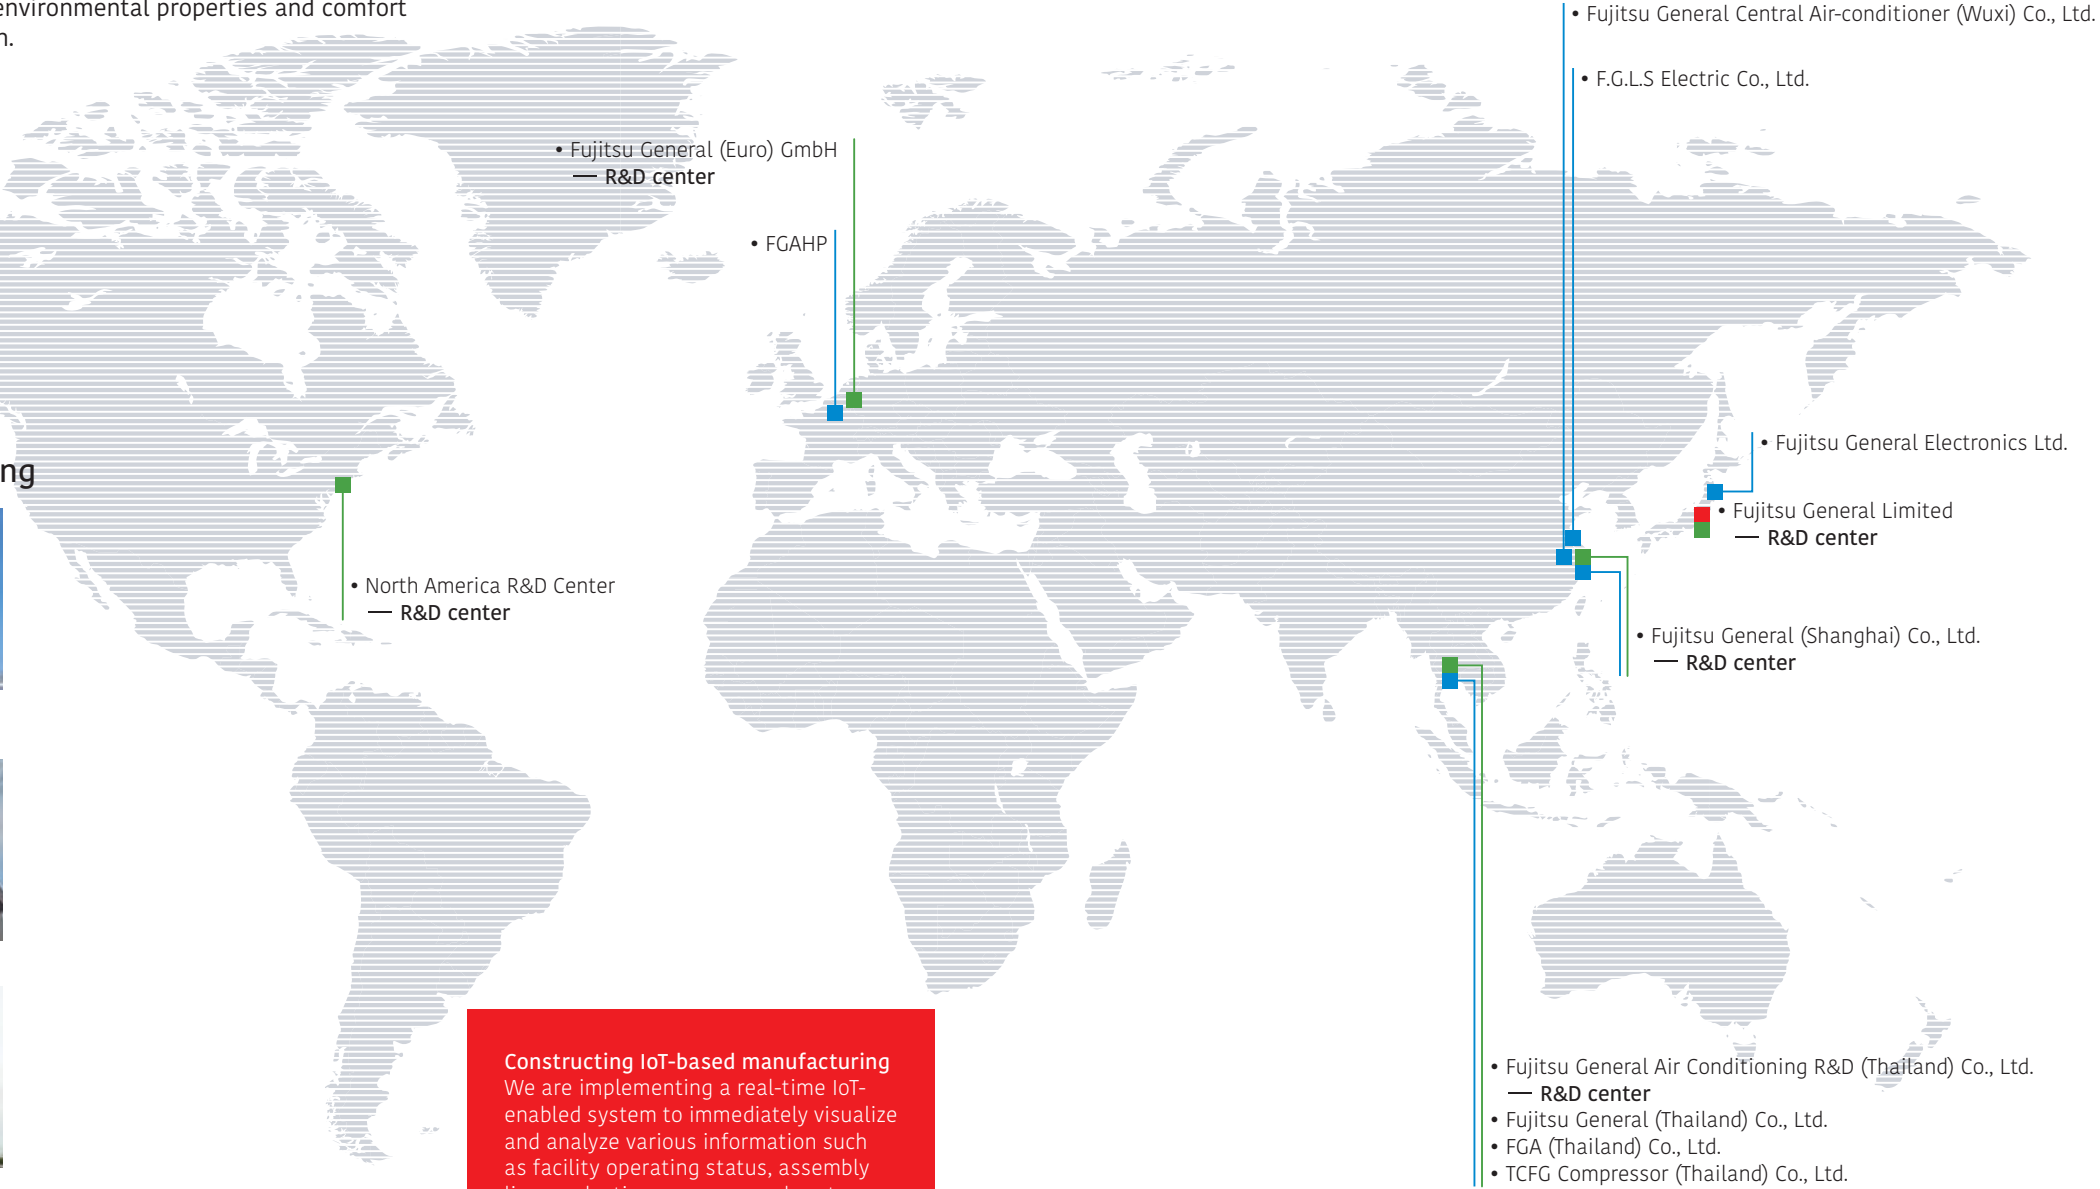

## Overseas manufacturing companies



Fujitsu General (Shanghai) Co., Ltd. (China)



F.G.L.S Electric Co., Ltd. (China)



Fujitsu General Central Air-conditioner (Wuxi) Co., Ltd. (China)



Fujitsu General Electronics Ltd. (Japan)



FGAHP



Fujitsu General (Thailand) Co., Ltd. (Thailand)



FGA (Thailand) Co., Ltd. (Thailand)



Fujitsu General Air Conditioning R&D (Thailand) Co., Ltd. (Thailand)



TCFG Compressor (Thailand) Co., Ltd. (Thailand)



# HIGH QUALITY DEVELOPMENT & PRODUCTION FACILITIES

## Advanced Research Facility and Equipment

### Performance Testing



**Air Volume Measurement Room**  
Measure air volumes of the air conditioners from compact room air conditioner models to VRF.




**Calorimeter**  
Measure the cooling/heating capacity by measuring the inlet and outlet temperatures, humidity, and air volume of the air conditioner.



**Silent Room**  
Measure the operating sounds of air conditioners with the sound reflection-proof walls and ceiling.

Fujitsu General is one of Japan's leading manufacturers with an R&D Center in Japan. We provide customers with the highest quality and performance using these facilities.

### Reliability Testing



**Constant Temperature Room**  
Check on the product performance in cooling/heating operation under the various temperature and humidity conditions.



**Practical Test Room**  
Check on whether the air conditioners performance under the actual house conditions is sustainable.



**Shower Test Room**  
Check on whether the electrical box of the outdoor unit is protected by rain waters with Typhoon like wind.

### Transportation & Handling




Compressibility testing



Vibration testing

## Testing Laboratory

Fujitsu General EMC Laboratory Limited



### 60 m Height Difference Testing Tower

Objective is to confirm oil circulation of compressor for reliability



## Acquisition of ISO 9001

The overseas manufacturing subsidiaries of our group have obtained ISO 9001 certification.

## High Product Quality Assurance


All Fujitsu General factories have acquired ISO 9001, and have built a quality control system common around the world. High quality products are offered to all over the world based on stringent quality inspections.

### Receiving inspection

Parts procurement requires a supplier's test report. European regulation RoHS inspection is also performed by special test department in-house. Total number inspection is performed especially on main parts to remove defectives.

### Stringent product quality inspection

Stringent quality inspection is carried out at all production processes. High quality is maintained by stringent checks by inspectors and repetitive inspection.

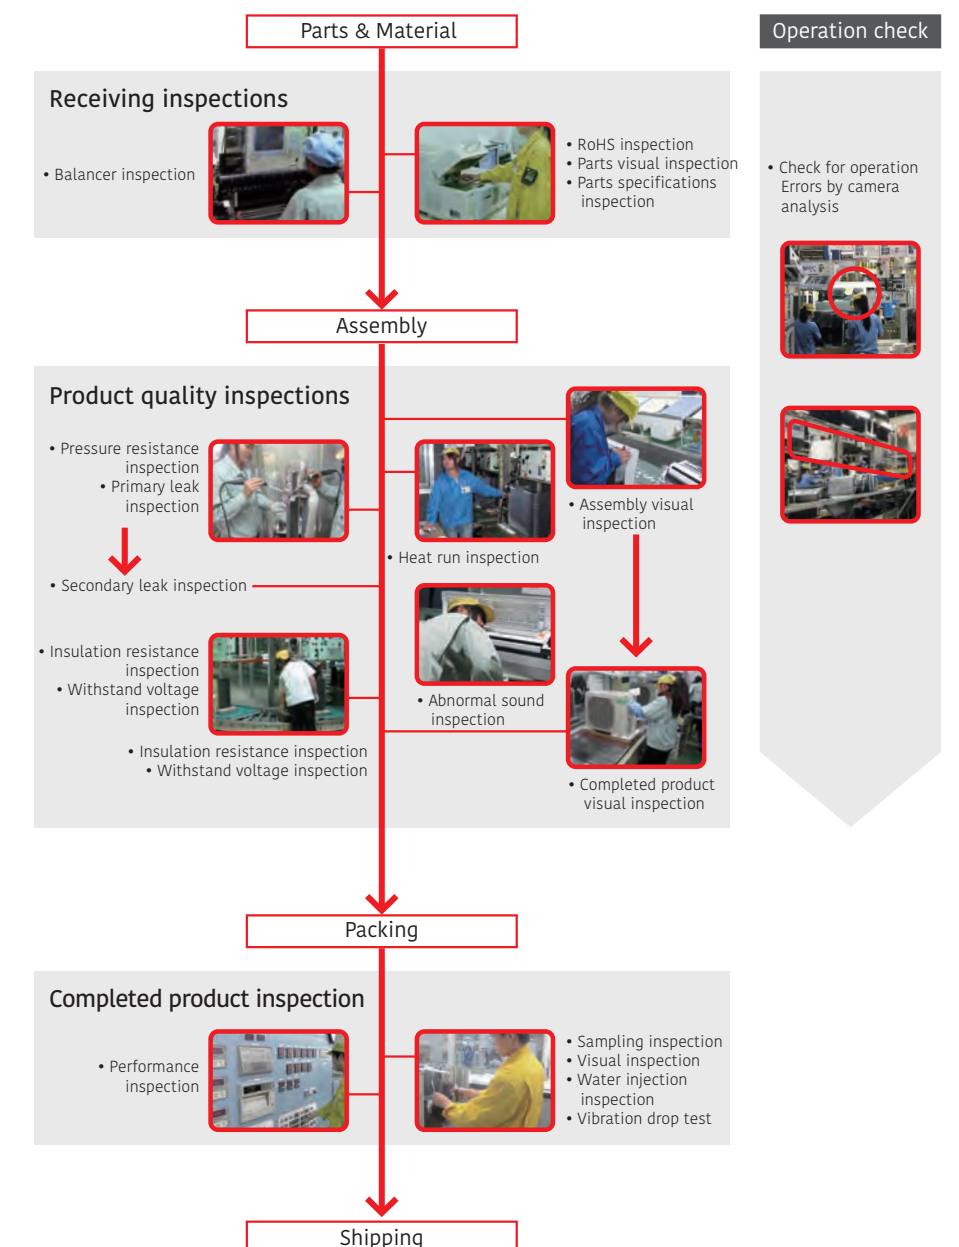



# OUR SOLUTION FOR

Fujitsu General provides the best solutions suitable for properties.

## Solution Point

We provide Fujitsu General total solutions for the property unique needs.



# ALL PROPERTIES

## Target Property



### LIGHT COMMERCIAL

For Small offices, Hotels, School, Shops and Restaurant etc.


We offer comfortable and economical air conditioning systems focused on small to medium-sized buildings.



### COMMERCIAL

For Large Building

We provide single and modular type VRF systems designed for high efficiency, comfort, freedom of design, easy installation and high reliability.

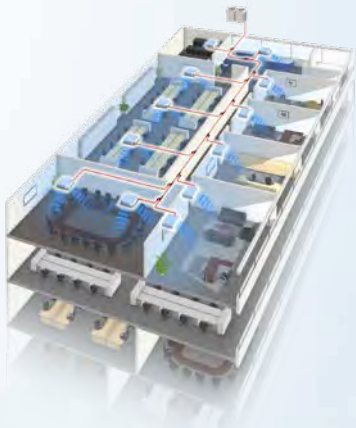



Light Commercial

# APARTMENT, VILLA

Fujitsu General offers the small VRF system to match from large living rooms to bedrooms for apartment and villa.

## APARTMENT



## VILLA




Large space air conditioning in the dining and living room



Medium Static Pressure Duct

Small space air conditioning  
Space saving  
Mini duct type with 198 mm height and 450mm depth. This can be installed in narrow ceiling space easily.



Mini Duct

Large space air conditioning in a family room



Small space air conditioning

Various ranges of low capacity indoor units to suit small space such as a guest room



Compact Wall Mounted

Comfortable dining air conditioning with powerful airflow



Large Wall Mounted



Light Commercial

# HOTELS

Fujitsu General provides perfect total air conditioning systems that take into account comfort, energy saving, external appearance, safety and easy installation for small low-rise hotels.




## Large space air conditioning in the reception and lobby

Ultra-large duct type single split system suitable for large spaces with high ceilings



## Ventilation of the whole hotel supported

Outdoor air processing is essential in hotel spaces with a high degree of airtightness. The DX Kit can link up with air conditioners to ensure sufficient ventilation. This system can be expanded.

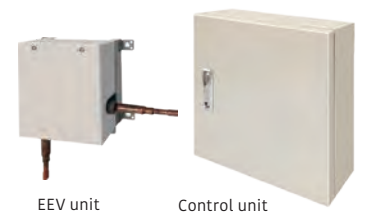

## Simple Remote Controller with sophisticated design

Suitable for hotels or offices as it is easily operated with no complex functions. Large LCD screen & simple operation buttons White colored backlight on monitor enable easy operation in dark.



Wired remote controller (design type) UTY-RVRG

## Simple and stylish design that harmonizes with the space

Wired remote controller (design type) with sophisticated design. The touch panel can be easily operated by swiping vertically and horizontally.




Hotel logo display

## Guest room air conditioning with excellent comfort, energy saving and easy installation

**Space saving**  
Mini duct type with 198 mm height and 450 mm depth. This can be installed in narrow ceiling space easily.



Mini Duct

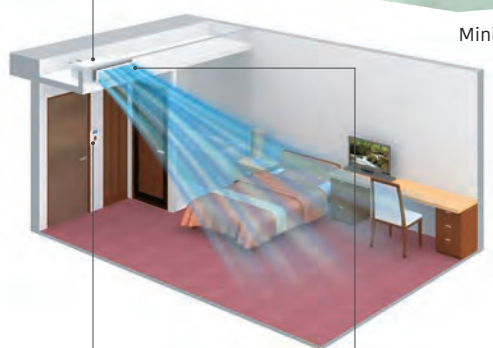

**Card key switch available**  
Using the card key prevents you from forgetting to switch off the air conditioner.



Use of an external connect switch

**Comfortable airflow that switches up and down air directions**

The Auto Louver Grille Kit achieves comfortable airflow by adjusting the air direction.




Auto Louver Grille Kit



Light Commercial

# SCHOOL

Fujitsu General provides the optimal number of connected indoor units for mid-sized educational institutions. The degree of freedom of the installation location selection is improved with a compact design that minimizes the installation area. Even one outdoor unit can cover the entire school building.

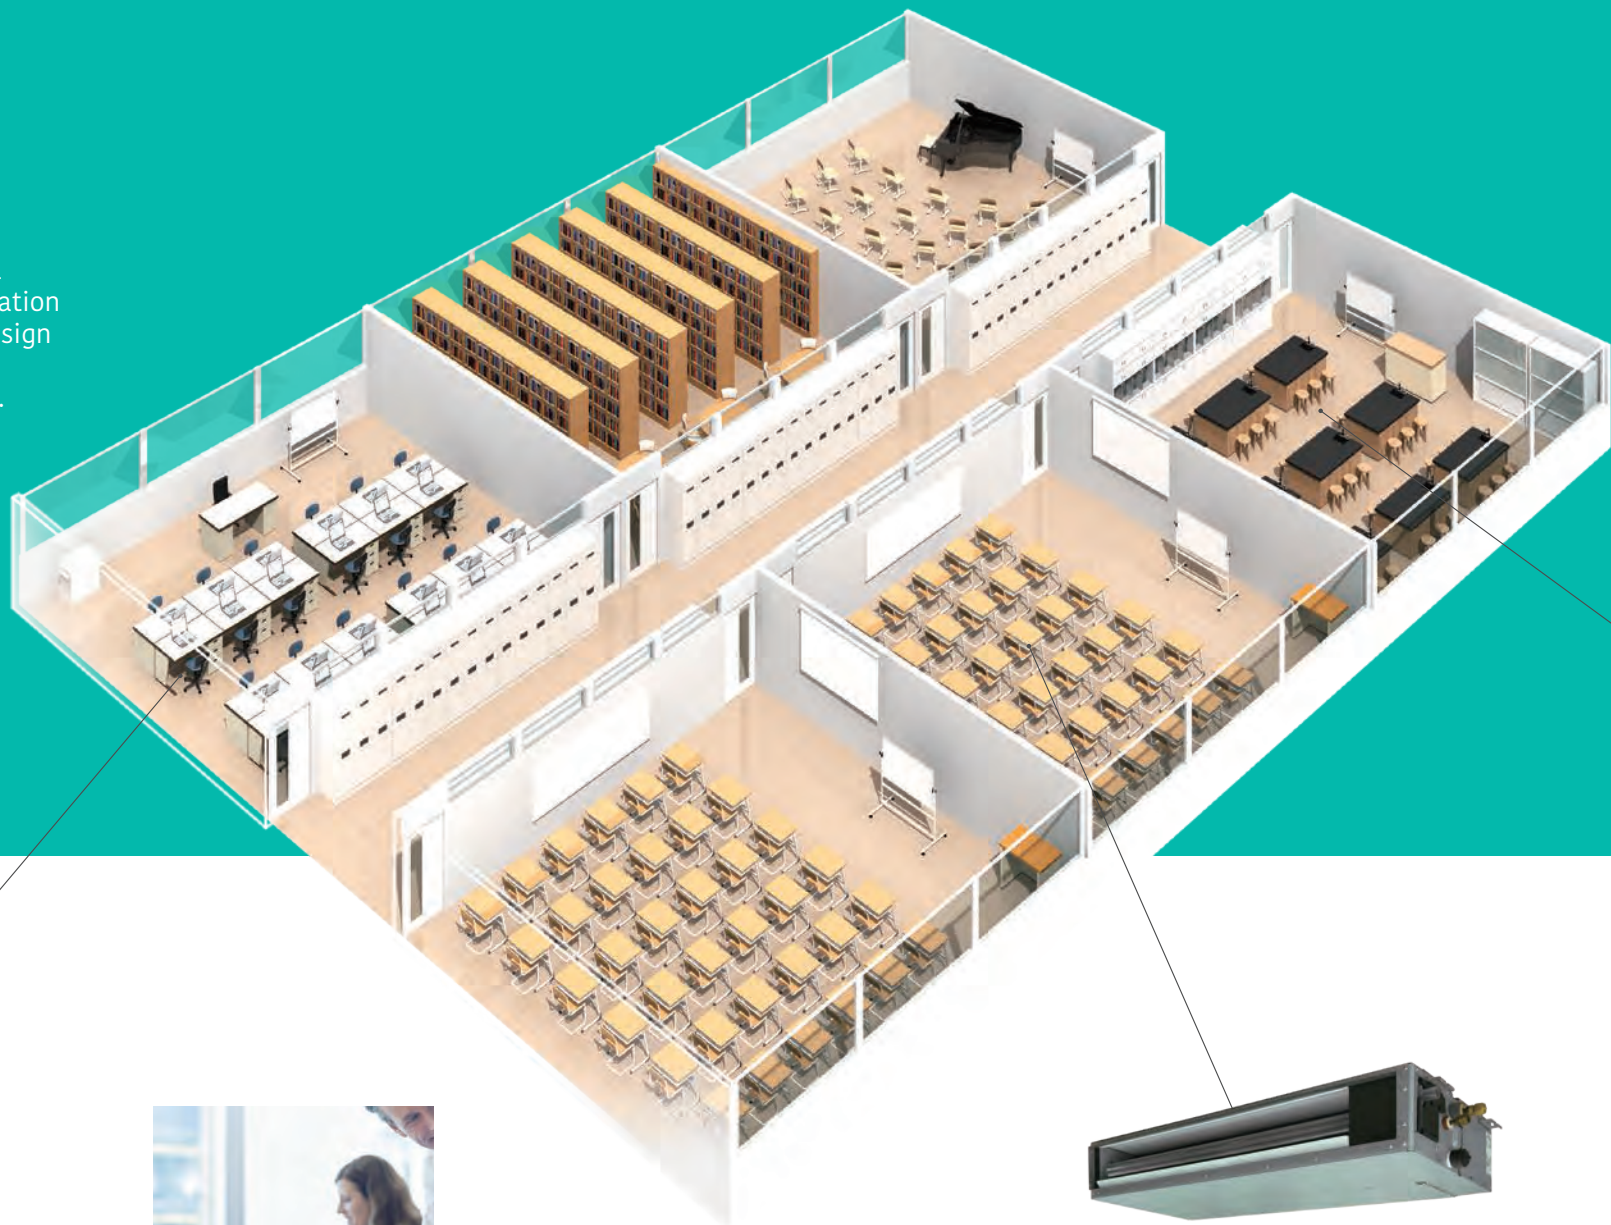

Cassette Circular Flow

### Comfortable room air conditioning without airflow feeling


Circular Airflow Cassette blows out in all directions without temperature unevenness



Individual airflow direction control to prevent people from being exposed to airflow



Energy saving operation when there are no people by linking up with human sensor

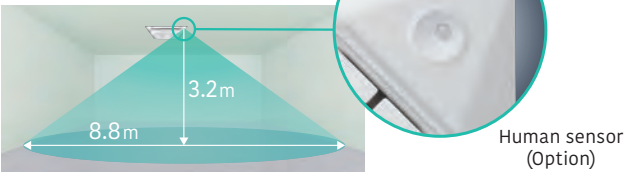

Human sensor (Option)



Central Remote Controller UTY-DCGGZ3

### Central remote controller with improved operability

Controls the temperature of each room easily, and manages and sets the operation control for a week. Energy-saving management by setting upper and lower temperature limits and operating prohibitions.



PC



Router

Wireless LAN

Fixed IP, IP forwarding and open Port required



Tablet PC


Smartphone

iOS, Android and/or Windows



### Control and monitoring

You can operate the main unit from your desk. Non-administrators can also operate the air conditioners with a computer, smartphone or tablet PC.

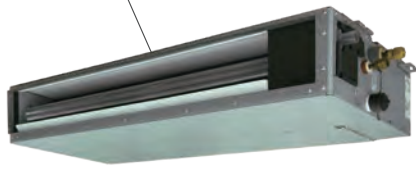

Mini Duct



Cassette Circular Flow



Wall Mounted

### Various indoor units

We have a lineup of indoor units that can also support complex applications – from normal classrooms to special classrooms and auditoriums. Air conditioners can be also added easily.




Light Commercial

# RESTAURANT, SHOPS

Fujitsu General provides perfect total air conditioning systems that offer smooth support by tenant, by purpose and by customer visit frequency in shops and restaurants with multiple lighting and a high density of customers.

## RESTAURANT

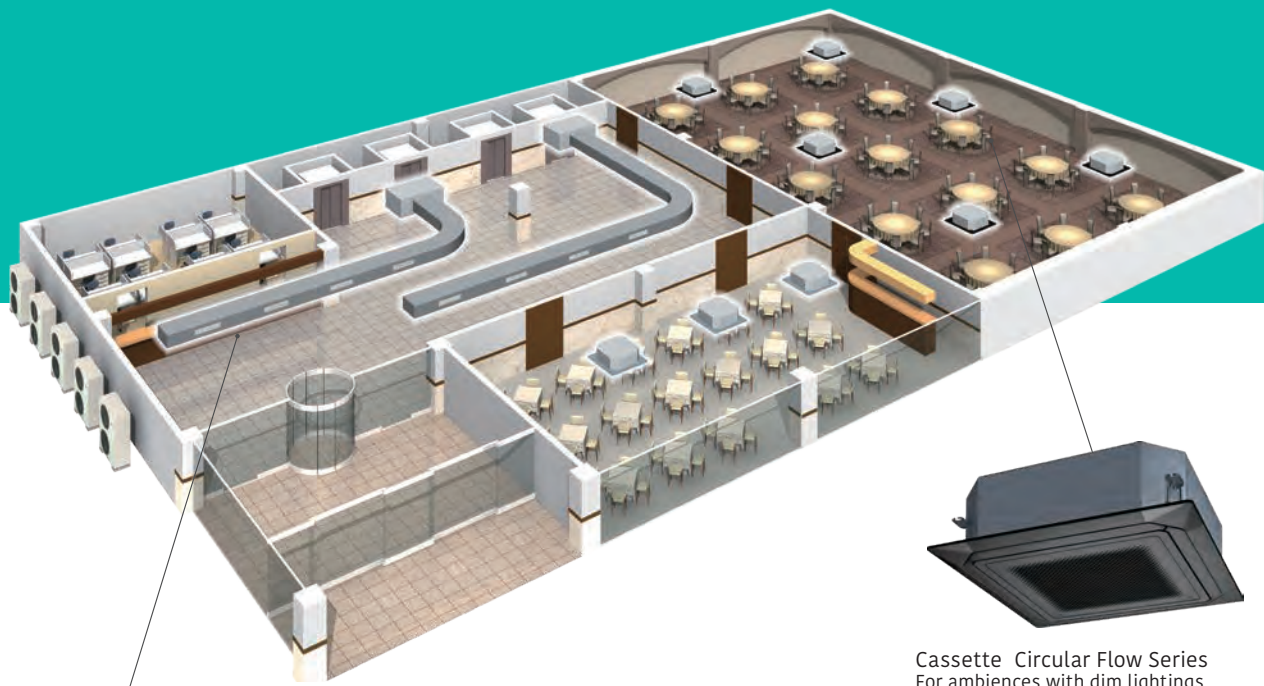

Cassette Circular Flow Series  
For ambiances with dim lightings



### Appropriate air conditioning in the atrium space

Appropriate air conditioning of the high ceiling and glass-sided atrium space with a large duct system



### Color variations by two panels

Both black and white panels are available for Cassette type. Black panel is suitable for the dark place such as a restaurant with atmosphere. White panel is usually used at bright areas such as offices. (Available to single split and VRF indoor units)

High Static Pressure Duct



## SHOPS



Slim type




Large type

Circular Flow Cassette



### Uniform temperature air conditioning

Achieve a comfortable air conditioning spread to every corner of the room by circular flow & wide vertical airflow.





Commercial

# LARGE BUILDING

Fujitsu General provides modular type VRF systems that seek high efficiency, comfort, design freedom, easy installation and reliability for skyscraper buildings.



## Individual air conditioning system for large buildings

VRF Series lineup to meet various needs such as cooling only models and models compatible with a high outdoor air temperature of 55°C

NEW




## VRF VC-V

- 8 HP - 80 HP 37 Models
- Standard combination: 8 HP to 80 HP/37 models
- Energy efficiency combination: 16 HP to 44 HP/14 models

## Centralized control of both air conditioning and lighting

It is possible to perform centralized control to stop the operation of lighting and ventilation equipment in addition to air conditioner. This is useful in energy saving management over the whole building.

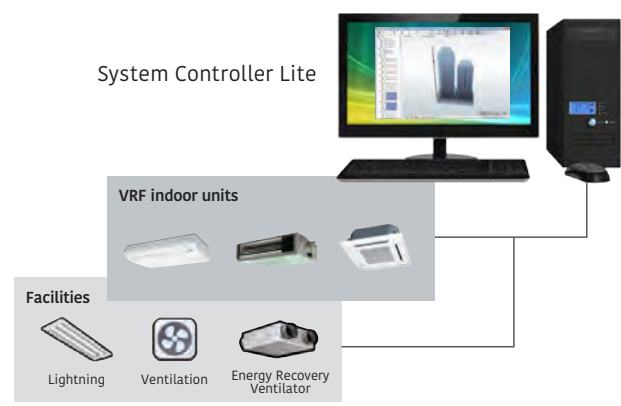


## Difference in height Up to 110 m

The height difference between the outdoor unit and the indoor unit is usually 50 m for the VC-V and V-III Series, but by installing the pressure sensor kit it is possible to expand it to 110 m.



## Ventilation(AHU) linked with VRF system

Fujitsu General's DX Kit enable other manufacture's air handling units (AHU) to be incorporated into a Fujitsu VRF system. Possible to control comfortable air conditioning and ventilation.

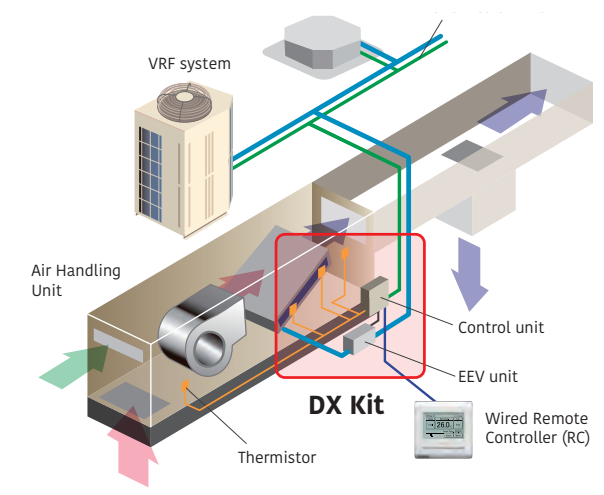


## 4-way Flow Cassette




### Improvement of the airflow distribution

The Louver design distributes air leaving a space between the chassis and the ceiling allowing far and wide air flow distribution.

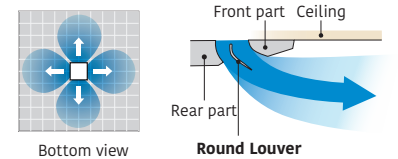

### High ceiling mode

This cassette can be installed up to a height of 4.2 m (36/45/54).

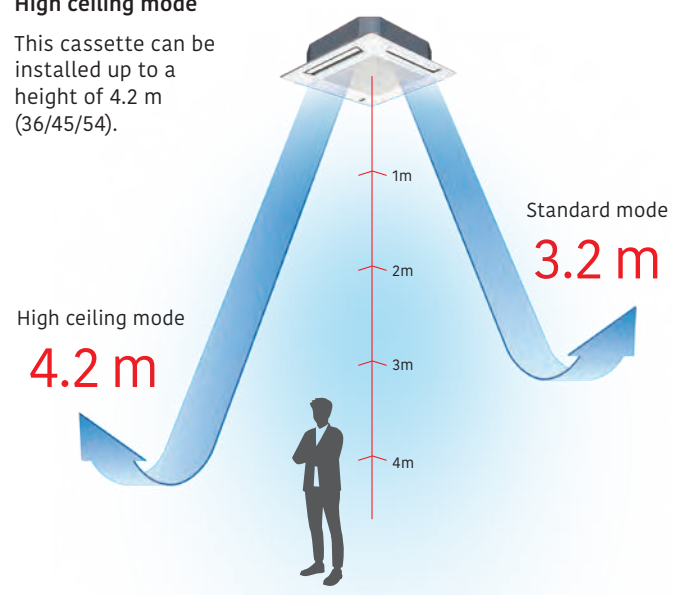



# VRF CORE TECHNOLOGY

HIGH ENERGY EFFICIENCY

HIGH RELIABILITY

DESIGN FLEXIBILITY

MORE COMFORT

EASY INSTALLATION

EASY SERVICE & MAINTENANCE

**VRF systems can be designed to create an air conditioning solution to suit most buildings requirements.**

VRF Systems can be designed to effectively provide an air conditioning solution from a large domestic residence through to a large scale commercial building.



# HIGH ENERGY EFFICIENCY



## Highly Energy Efficiency

Significantly efficiency is improved by using DC twin rotary compressor, inverter technology, and large heat exchanger.




### Large VRF

EER




### Small VRF

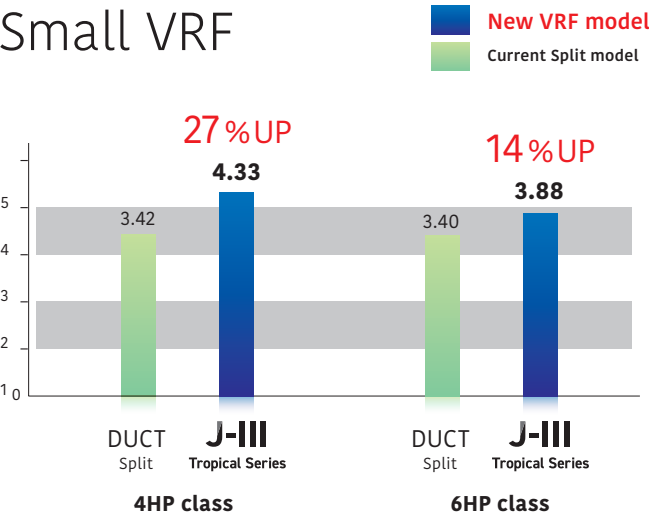

## Operation Performance is Efficiently Controlled.



### Room temperature set point limitation

The minimum and maximum temperature ranges can be limited, which provide further energy saving while maintaining the comfort of the occupants.

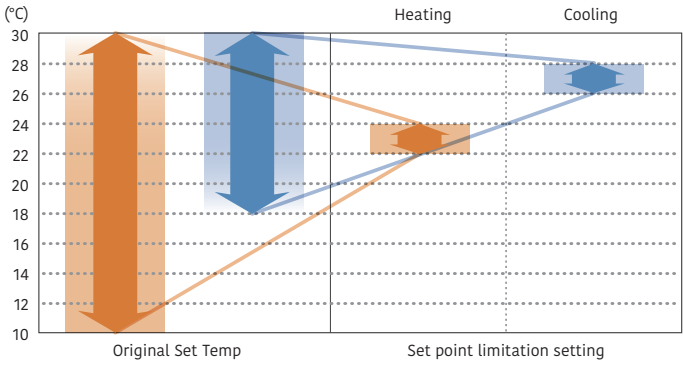


### Auto-off timer

Wired remote controller is equipped with an OFF timer function that automatically stops operation when a fixed time has elapsed from the start of operation. This prevents waste of energy. Furthermore a wired remote controller can set up the interval of time in case operation stops.

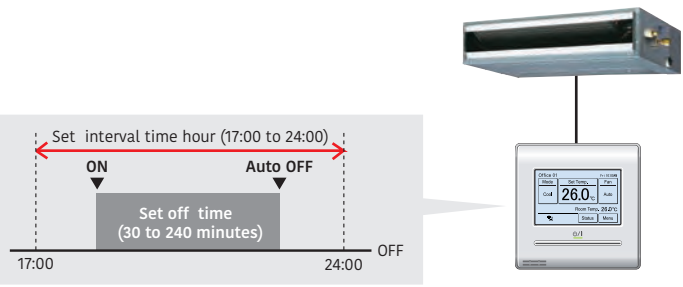


### Energy saving management

A variety energy saving operations can be set and managed depending on the season, weather, and time period. Excellent energy saving operation is performed by using System Controller.

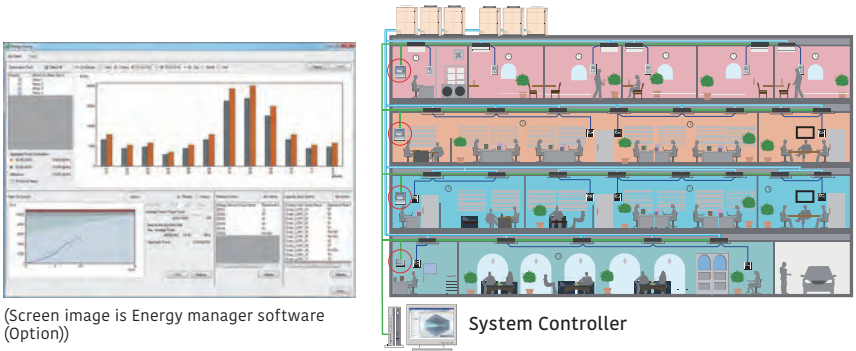

### Capacity limit operation


Operation capacity can be set in 5 steps for rated capability. The power consumption at peak is cut down and the maximum load is suppressed.

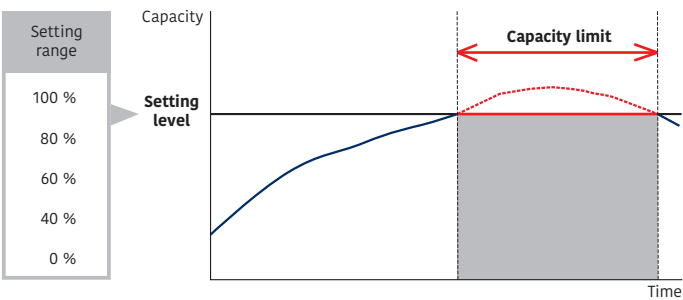



# HIGH RELIABILITY


## Heavy anti-corrosion treatment design

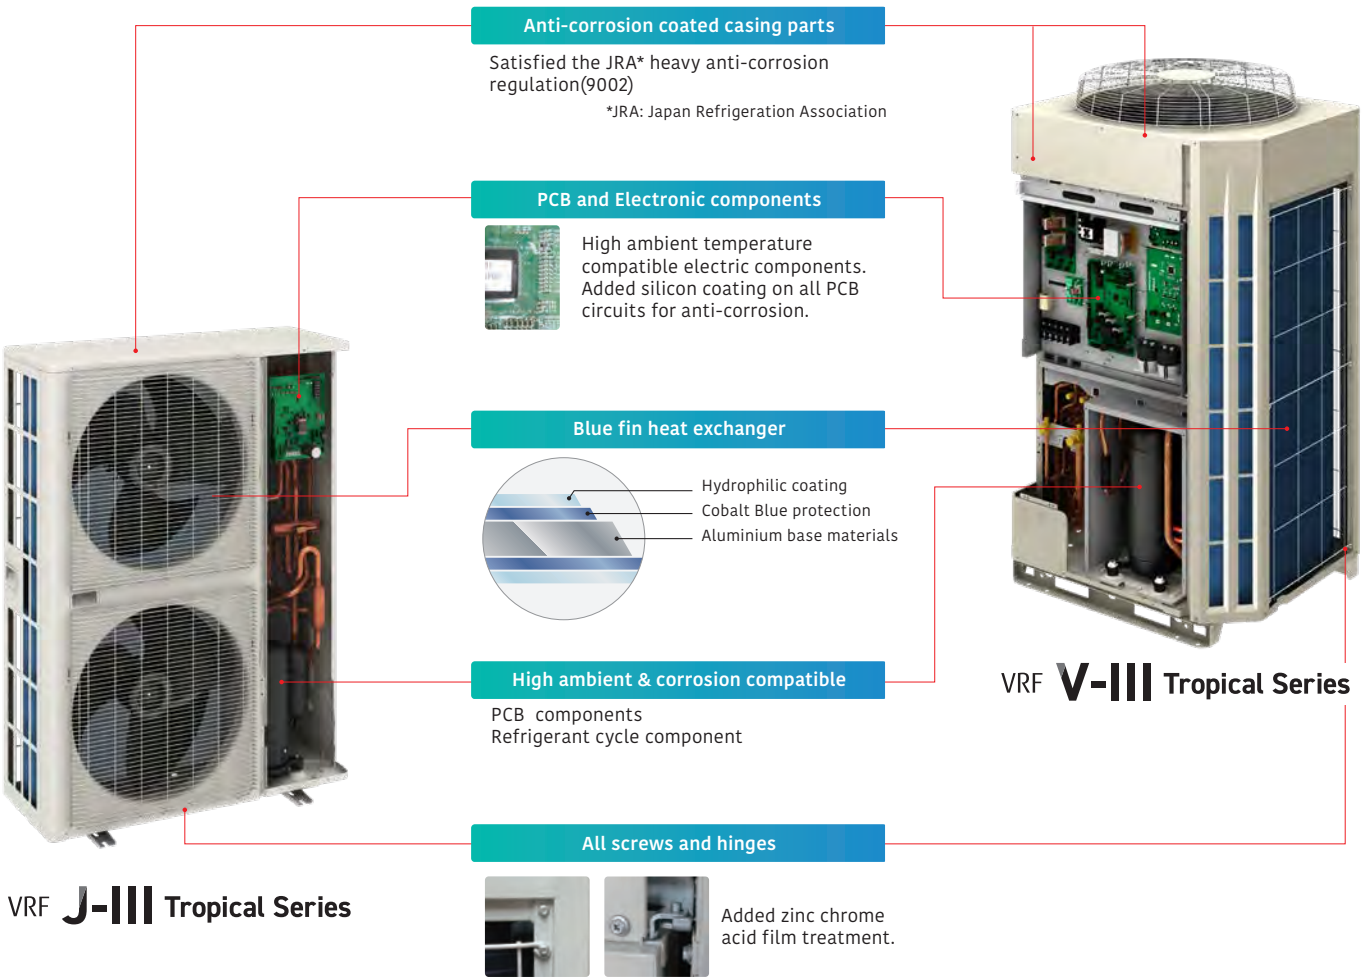

- Take special notice of the following in order to enhance the anti-corrosion effect.
- Keep the unit free of direct sea breeze as much as possible by installing a windshield plate or placing the unit on the leeward side of the building.
  - Arrange the unit so that any salt attached to the enclosure can be washed away by rain.
  - Any water left on the bottom of the outdoor unit can increase corrosion. To prevent interference with the water drain, be careful of the tilting angle of the unit.
  - Wash the enclosure regularly with water to remove any salt attached.
  - Repair any damages on the unit (i.e. scratches) caused during installation or maintenance.
  - Check the condition of the unit regularly. (If necessary, retreat the unit for anti-corrosion or make parts replacements.)
  - Make sure the drainage is secured at the foundation.

## Life-extending operation


Outdoor unit rotational operation  
The compressor starting order is rotated so that the running time is shared.

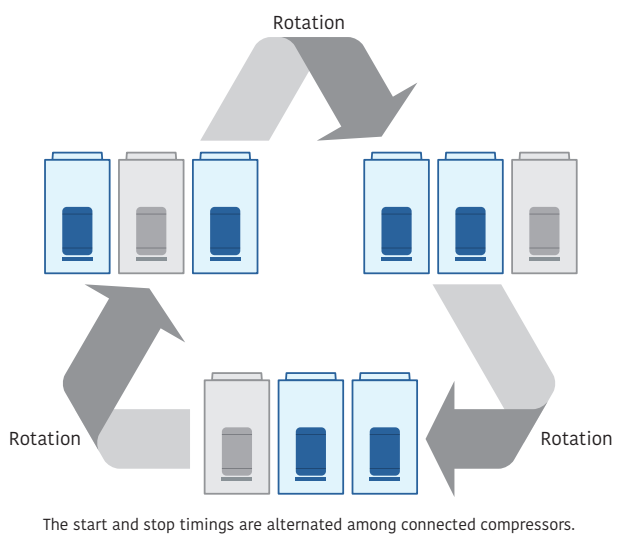

## Backup operation


If one compressor fails, backup operation will be performed by the remaining compressors\*.

NOTE: Need to change the Outdoor unit setting in order to perform the Backup Operation

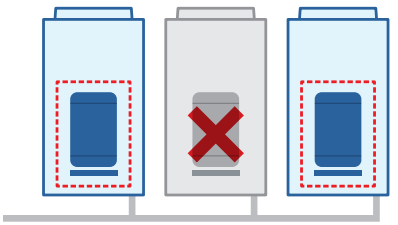


## Advanced refrigerant control

Innovative compressor control logic has been introduced in order to balance the refrigerant mass flow rate of each outdoor unit by controlling the inverter speed.

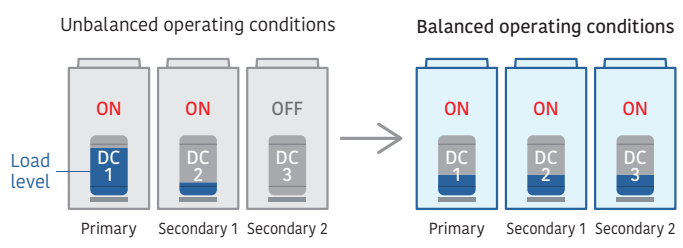

## Liquid flow back protection

By adopting a large sized accumulator, the not completely vapourised refrigerant stays inside of the accumulator to ensure no liquid refrigerant is being fed into the compressor.

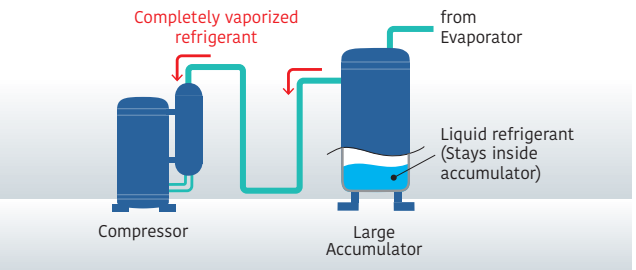

## Oil Recovery operation


Periodic oil recovery operation is done automatically in order to feed back oil from the indoor unit to compressor.



# DESIGN FLEXIBILITY

Overall piping length 1,000 m


Total pipe length  
**1,000 m maximum**

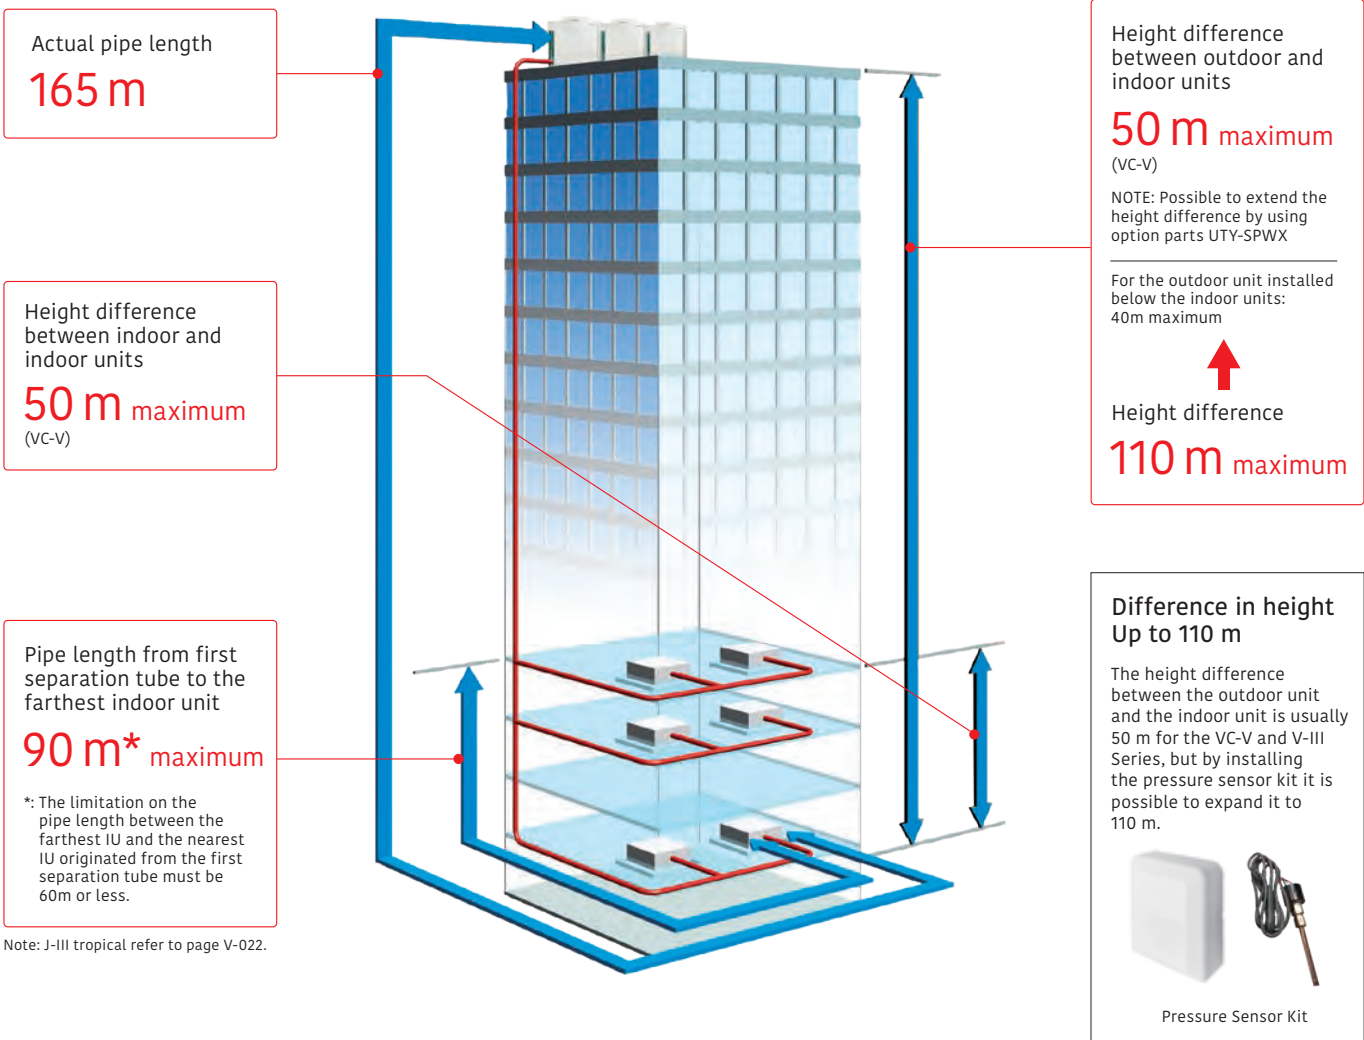


## High static pressure

The outdoor unit can have a condenser hood easily connected with a static pressure of 82Pa. This allows outdoor units to be installed within plant rooms in high rise buildings.


Powerful discharge air prevents a short-circuit.

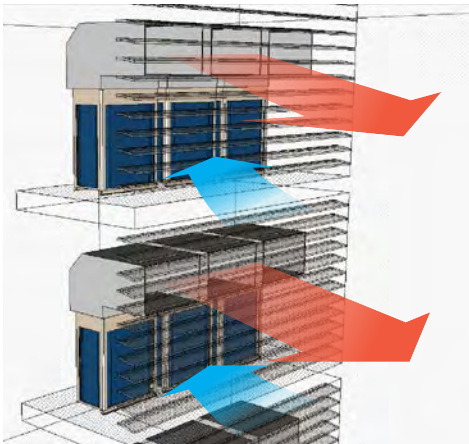

Previous model



V-III tropical, VC-V

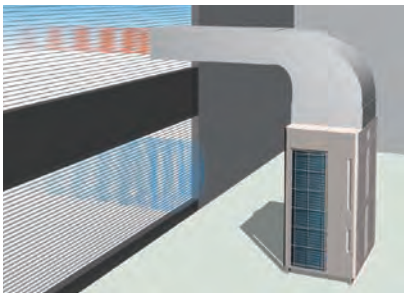

Large diameter fan and DC motor has been utilized allowing an external static pressure of 82Pa. This is approximately 2.6 times greater than the previous model.

**82 Pa (V-III tropical)**  
**82 Pa (VC-V)**

## High capacity connection

### VRF VC-V

8HP-80HP  
37models



Connectable indoor unit capacity range  
**50 % to 150 %**

Connectable indoor unit number  
**up to 64**

### VRF V-III Tropical Series

8HP-54HP  
39models



Connectable indoor unit capacity range  
**50 % to 130 %**

Connectable indoor unit number  
**up to 55**

### VRF J-III Tropical Series

4HP-6HP  
6models




Connectable indoor unit capacity range  
**50 % to 130 %**

Connectable indoor unit number  
**up to 9**


## High ambient operation design

Installation in extreme temperature conditions is possible due to an increase in operational range.


### VRF VC-V

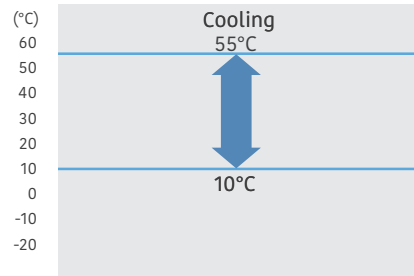

### VRF V-III Tropical Series

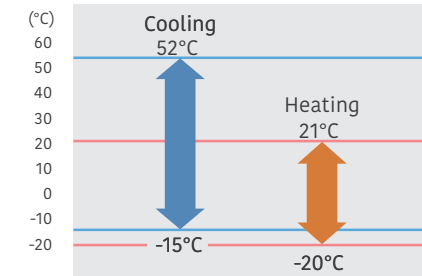

### VRF J-III Tropical Series

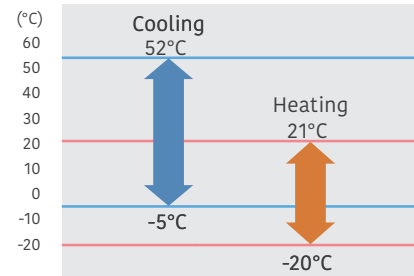

\*. Note : When a multiple outdoor unit connection is used, operating range is from -5°C to 52°C in cooling.




# MORE COMFORT




## Precision refrigerant flow control

Precise and smooth refrigerant flow control is achieved by using a DC Inverter control in conjunction with individual indoor unit electronic expansion valve control. This allows high precision comfortable temperature control of  $\pm 0.5^{\circ}\text{C}$ .

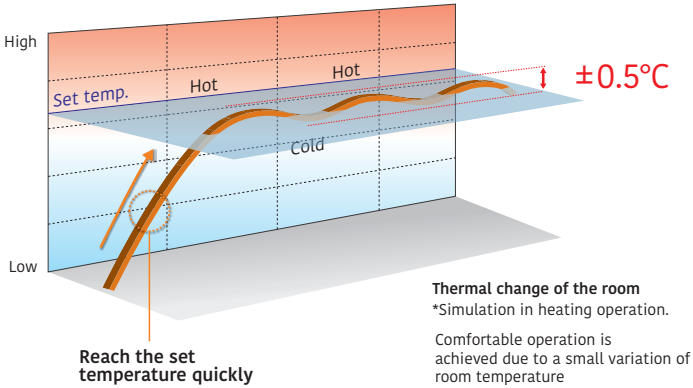

## Powerful cooling capacity design



High cooling power has been realized by adopting large heat exchanger, high capacity DC inverter compressor, sub-cooler equipment, etc.

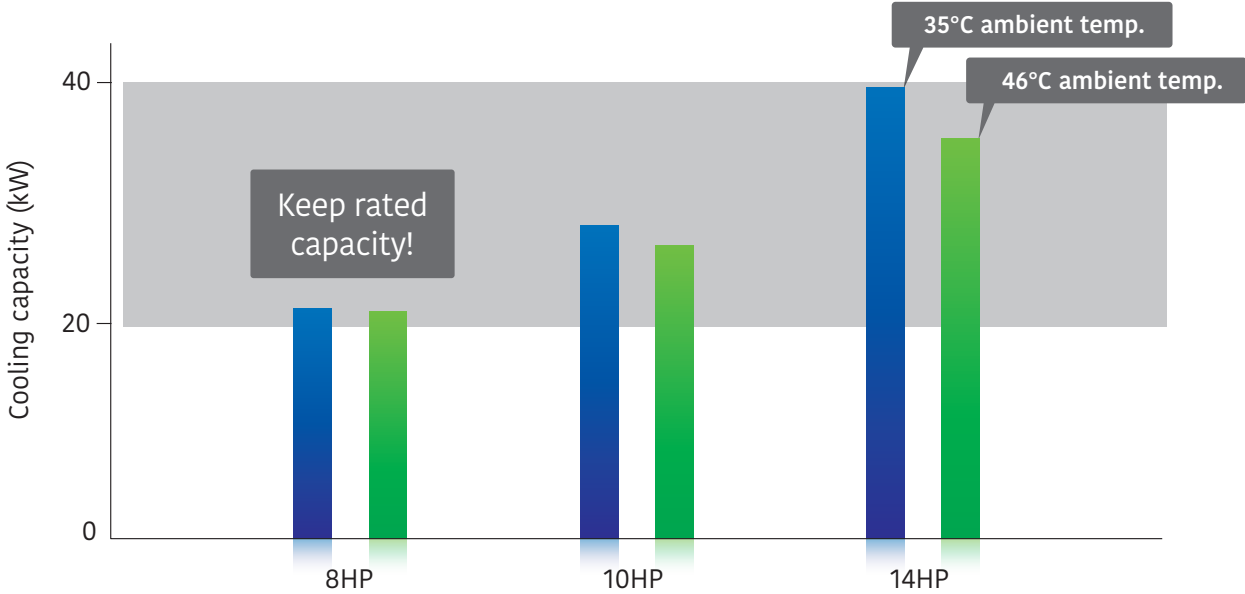

## Quiet operation


### Low noise mode

Two low noise modes can be selected automatically by quiet priority setting and capacity priority setting depending on the indoor environment and outside temperature load. This feature can be controlled via outdoor unit external input and/or system controller.

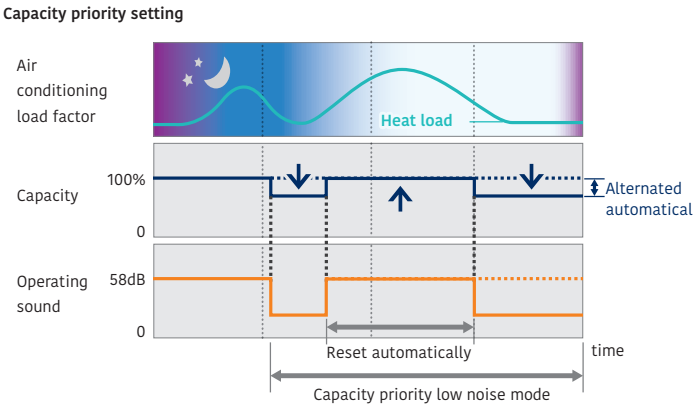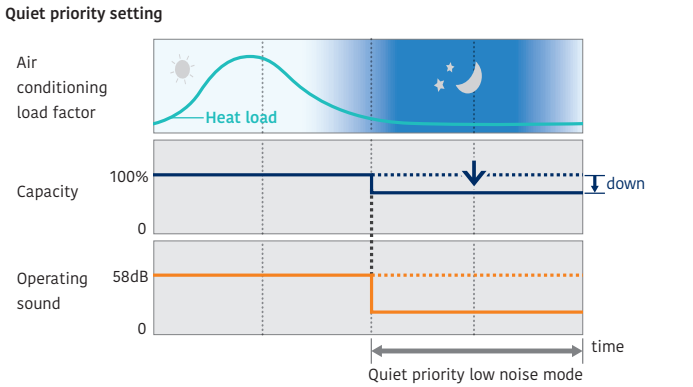


## Touch Panel Wired Remote Controller

The wired remote controller has an easy to use LCD touch panel. This controller has a back light function and can easily control the air conditioner which provides a better energy saving operation of the air conditioner.

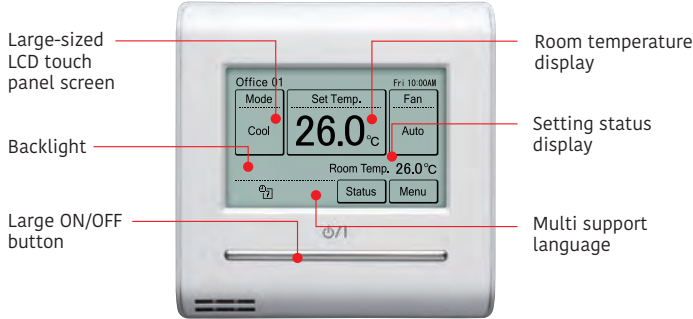

## Non-stop oil recovery operation

A comfortable room condition is maintained during oil recovery mode because the product continues to operate without stopping the cooling or heating operation.

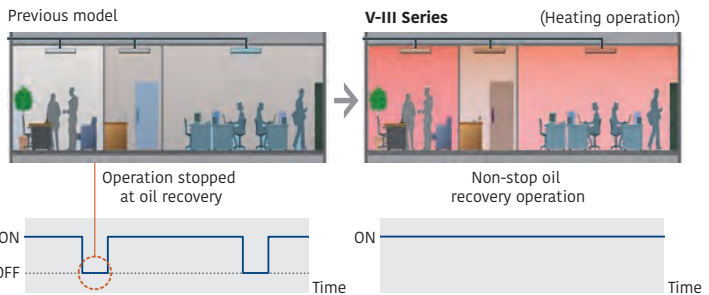




# EASY INSTALLATION

## Easily transported

A lifting strap can be hooked onto an outdoor unit  
Design of outdoor unit allows for lifting straps to be used



Transportable by forklift  
The outdoor unit can be lifted and transported by forklift.




Fits into a small elevator.  
The outdoor unit can be lifted and transported by forklift.



## Easy access

The removable L-shaped front panel provides more room for installation and service work. Multiple installations can be performed easily and efficiently even in tight spaces.

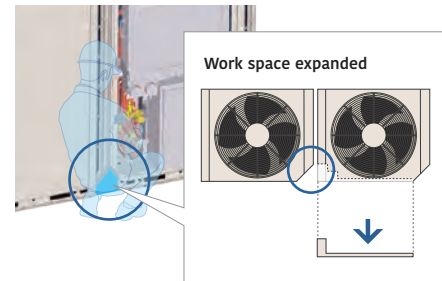

Front access reduces installation intervals


## Flexible piping connection

Piping and wiring can be accessed from the front, left, right, and bottom.




## Simple wiring work

Installation of the wiring systems is made easier as the communication wiring can be installed continuously between the indoor and outdoor.



or




Maximum wiring length:  
**3,600 m**

Note: The automatic address setting is not available on a serially connected multiple refrigerant system.


## Easy evacuation - using vacuum mode function

The vacuum mode function enables all expansion valves of indoor units to be fully opened, making it easy to evacuate all the air inside pipe lines and indoor units.

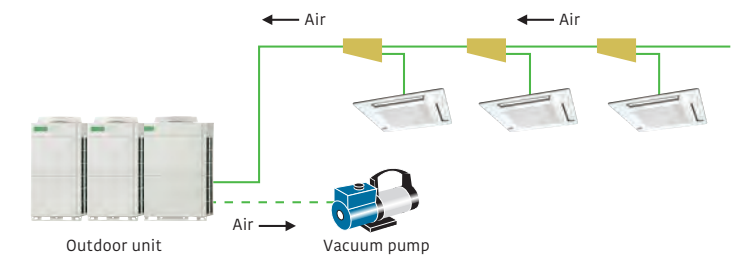

## Automatic address setting

The address of the indoor unit and signal amplifier can be set through the automatic function setting on the outdoor unit PCB.

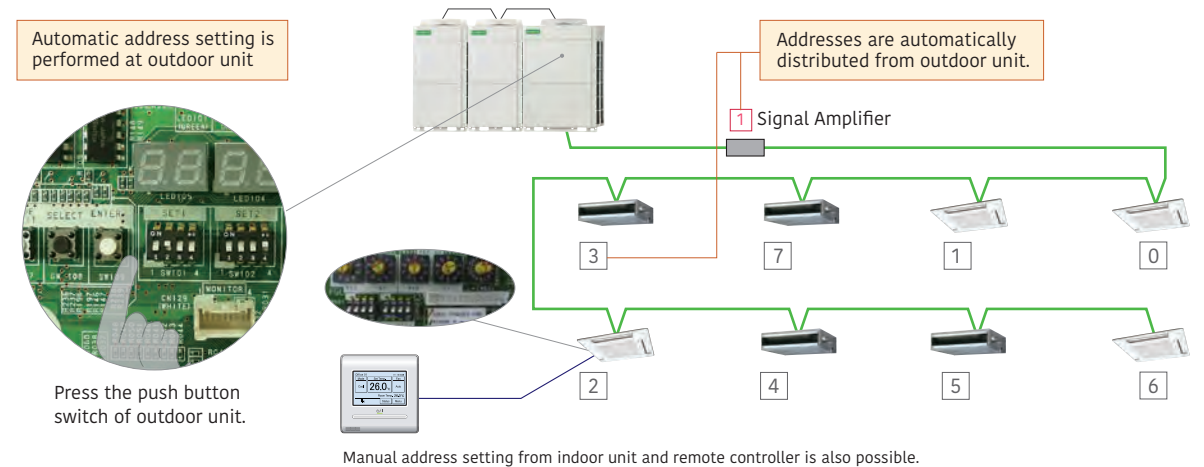

## Easy commissioning by Service Tool

### • Service Tool (UTY-ASGXZ1)

The Service Tool checks the refrigerant temperature and pressure, and the operating status of the electronic expansion valves, making it easy to determine if the units are connected properly.



### • Central Remote Controller (UTY-DCGGZ3)

After the VRF system has been installed. Conveniently, the "test run" required to verify proper system operation can be performed from a nearby Central RC.





# EASY SERVICE & MAINTENANCE




## Design for Easy Maintenance

7 segment LED is used to make it easy to check the details about the function setting status, refrigerant temperature, pressure, compressor operation time, and other factors for each model to make it easy to perform self-diagnostics.



**Easy to read 7-segment LED :** Confirm detailed operational and error status without using any specific equipment.




- 7-segment LED**
- Operation mode status
  - Discharge temperature/Pressure status
  - Compressor operation indication
  - Address/type/number of outdoor unit




Error status can be checked easily via the indoor unit wired controller

An error code is displayed on a liquid crystal screen.


**Wired Remote Controller**

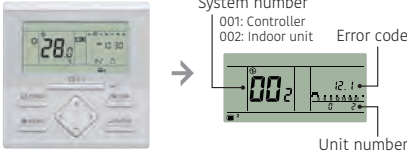

**Simple Remote Controller**




**Wired Remote Controller (Touch panel)**

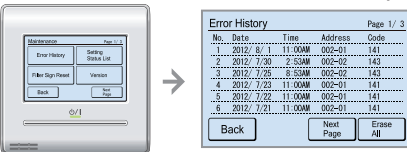

Error status / Error history

No.	Date	Time	Address	Code
1	2012/ 8/ 1	11:00AM	002-01	141
2	2012/ 7/30	2:52AM	002-02	143
3	2012/ 7/29	8:55AM	002-02	142
4	2012/ 7/29	11:00AM	002-01	141
5	2012/ 7/28	11:00AM	002-01	141
6	2012/ 7/21	11:00AM	002-01	141


Error status can be checked easily by outdoor unit display

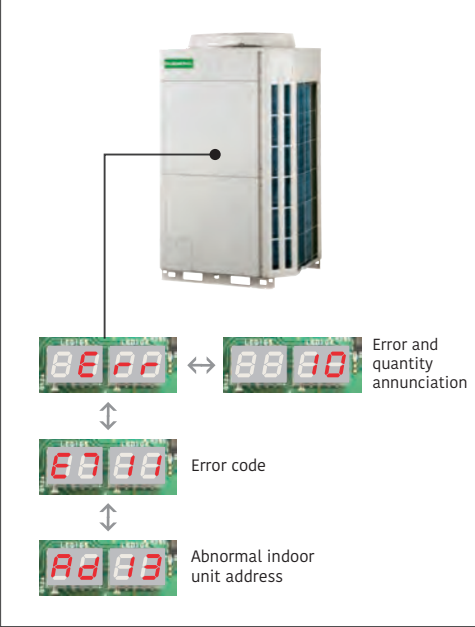

## Error diagnosis by Service Tool


**Connection to Service Tool**

- Detail operation status and recent error history can be checked and analyzed by using the Service Tool.
- Last 5 min. operation memory can be also be recorded.

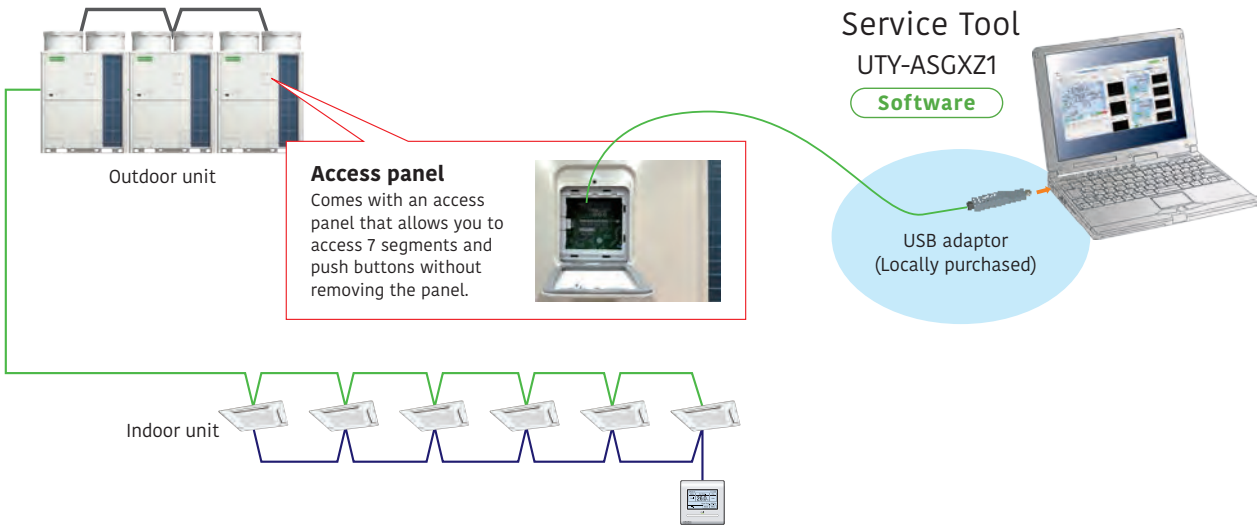

## Remote monitoring

The Web Monitoring system allows you to view system operation anytime over the internet, ensuring issue free operation. The operating VRF network system in the building can be monitored real time over the Internet.

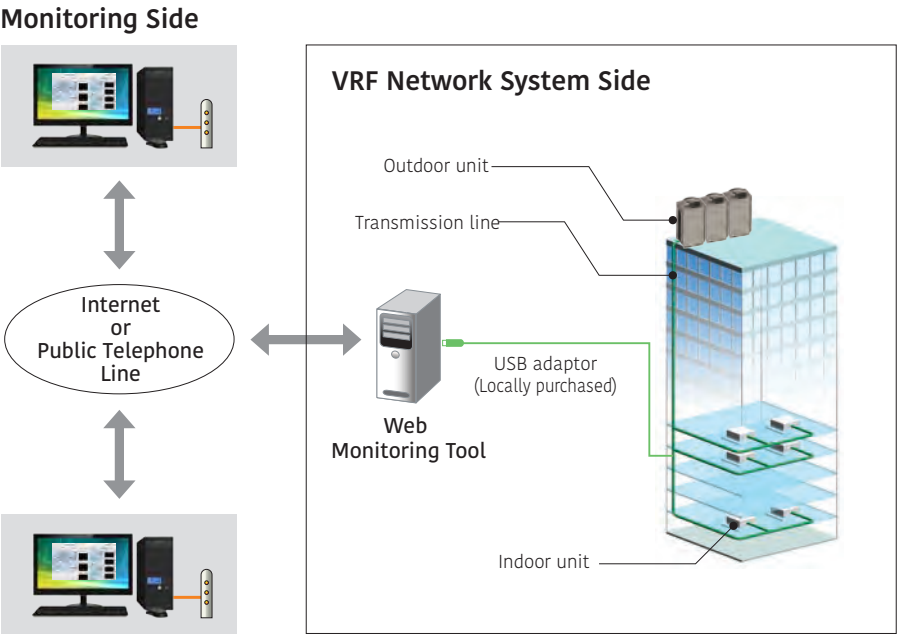



# VRF OUTDOOR UNITS

## VRF LINE-UP

HEAT PUMP TYPE J-III TROPICAL Series

COOLING ONLY TYPE VRF VC-V Series

HEAT PUMP TYPE V-III TROPICAL Series

The VRF (V-III tropical, J-III tropical, and VC-V) has a total of 100 models to meet the building Air-conditioning requirement


VRF Systems can be designed to effectively provide an air conditioning solution from a large domestic residence through to a large scale commercial building.



VRF LINE-UP

Fujitsu General provides multi air conditioning systems for buildings VRF Series matched to the size and application of the property.

Outdoor units range

HP	4	5	6	8	10	12	14	16	18*	20	22	24	26	28*	28	30	32	34*	34	36*	36	38*	38	40	42	44*	46*	48	50*	52*	54*	56	58	60	62	64	66	68	70	72	74	76	78	80																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
BTU/h	36,000	45,000	54,000	72,000	90,000	108,000	126,000	144,000	162,000	180,000	198,000	216,000	234,000	252,000	252,000	270,000	288,000	306,000	306,000	324,000	324,000	342,000	342,000	360,000	378,000	396,000	414,000	432,000	450,000	468,000	486,000	504,000	522,000	540,000	558,000	576,000	594,000	612,000	630,000	648,000	666,000	684,000	702,000	720,000																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
Ton	3.0	3.8	4.5	6.0	7.5	9.0	10.5	12.0	13.5	15.0	16.5	18.0	19.5	21.0	21.0	22.5	24.0	25.5	25.5	27.0	27.0	28.5	28.5	30.0	31.5	33.0	34.5	36.0	37.5	39.0	40.5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
J-III Tropical Series	<div></div> <div>High Efficiency (Single phase)</div> <div>AJH040 LBTBHN    AJH045 LBTBHN    AJH054 LBTBHN</div>																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
	<div></div> <div>High Efficiency (3 phase)</div> <div>AJH040 LETBHN    AJH045 LETBHN    AJH054 LETBHN</div>																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			



# Heat Pump

for Small-capacity type


VRF **J-III** Tropical 

Fujitsu General provides air conditioning systems for a wide range of applications from small office buildings and stores to large houses.

## System Outline

### System configuration example

- This system is used for small and medium-sized buildings.
- 1 refrigerant system is used for each outdoor unit.
- Connection of multiple indoor units using separation tubes and headers.

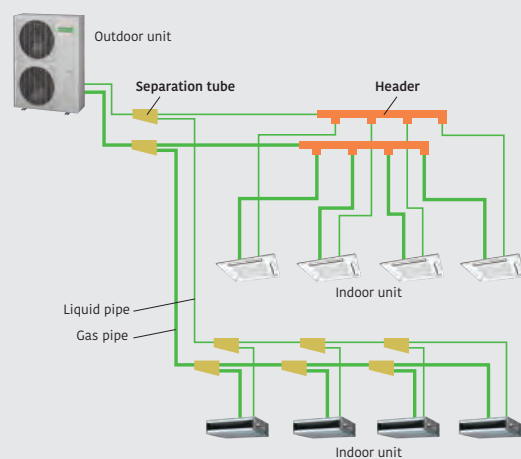

### High Energy Efficiency

Heat pump inverter control is used to achieve an efficient cooling and heating operation in any indoor unit combination.

### Flexible systems for small- and medium-size buildings air conditioning


Space saving design and long piping design allow for flexible installation on the roofs or balconies of small- and medium-size buildings. Multiple indoor units of various capacities and types can be connected.

## Features

### Energy efficiency

Top class high COP is achieved for all models by large heat exchanger, high efficient DC twin compressor, and our own technologies.

#### High EER / COP

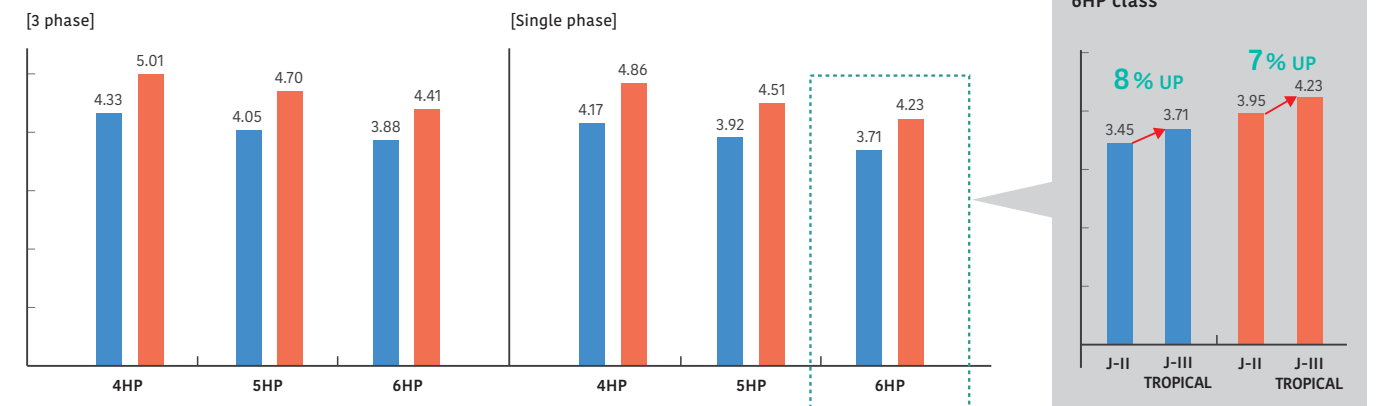


### Advanced high efficiency technology



#### Large propeller fan

High performance and low noise realized by large propeller and optimization of angle.




#### Large heat exchanger

Heat exchange performance is substantially improved by mounting of 3-row large heat exchanger.



#### Subcool heat exchanger

Cooling performance is improved by mounting of dual tube heat exchanger.



## All Inverter



#### INVERTER control PCB

Efficiency is improved by mounting of new active filter module.



#### INVERTER fan motor

Miniaturized, low noise, high efficiency, multi-stage DC fan motor is mounted.



#### INVERTER Compressor


Efficiency in all load regions is good. Especially good performance from low to medium at normal operation.

**Made in JAPAN**




## Long piping capability

Our advanced refrigerant control technology allows us to achieve a total refrigerant piping length of 180 m. This opens up new possibilities in system design.

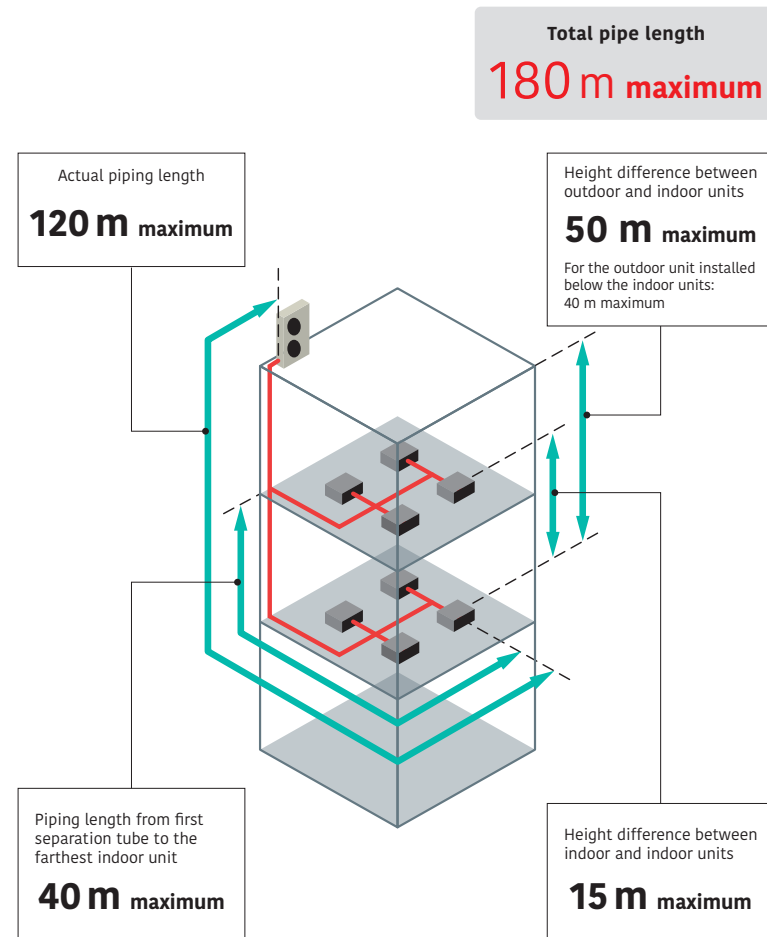


## Non-stop oil recovery operation

A comfortable room condition is maintained during oil recovery mode because the product continues to operate without stopping the cooling or heating operation.

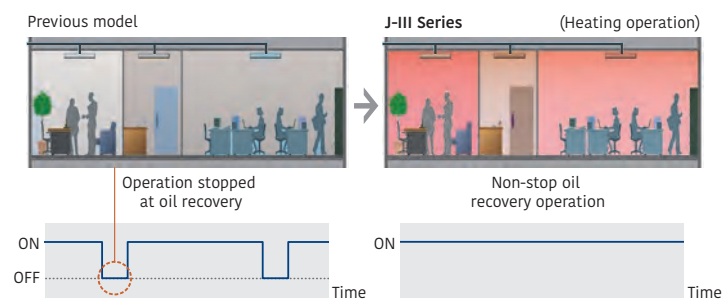

## Easier Installation

Connection check function : Possible to confirm whether wiring connection and address setting are correct by a quick check run function.

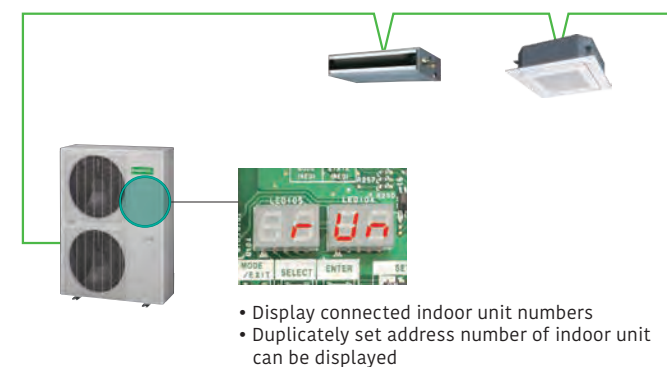

## Specifications

Rating Capacity range	HP	4	5	6	4	5	6
	Btu/h	36,000	45,000	54,000	36,000	45,000	54,000
	Ton	3.0	3.8	4.5	3.0	3.8	4.5
Model name		AJH040LTBHN	AJH045LTBHN	AJH054LTBHN	AJH040LETBHN	AJH045LETBHN	AJH054LETBHN
Connectable indoor units	Number	1 to 7	1 to 8	1 to 9	1 to 7	1 to 8	1 to 9

Power source			1 Phase, 220 to 240 V, 50 Hz			3 Phase, 380 to 415 V, 50 Hz		
			1 Phase, 230 V, 60 Hz			3 Phase, 400 V, 60 Hz		
Capacity	Cooling (T1 / T3) Heating	kW	12.1 / 10.3 13.6	14.0 / 11.1 16.0	15.5 / 11.5 18.0	12.1 / 10.3 13.6	14.0 / 11.1 16.0	15.5 / 11.5 18.0
Input power (Outdoor unit)	Cooling (T1 / T3) Heating	kW	2.90 / 3.47 2.80	3.57 / 3.77 3.55	4.18 / 3.92 4.26	2.79 / 3.30 2.71	3.46 / 3.57 3.40	3.99 / 3.71 4.08
Current (Outdoor unit) *1	Cooling (T1 / T3) Heating	A	12.7 / 15.2 12.3	15.7 / 16.6 15.6	18.4 / 17.2 18.7	5.2 / 6.2 5.0	6.6 / 6.6 6.5	7.7 / 6.9 7.8
ER (System)	Cooling (T1/ T3)	W/W	4.03 / 2.88	3.81 / 2.87	3.61 / 2.85	4.18 / 3.03	3.93 / 3.02	3.78 / 3.01
CSPF (System)		Btu/hW	16.9	16.9	16.1	17	17	16.2
COP (System)	Heating	W/W	4.69	4.38	4.12	4.84	4.57	4.30
Airflow rate	High	m³/h (l/s)	6,200 (1,722)	6,400 (1,778)	6,900 (1,916)	6,200 (1,722)	6,400 (1,778)	6,900 (1,916)
Sound pressure level	Cooling Heating	dB(A)	50 52	51 53	53 55	50 52	51 53	53 55
Refrigerant	Type		R410A	R410A	R410A	R410A	R410A	R410A
Net Dimensions	Height Width Depth	mm	1,334 970 370	1,334 970 370	1,334 970 370	1,334 970 370	1,334 970 370	1,334 970 370
Net Weight		kg	120	120	120	120	120	120
Connection pipe diameter	Liquid Gas	mm	9.52 15.88	9.52 15.88	9.52 19.05	9.52 15.88	9.52 15.88	9.52 19.05
Operation temperature range	Cooling Heating	°CDB	-5 to 52 -20 to 21	-5 to 52 -20 to 21	-5 to 52 -20 to 21	-5 to 52 -20 to 21	-5 to 52 -20 to 21	-5 to 52 -20 to 21

Note: Specifications are based on the following conditions.

Cooling(T1): Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB

Cooling(T3): Indoor temperature of 29°CDB / 19°CWB, and outdoor temperature of 46°CDB / 24°CWB

Heating: Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.


Pipe length: 7.5 m. Height difference between outdoor and indoor unit: 0 m.

\*1: Refer to the section Chapter 6 “4-2. Power supply cable wiring” when selecting the circuit breaker.

### Dimensions

**Models :** AJH040LBTBHN / AJH045LBTBHN / AJH054LBTBHN / AJH040LETBHN / AJH045LETBHN / AJH054LETBHN

(Unit : mm)

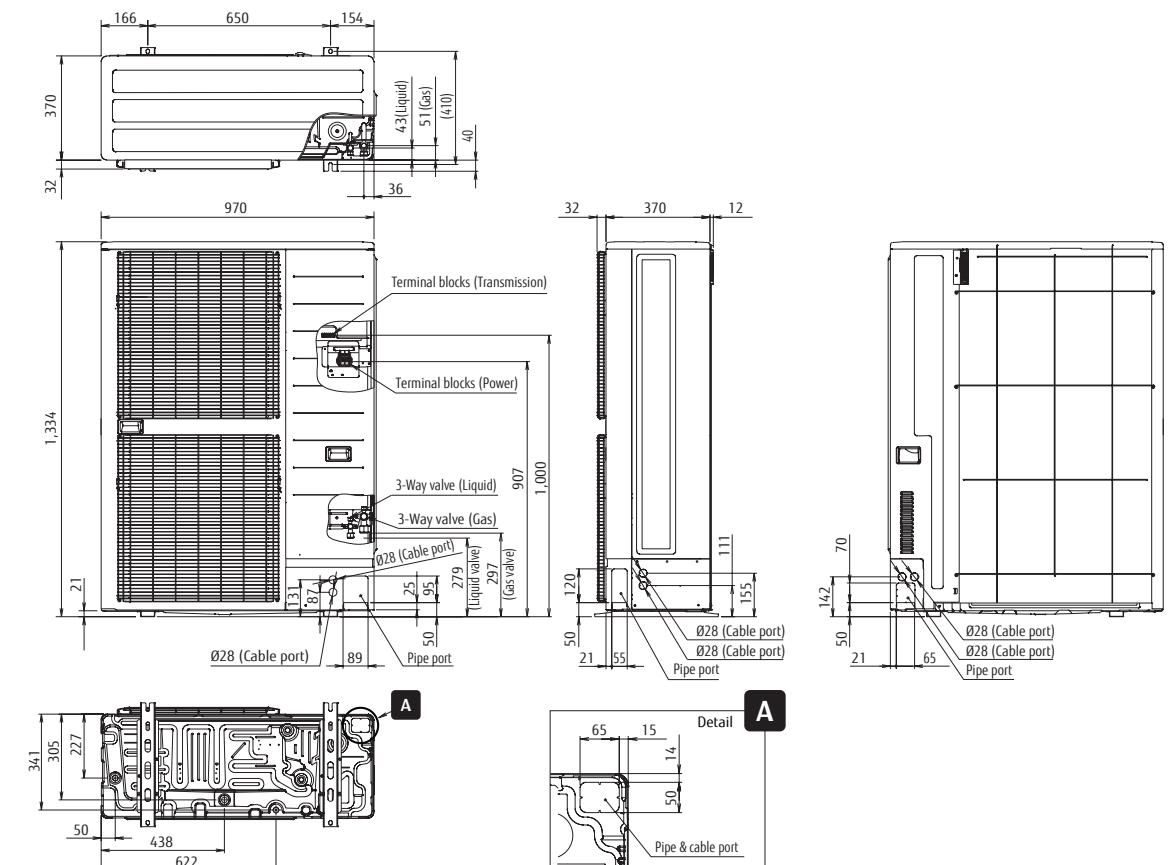



Cooling Only type


NEW VRF **VC-V**

Smart and cutting edge design  
Extensive lineup from 8HP to 80HP in 2HP increment  
Connectable indoor unit capacity ratio up to 150%

System Outline

System configuration example

- This system is used for medium-sized and large buildings. Connecting each outdoor unit makes it possible to create a high capacity system.
- Connection of multiple indoor units using separation tubes and headers.

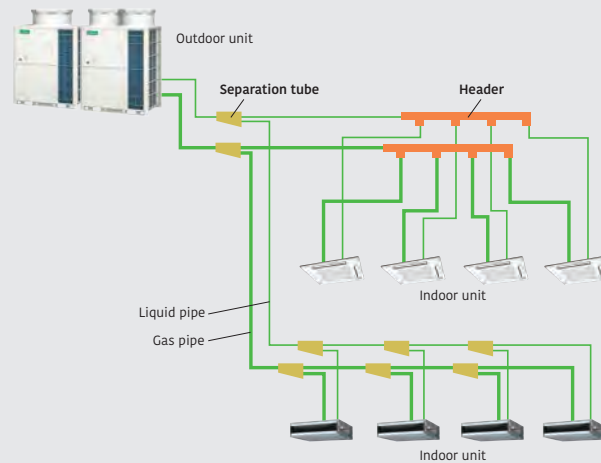

Features

From City to Oasis  
And to the Future of the Earth



Air conditioning up to 80 HP with one refrigerant system

New series **51 systems**

More Wide lineup

HP	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80	
Standard combination	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Energy Efficiency					●	●	●		●	●	●	●	●	●	●	●	●	●	●																			


Space saving and compact size

Compact size has been achieved by significantly reducing the chassis of the outdoor units compared to previous models.



Contributes to reduction of project costs

Up to 80 HP can be selected for a single refrigerant system. This reduces the number of outdoor units and materials required for installation (piping, power lines, communication lines, racking, breakers, conduit, etc.) compared to conventional products. This product is expected to reduce project costs.

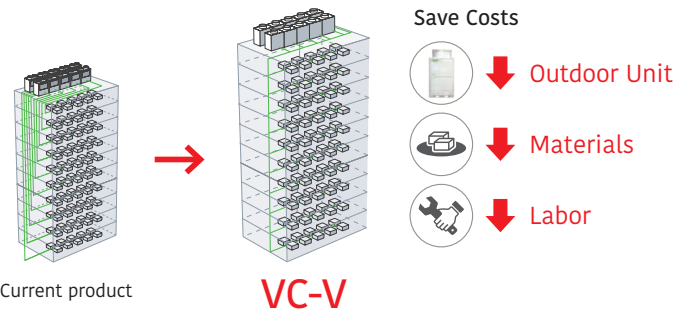




Reduces the number of systems and installation area

Since the installation area can be reduced, the reduced space can be used for other purposes.  
For example, the area can be used as a biotope to contribute to a sustainable future by greening it.


\*Comparison of multiple 80 HP systems installed, for example

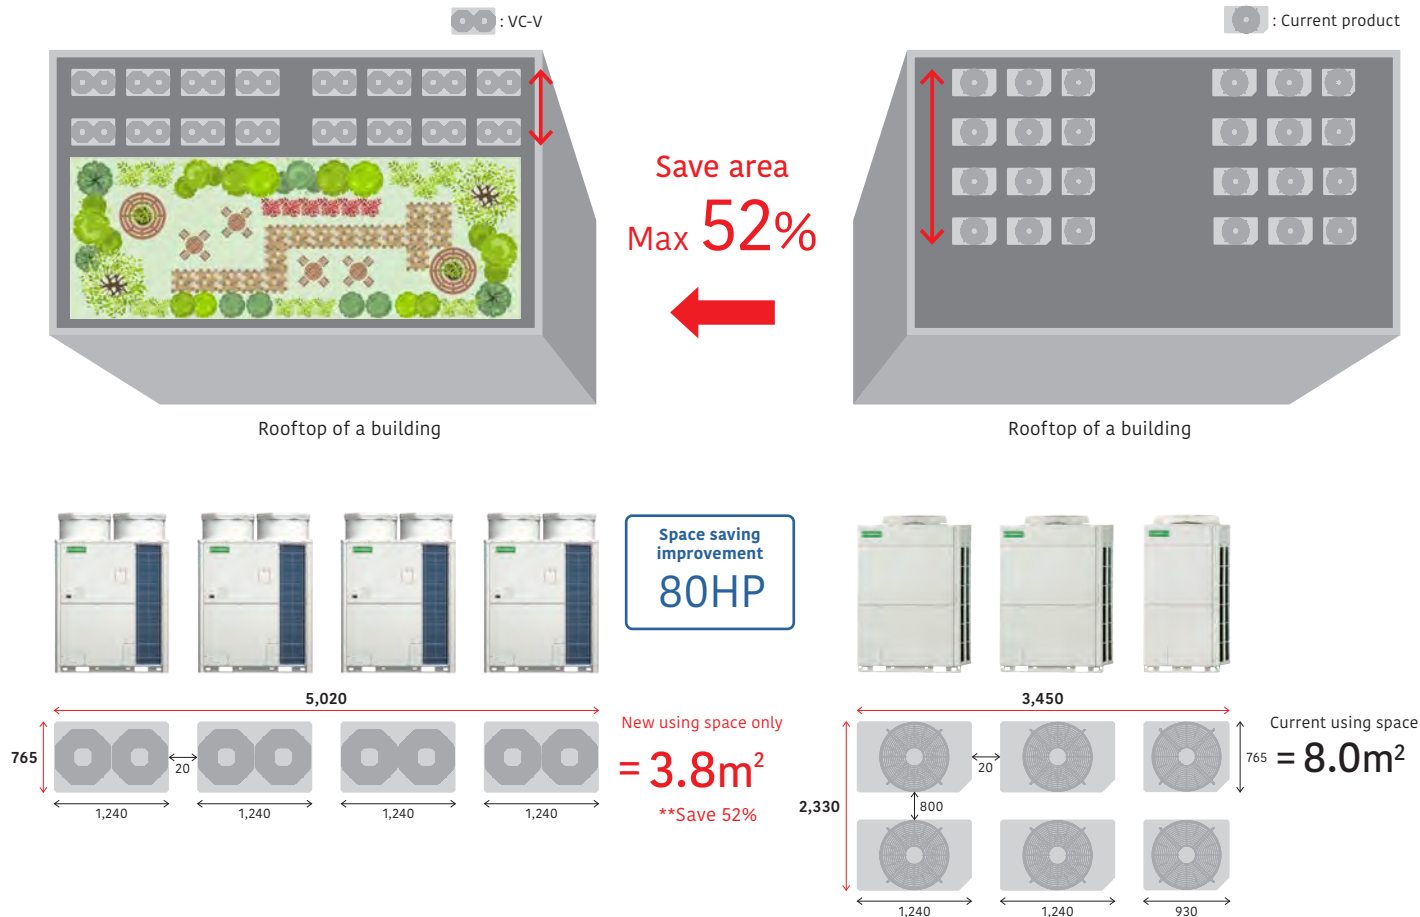


High Energy Efficiency

Class-leading high EER (Maximum) The use of our proprietary heat exchanger structure and high-efficiency Scroll compressors achieves the class-leading coefficient of performance (EER) in every combination.

Energy Efficiency Combinations

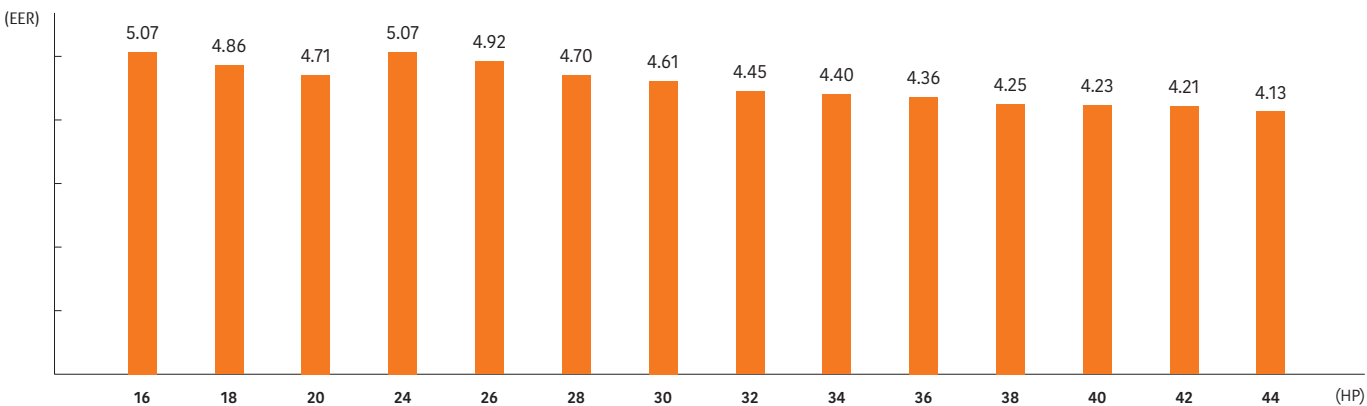


Energy saving technology that boosted operation efficiency

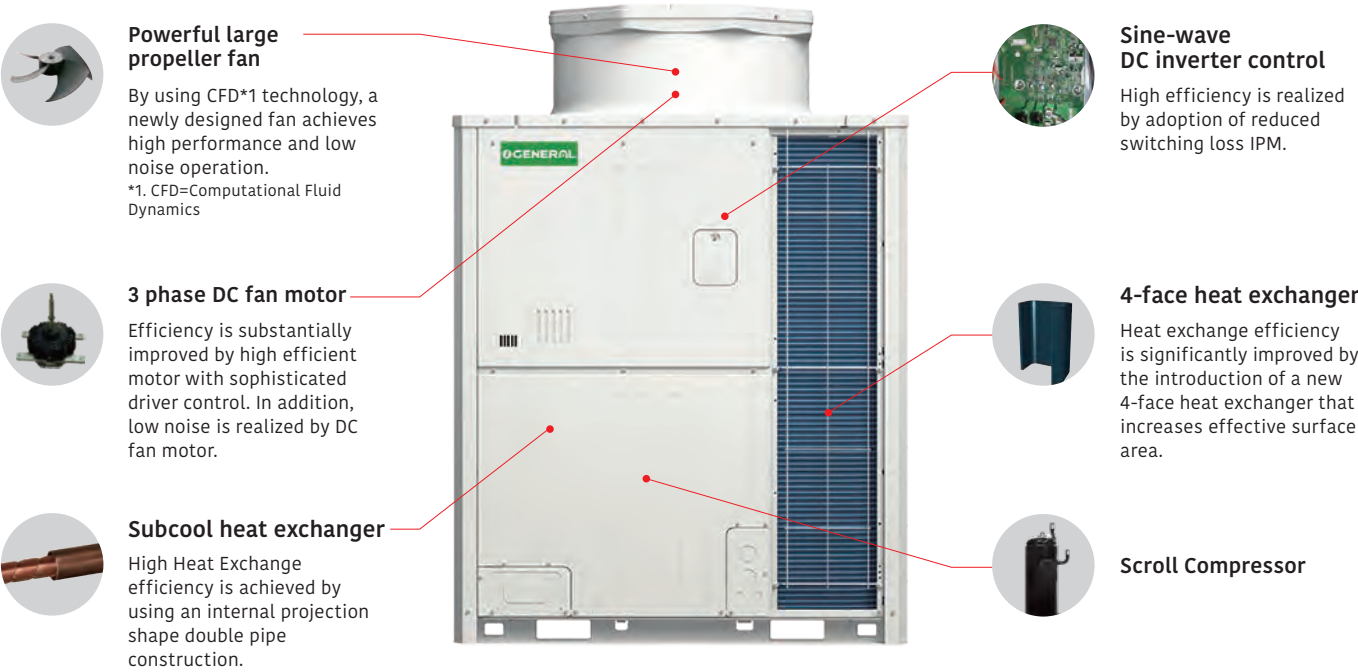


High Performance Scroll Compressor

The combination of a scroll compressor and our proprietary sensorless sine-wave control that smoothly controls the input power into the motor can achieve a wider rotational frequency range from 15 to 120 rps, resulting in energy-efficient and quieter operation.

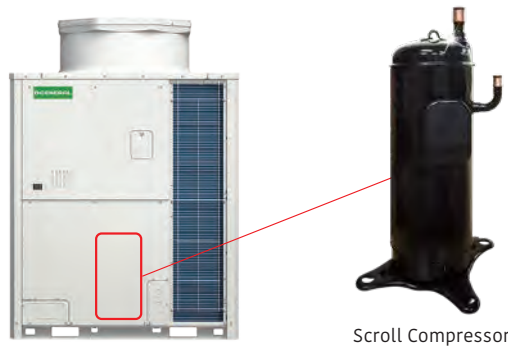

Intelligent Refrigerant Control

Fujitsu General is proposing outdoor units equipped with refrigerant control function. The refrigerant control operates with suitable control corresponding to the heat load of the room and offers a more comfortable environment. The refrigerant control can also provide increased energy savings.

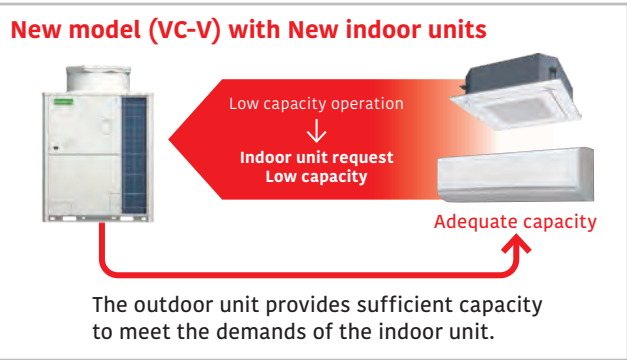

\* The improvements due to the control and the actual sine wave vary depending on the combination of the indoor unit and system operating conditions.



High Reliability

PCB Protection  
– Low-High voltage support

Even if the product is installed in an area where the power supply (voltage) is not stable, the PCB that controls the product is protected, so the product can be installed with peace of mind.  
For example, even if the system goes down due to factors such as lightning strikes, the system will operate at its original operational content when the power is restored, making management easy.

- ✔ Not damaged
- ✔ Protected






- ✔ Not damaged
- ✔ Protected
- ✔ Can auto recovery




Protects against power supply mis-wiring

Even if there is a mistake in the wiring connection during the "reverse phase," "phase loss," or "missing phase" of the power connection during installation, the product will not be damaged and can be installed with peace of mind.

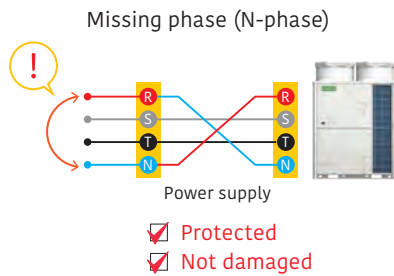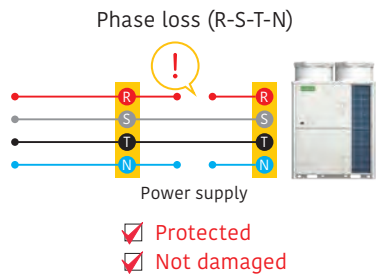
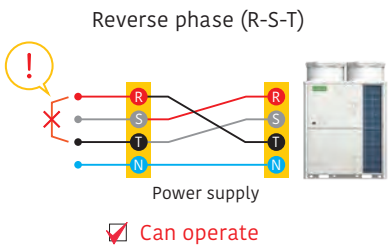


New refrigerant cooling technology

New Refrigerant Cooling Technology, ensures the stability of PCB temperature and improves reliability at high ambient temperatures.  
It's possible to cool the inverter power module stability even at high ambient temperatures.  
This helps to keep air conditioner capacity and also ensures efficient and reliable operation.

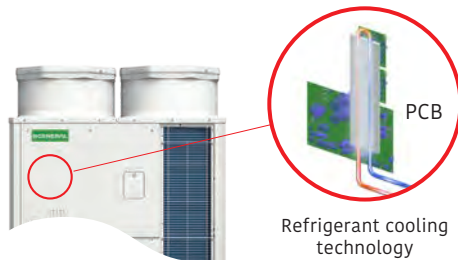


Anti-corrosion

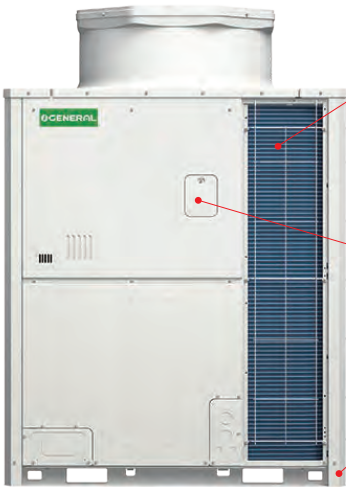

Bluefin heat exchanger

Blue fin treatment of the condenser offers improved corrosion resistance and longer life of the heat exchanger. Adoption blue coating for the fins in the heat exchanger provides protection against rust and salt damage.



Silicon coated PCB

High-ambient-temperature-compatible electronic components are used. Silicon coating is applied to all PCB circuits for corrosion protection.




High corrosion screw

Zinc-chrome-acid film treatment applied to all screws.

Hydrophilic coating  
Aluminium base materials  
Cobalt Blue protection

Wide operating range


Designed to perform at ambient conditioners as high as 55 °C. Installation in extreme temperature conditions is possible due to an increased operational range.

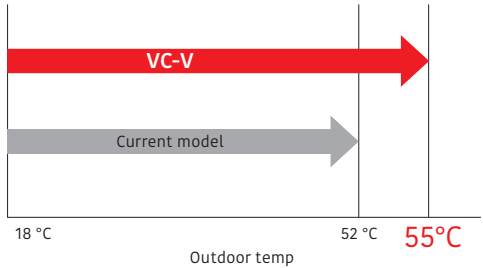

Design for easy service and maintenance


Service space

New design for easy maintenance and service space design without moving control box in order to maintenance

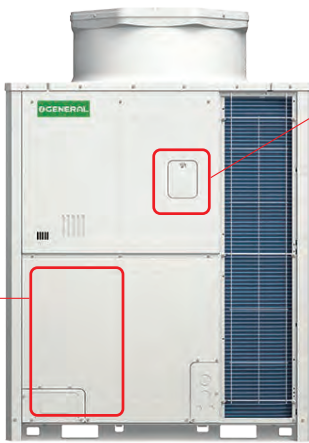

Access panel

Comes with an access panel that allows you to access 7 segments and push buttons without removing the panel.




The split service panel allows for maintenance from the top or bottom of the outdoor unit.

\*The bottom panel can not be removed without removing the top panel.

Automatic address setting


The address of the indoor unit and signal amplifier can be set through the automatic function setting on the outdoor unit PCB.

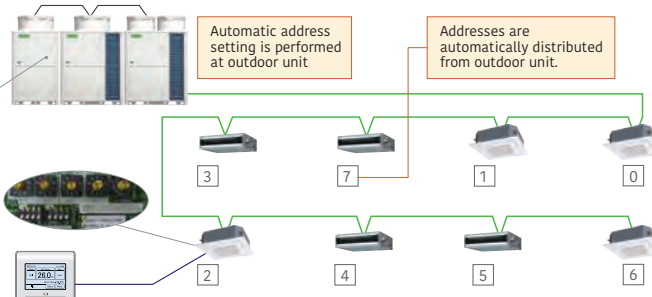

Manual address setting from indoor unit and remote controller is also possible.

Various combinations

Various combination from 8HP to 80HP increments. 15 type, 147 models of indoor units can be selected ranging from 2.2kW to 28kW in capacity. A maximum of 150% indoor unit connectable capacity.

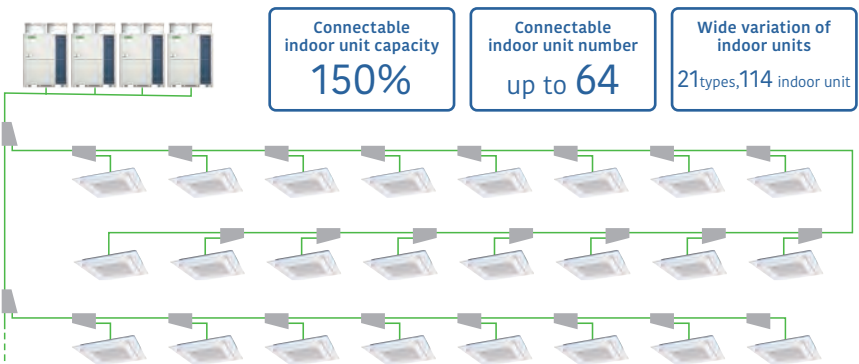








































Outdoor units lineup















• Combinations other than the followings are not recommended.

VC-V

Standard combination

22.4kW (8HP)  AJG072JNTAH-U UNIT : AJG072JNTAH-U	28.0kW (10HP)  AJG090JNTAH-U UNIT : AJG090JNTAH-U	33.5kW (12HP)  AJG108JNTAH-U UNIT : AJG108JNTAH-U	40.0kW (14HP)  AJG126JNTAH-U UNIT : AJG126JNTAH-U	45.0kW (16HP)  AJG144JNTAH-U UNIT : AJG144JNTAH-U	50.0 kW (18HP)  AJG162JNTAH-U UNIT : AJG162JNTAH-U
56.0 kW (20HP)  AJG180JNTAH-U UNIT : AJG180JNTAH-U	61.5 kW (22HP)  AJG198JNTAH-U UNIT : AJG108/090JNTAH-U	67.0 kW (24HP)  AJG216JNTAH-U UNIT : AJG108/108JNTAH-U	73.5 kW (26HP)  AJG234JNTAH-U UNIT : AJG126/108JNTAH-U	78.5 kW (28HP)  AJG252JNTAH-U UNIT : AJG144/108JNTAH-U	83.5 kW (30HP)  AJG270JNTAH-U UNIT : AJG162/108JNTAH-U
90.0 kW (32HP)  AJG288JNTAH-U UNIT : AJG144/144JNTAH-U	95.0 kW (34HP)  AJG306JNTAH-U UNIT : AJG162/144JNTAH-U	100.0 kW (36HP)  AJG324JNTAH-U UNIT : AJG162/162JNTAH-U	106.0 kW (38HP)  AJG342JNTAH-U UNIT : AJG180/162JNTAH-U	112.0 kW (40HP)  AJG360JNTAH-U UNIT : AJG180/180JNTAH-U	117.0 kW (42HP)  AJG378JNTAH-U UNIT : AJG162/108/108JNTAH-U
123.0 kW (44HP)  AJG396JNTAH-U UNIT : AJG180/108/108JNTAH-U	130.0 kW (46HP)  AJG414JNTAH-U UNIT : AJG162/126/126JNTAH-U	135.0 kW (48HP)  AJG432JNTAH-U UNIT : AJG162/144/126JNTAH-U	140.0 kW (50HP)  AJG450JNTAH-U UNIT : AJG162/162/126JNTAH-U	145.0 kW (52HP)  AJG468JNTAH-U UNIT : AJG162/162/144JNTAH-U	150.0 kW (54HP)  AJG486JNTAH-U UNIT : AJG162/162/162JNTAH-U
156.0 kW (56HP)  AJG504JNTAH-U UNIT : AJG180/162/162JNTAH-U	162.0 kW (58HP)  AJG522JNTAH-U UNIT : AJG180/180/162JNTAH-U	168.0 kW (60HP)  AJG540JNTAH-U UNIT : AJG180/180/180JNTAH-U	173.0 kW (62HP)  AJG558JNTAH-U UNIT : AJG180/162/108/108JNTAH-U	179.0 kW (64HP)  AJG576JNTAH-U UNIT : AJG180/180/108/108JNTAH-U	183.5 kW (66HP)  AJG594JNTAH-U UNIT : AJG162/162/162/108JNTAH-U
189.5 kW (68HP)  AJG612JNTAH-U UNIT : AJG180/162/162/108JNTAH-U	195.5 kW (70HP)  AJG630JNTAH-U UNIT : AJG180/180/162/108JNTAH-U	201.5 kW (72HP)  AJG648JNTAH-U UNIT : AJG180/180/180/108JNTAH-U	206.0 kW (74HP)  AJG666JNTAH-U UNIT : AJG180/162/162/162JNTAH-U	212.0 kW (76HP)  AJG684JNTAH-U UNIT : AJG180/180/162/162JNTAH-U	218.0 kW (78HP)  AJG702JNTAH-U UNIT : AJG180/180/180/162JNTAH-U
224.0 kW (80HP)  AJG720JNTAH-U UNIT : AJG180/180/180/180JNTAH-U					


Energy efficiency combinations

44.8 kW (16HP)  AJG144JNTAHH-U UNIT : AJG072/072JNTAH-U	50.4 kW (18HP)  AJG162JNTAHH-U UNIT : AJG090/072JNTAH-U	56.0 kW (20HP)  AJG180JNTAHH-U UNIT : AJG090/090JNTAH-U	67.2 kW (24HP)  AJG216JNTAHH-U UNIT : AJG072/072/072JNTAH-U	72.8 kW (26HP)  AJG234JNTAHH-U UNIT : AJG090/072/072JNTAH-U	78.3 kW (28HP)  AJG252JNTAHH-U UNIT : AJG108/072/072JNTAH-U
83.9 kW (30HP)  AJG270JNTAHH-U UNIT : AJG108/090/072JNTAH-U	89.4 kW (32HP)  AJG288JNTAHH-U UNIT : AJG108/108/072JNTAH-U	95.0 kW (34HP)  AJG306JNTAHH-U UNIT : AJG108/108/090JNTAH-U	101.5 kW (36HP)  AJG324JNTAHH-U UNIT : AJG126/108/090JNTAH-U	107.0 kW (38HP)  AJG342JNTAHH-U UNIT : AJG126/108/108JNTAH-U	113.5 kW (40HP)  AJG360JNTAHH-U UNIT : AJG126/126/108JNTAH-U
120.0 kW (42HP)  AJG378JNTAHH-U UNIT : AJG126/126/126JNTAH-U	125.0 kW (44HP)  AJG396JNTAHH-U UNIT : AJG144/126/126JNTAH-U				


Dimensions

8,10,12HP : AJG072JNTAH-U / AJG090JNTAH-U / AJG108JNTAH-U





(Unit : mm)

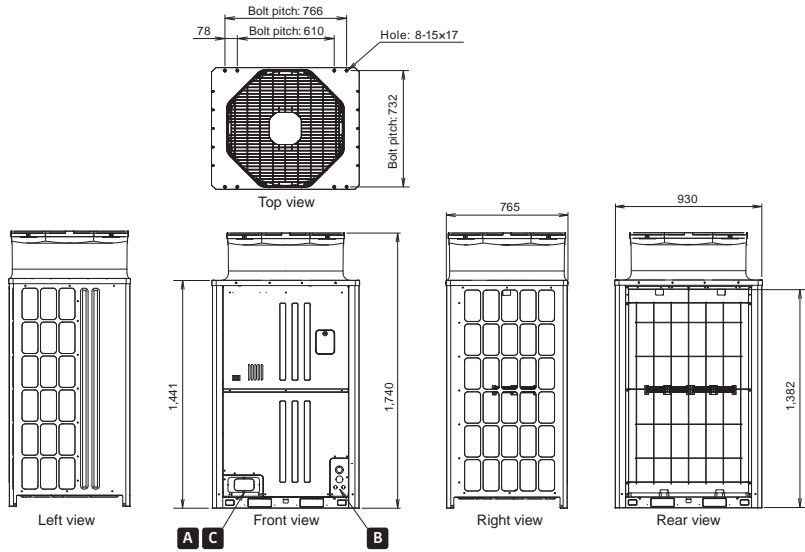

14,16HP : AJG126JNTAH-U / AJG144JNTAH-U

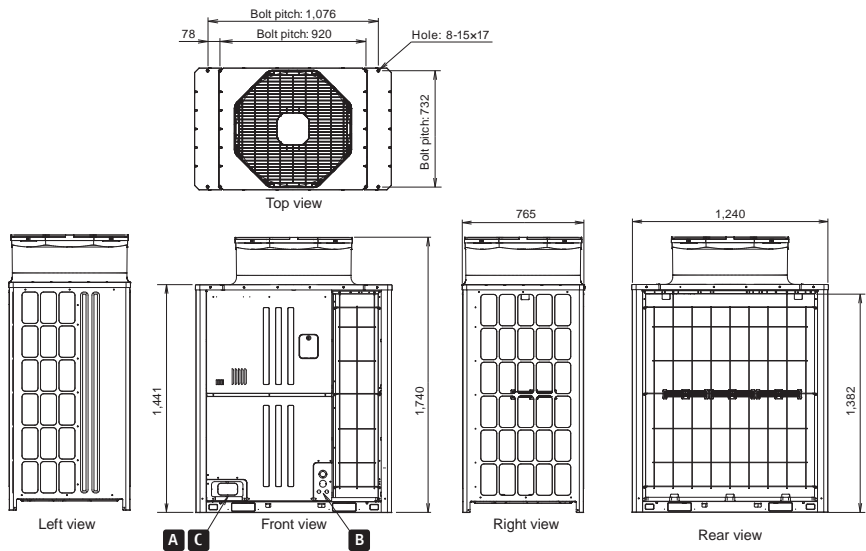



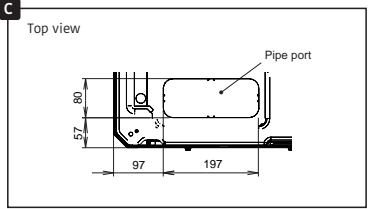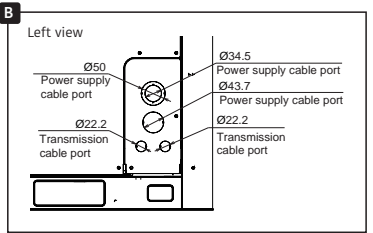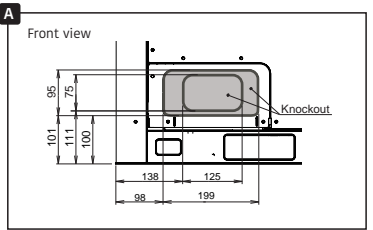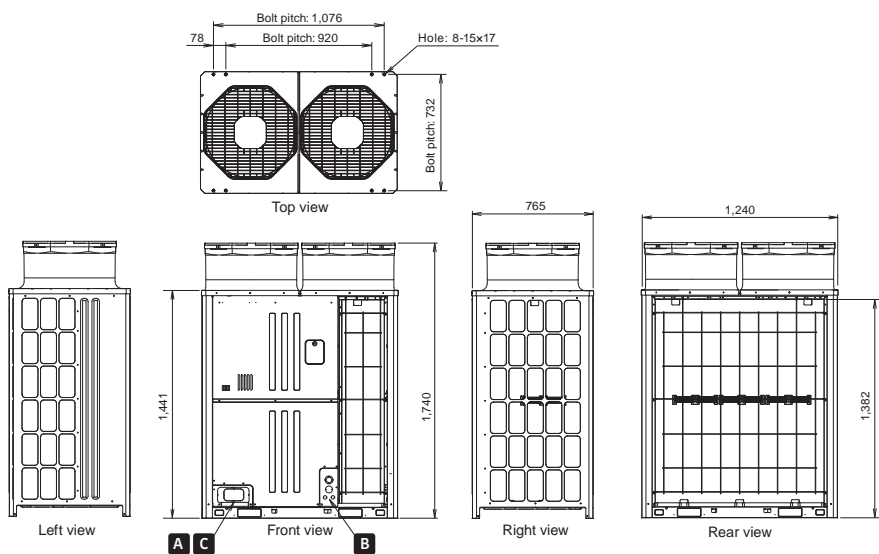























18,20HP : AJG162JNTAH-U / AJG180JNTAH-U











Standard combination

Rating Capacity range			HP	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44							
			Btu/hr	72,000	90,000	108,000	126,000	144,000	162,000	180,000	198,000	216,000	234,000	252,000	270,000	288,000	306,000	324,000	342,000	360,000	378,000	396,000							
			Ton	6	7.5	9	10.5	12	13.5	15	16.5	18	19.5	21	22.5	24	25.5	27	28.5	30	31.5	33							
																													
Model name			AJG072JNTAH-U	AJG090JNTAH-U	AJG108JNTAH-U	AJG126JNTAH-U	AJG144JNTAH-U	AJG162JNTAH-U	AJG180JNTAH-U	AJG198JNTAH-U	AJG216JNTAH-U	AJG234JNTAH-U	AJG252JNTAH-U	AJG270JNTAH-U	AJG288JNTAH-U	AJG306JNTAH-U	AJG324JNTAH-U	AJG342JNTAH-U	AJG360JNTAH-U	AJG378JNTAH-U	AJG396JNTAH-U								
Unit 1 Unit 2 Unit 3			AJG072JNTAH-U	AJG090JNTAH-U	AJG108JNTAH-U	AJG126JNTAH-U	AJG144JNTAH-U	AJG162JNTAH-U	AJG180JNTAH-U	AJG108JNTAH-U AJG090JNTAH-U	AJG108JNTAH-U AJG108JNTAH-U	AJG126JNTAH-U AJG108JNTAH-U	AJG144JNTAH-U AJG108JNTAH-U	AJG162JNTAH-U AJG108JNTAH-U	AJG144JNTAH-U AJG144JNTAH-U	AJG162JNTAH-U AJG144JNTAH-U	AJG162JNTAH-U AJG162JNTAH-U	AJG180JNTAH-U AJG162JNTAH-U	AJG180JNTAH-U AJG180JNTAH-U	AJG162JNTAH-U AJG108JNTAH-U	AJG162JNTAH-U AJG108JNTAH-U								
Maximum Connectable Indoor Unit			15	19	22	27	30	34	38	41	45	50	53	56	61	64	64	64	64	64	64								
Indoor unit connectable capacity			kW	11.2 - 33.6	14.0 - 42.0	16.8 - 50.3	20.0 - 60.0	22.5 - 67.5	25.0 - 75.0	28.0 - 84.0	30.8 - 92.2	33.5 - 100.5	36.8 - 110.2	39.3 - 117.7	41.8 - 125.2	45.0 - 135.0	47.5 - 142.5	50.0 - 150.0	53.0 - 159.0	56.0 - 168.0	58.5 - 175.5	61.5 - 184.5							
Power source			3N ~ 380~415 V, 50 Hz / 3N ~ 400 V, 60 Hz																		3N ~ 380~415 V, 50 Hz / 3N ~ 400 V, 60 Hz								
Capacity	Cooling(T1)	kW	22.4	28.0	33.5	40.0	45.0	50.0	56.0	61.5	67.0	73.5	78.5	83.5	90.0	95.0	100.0	106.0	112.0	117.0	123.0								
		Btu/h	76,400	95,500	114,300	136,500	153,500	170,600	191,100	209,800	228,600	250,800	267,800	284,900	307,000	324,100	341,200	361,700	382,200	399,200	419,700								
	Cooling(T3)	kW	22.4	28.0	32.4	36.5	39.5	42.8	46.1	48.8	51.5	54.2	56.9	59.6	62.3	65.0	67.7	70.4	73.1	75.8	78.5								
Input power (Outdoor unit)			Cooling(T3)	kW	6.64	8.42	10.77	11.18	12.25	13.56	14.97	16.38	17.79	19.20	20.61	22.02	23.43	24.84	26.25	27.66	29.07	30.48							
Current (Outdoor Unit)			Cooling(T3)	A	10.6	13.3	16.9	17.8	19.4	21.3	23.2	25.1	27.0	28.9	30.8	32.7	34.6	36.5	38.4	40.3	42.2	44.1							
Power factor (Outdoor unit)				0.9	0.9	0.9	0.9	0.9	0.9	0.9	-	-	-	-	-	-	-	-	-	-	-								
EER (Outdoor Unit)			Cooling(T1)	W/W	5.07	4.71	4.28	4.21	4.11	3.72	3.22	4.46	4.28	4.24	4.18	3.92	4.11	3.89	3.72	3.44	3.22	4.02	3.72						
EER (System)			Cooling(T3)	W/W	3.30	3.25	2.94	3.18	3.14	3.08	2.82	3.08	2.94	3.07	3.05	3.02	3.14	3.11	3.08	2.94	2.82	3.00	2.89						
CSPF				Btu/hW	11.26	11.09	10.03	10.71	10.51	9.62	10.03	10.48	10.41	10.30	10.71	10.61	10.51	10.30	10.03	9.62	10.24	9.86							
Air flow rate			m³/h	10,200	10,200	10,200	13,700	13,700	15,500	16,800	10,200 × 2	10,200 + 13,700	10,200 + 13,700	10,200 + 15,500	13,700 × 2	13,700 + 15,500	15,500 × 2	15,500 + 16,800	16,800 × 2	10,200 × 2 + 15,500	10,200 × 2 + 16,800								
Sound pressure level*1			Cooling	dB(A)	55	55	56	62	63	64	59	64	65	66	66	67	67	69	70	65	68								
External static pressure (Max)				Pa	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82								
Compressor motor output				kW	4.7	4.7	4.7	4.7	4.7	6.2	4.7 × 2	4.7 × 2	4.7 × 2	4.7 × 2	4.7 × 2	4.7 × 2	4.7 × 2	6.2 × 2	6.2 × 2	4.7 × 2 + 6.2	4.7 × 2 + 6.2								
Heat exchanger fin				Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin								
Dimensions	Height	mm		1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740								
			Width	930	930	930	1,240	1,240	1,240	1,240	930 × 2	930 × 2	930 + 1,240	930 + 1,240	930 + 1,240	1,240 × 2	1,240 × 2	1,240 × 2	1,240 × 2	1,240 × 2	930 × 2 + 1,240	930 × 2 + 1,240							
	Depth			765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765								
Weight			kg	210	210	210	234	234	257	257	210 × 2	210 × 2	210 + 234	210 + 234	210 + 257	234 × 2	234 + 257	257 × 2	257 × 2	210 × 2 + 257	210 × 2 + 257								
Refrigerant	Type			R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A								
	Factory charged amount		kg	9.7	9.7	9.7	11.8	11.8	11.8	11.8	9.7 × 2	9.7 × 2	9.7 + 11.8	9.7 + 11.8	9.7 + 11.8	11.8 × 2	11.8 × 2	11.8 × 2	11.8 × 2	9.7 × 2 + 11.8	9.7 × 2 + 11.8								
Connection pipe diameter			Liquid	mm	9.52	9.52	12.70	12.70	15.88	15.88	15.88	15.88	15.88	15.88	19.05	19.05	19.05	19.05	19.05	19.05	19.05								
			Gas		19.05	22.22	28.58	28.58	28.58	28.58	28.58	34.92	34.92	34.92	34.92	34.92	41.27	41.27	41.27	41.27	41.27								
Operating range			Cooling	*CDB	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55								

Rating Capacity range			HP	46	48	50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80																																			
			Btu/hr	414,000	432,000	450,000	468,000	486,000	504,000	522,000	540,000		588,000	576,000	594,000	612,000	630,000	648,000	666,000	684,000	702,000	720,000																																		
			Ton	34.5	36	37.5	39	40.5	42.0	44	45		49	48.0	50	51	52.5	54	55.5	57	58.5	60																																		
																																																								
Model name			AJG414JNTAH-U	AJG432JNTAH-U	AJG450JNTAH-U	AJG468JNTAH-U	AJG486JNTAH-U	AJG504JNTAH-U	AJG522JNTAH-U	AJG540JNTAH-U	AJG558JNTAH-U	AJG576JNTAH-U	AJG594JNTAH-U	AJG612JNTAH-U	AJG630JNTAH-U	AJG648JNTAH-U	AJG666JNTAH-U	AJG684JNTAH-U	AJG702JNTAH-U	AJG720JNTAH-U																																				
Unit 1 Unit 2 Unit 3			AJG162JNTAH-U AJG126JNTAH-U AJG126JNTAH-U	AJG162JNTAH-U AJG144JNTAH-U AJG126JNTAH-U	AJG162JNTAH-U AJG162JNTAH-U AJG126JNTAH-U	AJG162JNTAH-U AJG162JNTAH-U AJG144JNTAH-U	AJG162JNTAH-U AJG162JNTAH-U AJG162JNTAH-U	AJG180JNTAH-U AJG162JNTAH-U AJG162JNTAH-U	AJG180JNTAH-U AJG180JNTAH-U AJG162JNTAH-U	AJG180JNTAH-U AJG180JNTAH-U AJG180JNTAH-U	AJG180JNTAH-U AJG162JNTAH-U AJG108JNTAH-U	AJG180JNTAH-U AJG180JNTAH-U AJG108JNTAH-U	AJG162JNTAH-U AJG162JNTAH-U AJG108JNTAH-U	AJG180JNTAH-U AJG162JNTAH-U AJG108JNTAH-U	AJG180JNTAH-U AJG180JNTAH-U AJG162JNTAH-U	AJG180JNTAH-U AJG180JNTAH-U AJG108JNTAH-U	AJG180JNTAH-U AJG162JNTAH-U AJG108JNTAH-U	AJG180JNTAH-U AJG162JNTAH-U AJG108JNTAH-U	AJG180JNTAH-U AJG180JNTAH-U AJG162JNTAH-U	AJG180JNTAH-U AJG180JNTAH-U AJG162JNTAH-U																																				
Maximum Connectable Indoor Unit			64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64	64																																				
Indoor unit connectable capacity			kW	65.0 - 195.0	67.5 - 202.5	70.0 - 210.0	72.5 - 217.5	75.0 - 225.0	78.0 - 234.0	81.0 - 243.0	84.0 - 252.0	86.5 - 259.5	89.5 - 268.5	91.8 - 275.2	94.8 - 284.2	97.8 - 293.2	100.8 - 302.2	103.0 - 309.0	106.0 - 318.0	109.0 - 327.0	112.0 - 336.0																																			
Power source			3N ~ 380~415 V, 50 Hz / 3N ~ 400 V, 60 Hz																		3N ~ 380~415 V, 50 Hz / 3N ~ 400 V, 60 Hz																																			
Capacity	Cooling(T1)	kW	130.0	135.0	140.0	145.0	150.0	156.0	162.0	168.0	173.0	179.0	183.5	189.5	195.5	201.5	206.0	212.0	218.0	224.0																																				
		Btu/h	443,600	460,600	477,700	494,700	511,800	532,300	552,800	573,300	590,300	610,800	626,100	646,600	667,100	687,600	702,900	723,400	743,900	764,400																																				
	Cooling(T3)	kW	115.8	118.8	122.1	125.1	128.4	131.7	135.0	138.3	153.7	157.0	160.8	164.1	167.4	170.7	174.5	177.8	181.1	184.4																																				
Input power (Outdoor unit)			Cooling(T3)	kW	35.92	36.99	38.30	39.37	40.68	43.15	45.62	48.09	51.13	53.60	54.45	53.92	56.39	58.86	56.71	59.18	61.65																																			
Current (Outdoor Unit)			Cooling(T3)	A	56.9	58.5	60.4	62.0	63.9	67.6	71.3	75.0	80.1	83.8	80.8	84.5	88.2	91.9	88.9	92.6	96.3																																			
Power factor (Outdoor unit)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-																																				
EER (Outdoor Unit)	Cooling(T1)	W/W	4.01	3.98	3.85	3.83	3.72	3.52	3.36	3.22	3.72	3.55	3.81	3.64	3.49	3.36	3.57	3.44	3.32	3.22																																				
EER (System)			Cooling(T3)	W/W	3.15	3.13	3.11	3.10	2.99	2.90	2.82	2.94	2.87	3.05	2.98	2.91	2.84	2.98	2.88	2.82																																				
CSFP			Btu/hW	10.75	10.68	10.61	10.58	10.51	10.20	9.90	9.62	10.03	9.79	10.41	10.17	9.93	9.69	10.27	10.03	9.83																																				
Air flow rate			m³/h	13,700 × 2 + 15,500	13,700 × 2 + 15,500	13,700 + 15,500 × 2	13,700 + 15,500 × 2	15,500 × 3	15,500 × 2 + 16,800	15,500 +16,800 × 2	16,800 × 3	10,200 × 2 + 15,500 + 16,800	10,200 × 2 + 16,800 × 2	10,200 + 15,500 × 3	10,200 + 15,500 × 2 + 16,800	10,200 + 15,500 + 16,800 × 2	10,200 + 16,800 × 3	15,500 × 3 + 16,800	15,500 × 2 + 16,800 × 2	15,500 + 16,800 × 3	16,800 × 4																																			
Sound pressure level*1	Cooling	dB(A)	68	68	68	68	69	70	71	72	72	69	70	69	70	71	72	71	72	73																																				
External static pressure (Max)			Pa	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82																																			
Compressor motor output			kW	4.7 × 2 + 6.2	4.7 × 2 + 6.2	4.7 + 6.2 × 2	4.7 + 6.2 × 2	6.2 × 3	6.2 × 3	6.2 × 3	6.2 × 3	4.7 × 2 + 6.2 × 2	4.7 × 2 + 6.2 × 2	4.7 + 6.2 × 3	4.7 + 6.2 × 3	4.7 + 6.2 × 3	6.2 × 4	6.2 × 4	6.2 × 4	6.2 × 4																																				
Heat exchanger fin			Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin																																				
Dimensions	Height	mm	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740																																				
	Width		1240 × 3	1240 × 3	1240 × 3	1240 × 3	1240 × 3	1240 × 3	1240 × 3	1240 × 3	1240 × 3	1240 × 3	930 × 2 + 1,240 × 2	930 × 2 + 1,240 × 2	930 + 1,240 × 3	930 + 1,240 × 3	930 + 1,240 × 3	930 + 1,240 × 3	1,240 × 4	1,240 × 4	1,240 × 4																																			
	Depth		765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765																																			
Weight			kg	234 × 2 + 257	234 × 2 + 257	234 + 257 × 2	234 + 257 × 2	257 × 3	257 × 3	257 × 3	257 × 3	210 × 2 + 257 × 2	210 × 2 + 257 × 2	210 + 257 × 3	210 + 257 × 3	210 + 257 × 3	210 + 257 × 3	257 × 4	257 × 4	257 × 4	257 × 4																																			
Refrigerant	Type	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A																																				
	Factory charged amount	kg	11.8 × 3	11.8 × 3	11.8 × 3	11.8 × 3	11.8 × 3	11.8 × 3	11.8 × 3	11.8 × 3	9.7 × 2 + 11.8 × 2	9.7 × 2 + 11.8 × 2	9.7 + 11.8 × 3	9.7 + 11.8 × 3	9.7 + 11.8 × 3	9.7 + 11.8 × 3	11.8 × 4	11.8 × 4	11.8 × 4	11.8 × 4																																				
Connection pipe diameter			Liquid	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	22.22	22.22	22.22	22.22																																				
			Gas	41.27	41.27	41.27	41.27	41.27	41.27	41.27	41.27	41.27	41.27	41.27	41.27	41.27	41.27	41.27	41.27	41.27																																				
Operating range			Cooling	*CDB	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55																																				



Energy Efficiency Combinations

Rating Capacity range			HP	16	18	20	24	26	28	30	32	34	36	38	40	42	44															
			Btu/hr	144,000	162,000	180,000	216,000	234,000	252,000	270,000	288,000	306,000	324,000	342,000	360,000	378,000	396,000															
			Ton	12	13.5	15	18	19.5	21	22.5	24	25.5	27	28.5	30	31.5	33															
																																
Model name			AJG144JNTAHH-U		AJG162JNTAHH-U		AJG180JNTAHH-U		AJG216JNTAHH-U		AJG234JNTAHH-U		AJG252JNTAHH-U		AJG270JNTAHH-U		AJG288JNTAHH-U		AJG306JNTAHH-U		AJG324JNTAHH-U		AJG342JNTAHH-U		AJG360JNTAHH-U		AJG378JNTAHH-U		AJG396JNTAHH-U			
Unit 1 Unit 2 Unit 3			AJG072JNTAH-U AJG072JNTAH-U		AJG090JNTAH-U AJG072JNTAH-U		AJG090JNTAH-U AJG090JNTAH-U		AJG072JNTAH-U AJG072JNTAH-U AJG072JNTAH-U		AJG090JNTAH-U AJG072JNTAH-U AJG072JNTAH-U		AJG108JNTAH-U AJG108JNTAH-U AJG072JNTAH-U		AJG108JNTAH-U AJG108JNTAH-U AJG072JNTAH-U		AJG108JNTAH-U AJG108JNTAH-U AJG090JNTAH-U		AJG126JNTAH-U AJG126JNTAH-U AJG090JNTAH-U		AJG126JNTAH-U AJG126JNTAH-U AJG108JNTAH-U		AJG126JNTAH-U AJG126JNTAH-U AJG108JNTAH-U		AJG126JNTAH-U AJG126JNTAH-U AJG126JNTAH-U		AJG144JNTAH-U AJG126JNTAH-U AJG126JNTAH-U					
Maximum Connectable Indoor Unit			30		34		38		45		49		53		57		60		64		64		64		64		64		64			
Indoor unit connectable capacity		kW	22.4 - 67.2		25.2 - 75.6		28.0 - 84.0		33.6 - 100.8		36.4 - 109.2		39.2 - 117.4		42.0 - 125.8		44.7 - 134.1		47.5 - 142.5		50.8 - 152.2		53.5 - 160.5		56.8 - 170.2		60.0 - 180.0		62.5 - 187.5			
Power source			3N ~ 380~415 V, 50 Hz / 3N ~ 400 V, 60 Hz															3N ~ 380~415 V, 50 Hz / 3N ~ 400 V, 60 Hz														
Capacity	Cooling(T1)	kW	44.8	50.4	56.0	67.2	72.8	78.3	83.9	89.4	95.0	101.5	107.0	113.5	120.0	125.0																
		Btu/h	152,800	171,900	191,000	229,200	248,300	267,100	286,200	305,000	324,100	346,300	365,100	387,300	409,500	426,500																
	Cooling(T3)	kW	44.8	50.4	56.0	67.2	72.8	77.2	82.8	87.2	92.8	96.9	101.3	105.4	109.5	112.5																
		Btu/h	152,800	171,900	191,000	229,200	248,300	263,300	282,400	297,400	316,500	330,500	345,500	359,500	373,500	383,700																
Input power (Outdoor unit)	Cooling(T3)	kW	13.28	15.06	16.84	19.92	21.70	24.05	25.83	28.18	29.96	30.37	32.72	33.13	33.54	34.61																
Current (Outdoor Unit)	Cooling(T3)	A	21.2	23.9	26.6	31.8	34.5	38.1	40.8	44.4	47.1	48.0	51.6	52.5	53.4	55.0																
Power factor (Outdoor unit)			-																													
EER (Outdoor Unit)	Cooling(T3)	W/W	5.07	4.86	4.71	5.07	4.92	4.70	4.61	4.45	4.40	4.36	4.25	4.23	4.21	4.17																
W/W		3.29	3.27	3.25	3.29	3.28	3.14	3.13	3.03	3.03	3.12	3.03	3.11	3.18	3.17																	
Btu/h		11.23	11.16	11.09	11.23	11.19	10.71	10.68	10.34	10.34	10.65	10.34	10.61	10.85	10.82																	
CSPF			-																													
Air flow rate		m³/h	10,200 × 2	10,200 × 2	10,200 × 2	10,200 × 3	10,200 × 3	10,200 × 3	10,200 × 3	10,200 × 3	10,200 × 3	10,200 × 3	10,200 × 2 + 13,700	10,200 × 2 + 13,700	10,200 + 13,700 × 2	13,700 × 3	13,700 × 3															
Sound pressure level*1	Cooling	dB(A)	58	58	58	60	60	60	60	60	60	64	64	66	67	67																
External static pressure (Max)		Pa	82	82	82	82	82	82	82	82	82	82	82	82	82	82																
Compressor motor output		kW	4.7 × 2	4.7 × 2	4.7 × 2	4.7 × 3	4.7 × 3	4.7 × 3	4.7 × 3	4.7 × 3	4.7 × 3	4.7 × 3	4.7 × 3	4.7 × 3	4.7 × 3	4.7 × 3																
Heat exchanger fin			Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin																
Dimensions	Height	mm	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740	1,740																
	Width		930 × 2	930 × 2	930 × 2	930 × 3	930 × 3	930 × 3	930 × 3	930 × 3	930 × 2 + 1,240	930 × 2 + 1,240	930 + 1,240 × 2	1,240 × 3	1,240 × 3																	
	Depth		765	765	765	765	765	765	765	765	765	765	765	765	765																	
Weight		kg	210 × 2	210 × 2	210 × 2	210 × 3	210 × 3	210 × 3	210 × 3	210 × 3	210 × 3	210 × 3	210 × 2 + 234	210 × 2 + 234	210 + 234 × 2	234 × 3	234 × 3															
Refrigerant	Type		R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A																
	Factory charged amount		kg	9.7 × 2	9.7 × 2	9.7 × 2	9.7 × 3	9.7 × 3	9.7 × 3	9.7 × 3	9.7 × 3	9.7 × 3	9.7 × 2 + 11.8	9.7 × 2 + 11.8	9.7 + 11.8 × 2	11.8 × 3	11.8 × 3															
Connection pipe diameter		Liquid	mm	12.70	15.88	15.88	15.88	15.88	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05																
	Gas	mm	28.58	28.58	28.58	34.92	34.92	34.92	34.92	34.92	34.92	34.92	41.27	41.27	41.27	41.27																
Operating range		Cooling	°CDB	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55	10 to 55																

NOTES:

- Specifi cations are based on the following conditions:  
T1 – Condition : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
T3 – Condition : Indoor temperature of 29°CDB / 19°CWB, and outdoor temperature of 46°CDB / 24°CWB.
- Specifications and design subject to change without notice for further improvement. Please check with your dealer.
- \*1: Sound pressure level:
  - Measured values in manufacturer's anechoic chamber.
  - Because of the surrounding sound environment, the sound levels measured in actual installation conditions might be higher than the specified values here.



# Heat Pump

Modular type


VRF **V-III** Tropical **TROPICAL SPEC**

Fujitsu General tropical VRF is designed for tropical weather. Extensive lineup from 8HP to 54HP in 2HP increment connectable indoor unit capacity ratio up to 130%

## System Outline


### System configuration example

- This system is used for medium-sized and large buildings. Connecting each outdoor unit makes it possible to create a high-capacity system.
- Connection of multiple indoor units using separation tubes and headers.

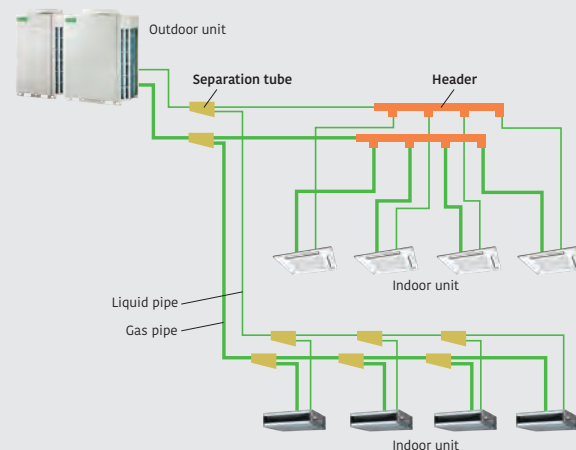


### High ambient operation design

Possible to operate cooling up to 52°C outdoor temperature



### Powerful cooling capacity design

Keeping high cooling power at even high ambient temperature



### Anti-corrosion treatment design

All metallic and PCB components are protected against corrosion




## Features



### Energy efficiency

Top class high COP is realized for all combinations by our unique heat exchanger structure, high efficient DC twin compressor, and other our own technologies.

#### Space saving combination

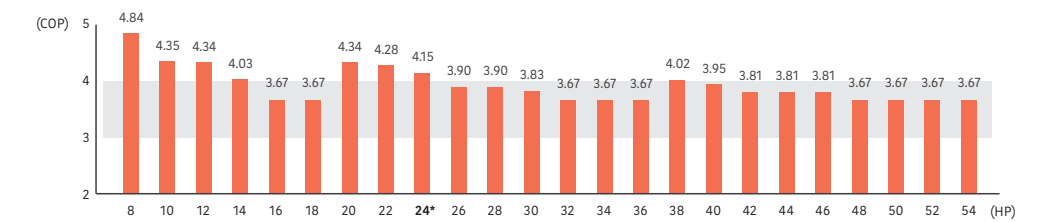

#### Energy efficiency combination

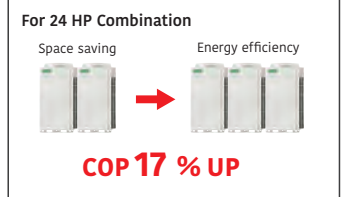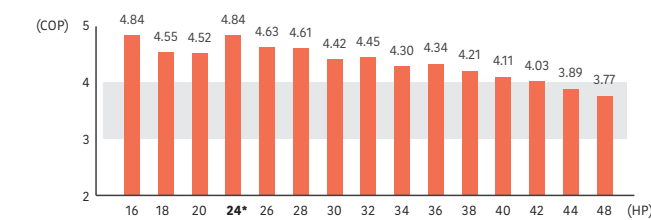

## Energy saving technology that boosted operation efficiency



### Powerful large propeller fan

By using CFD\*1 technology, a newly designed fan achieves high performance and low noise operation. \*1. CFD = Computational Fluid Dynamics



### 3 phase DC fan motor

Efficiency is substantially improved by high efficient motor with sophisticated driver control. In addition, low noise is realized by DC fan motor.




### Sine-wave DC inverter control

High efficiency is realized by adoption of reduced switching loss IPM.



### High efficient & Large capacity DC inverter compressor

Large capacity high efficient DC twin rotary compressor with 0.1Hz steps compressor speed control



### Subcool heat exchanger

High Heat Exchange efficiency is achieved by using an internal projection shape double pipe construction.



### 4-face heat exchanger


Heat exchange efficiency is significantly improved by the introduction of a 4-face heat exchanger that increases effective surface area.

### Front intake port (corner cut air inhaling structure)

## Advanced energy saving control


### Multiple outdoor operation control

This control method operates all compressors at part load and distributes refrigerant to all heat exchangers to improve the overall system efficiency.

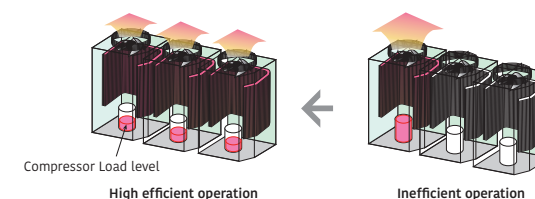

### Heat exchanger refrigerant control

The efficiency of the top and bottom heat exchanger in the outdoor unit has been improved by adopting an optimum refrigerant path control.

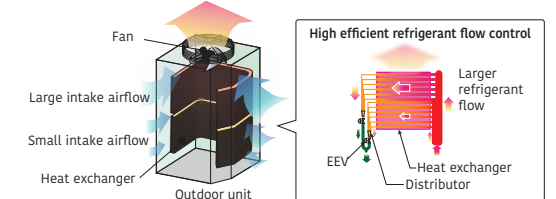































Outdoor units lineup

• Combinations other than the followings are not recommended.

Space saving combinations

72,000Btu/h (8HP)  AJ*072LN***H* UNIT : AJ*072LN***H*	90,000Btu/h (10HP)  AJ*090LN***H* UNIT : AJ*090LN***H*	108,000Btu/h (12HP)  AJ*108LN***H* UNIT : AJ*108LN***H*	126,000Btu/h (14HP)  AJ*126LN***H* UNIT : AJ*126LN***H*	144,000Btu/h (16HP)  AJ*144LN***H* UNIT : AJ*144LN***H*	162,000Btu/h (18HP)*  AJ*162LN***H* UNIT : AJ*162LN***H*
180,000Btu/h (20HP)  AJ*180LN***H* UNIT : AJ*090/090LN***H*	198,000Btu/h (22HP)  AJ*198LN***H* UNIT : AJ*126/072LN***H*	216,000Btu/h (24HP)  AJ*216LN***H* UNIT : AJ*126/090LN***H*	234,000Btu/h (26HP)  AJ*234LN***H* UNIT : AJ*144/090LN***H*	252,000Btu/h (28HP)*  AJ*252LN***H* UNIT : AJ*162/090LN***H*	252,000Btu/h (28HP)  AJ*252LN***H* UNIT : AJ*126/126LN***H*
270,000Btu/h (30HP)  AJ*270LN***H* UNIT : AJ*144/126LN***H*	288,000Btu/h (32HP)  AJ*288LN***H* UNIT : AJ*144/144LN***H*	306,000Btu/h (34HP)*  AJ*306LN***H* UNIT : AJ*162/144LN***H*	306,000Btu/h (34HP)  AJ*306LN***H* UNIT : AJ*126/090/090LN***H*	324,000Btu/h (36HP)*  AJ*324LN***H* UNIT : AJ*162/162LN***H*	324,000Btu/h (36HP)  AJ*324LN***H* UNIT : AJ*144/090/090LN***H*
342,000Btu/h (38HP)*  AJ*342LN***H* UNIT : AJ*162/090/090LN***H*	342,000Btu/h (38HP)  AJ*342LN***H* UNIT : AJ*126/126/090LN***H*	360,000Btu/h (40HP)  AJ*360LN***H* UNIT : AJ*144/126/090LN***H*	378,000Btu/h (42HP)  AJ*378LN***H* UNIT : AJ*144/144/090LN***H*	396,000Btu/h (44HP)*  AJ*396LN***H* UNIT : AJ*162/144/090LN***H*	414,000Btu/h (46HP)*  AJ*414LN***H* UNIT : AJ*162/162/090LN***H*
432,000Btu/h (48HP)  AJ*432LN***H* UNIT : AJ*144/144/144LN***H*	450,000Btu/h (50HP)*  AJ*450LN***H* UNIT : AJ*162/144/144LN***H*	468,000Btu/h (52HP)*  AJ*468LN***H* UNIT : AJ*162/162/144LN***H*	486,000Btu/h (54HP)*  AJ*486LN***H* UNIT : AJ*162/162/162LN***H*		

AJ\*\_LN\*\*\*H\* : AJH\_LNTCH-U, AJG\_LNLBH      \*: Not available to sale in some regions

Energy efficiency combinations

144,000Btu/h (16HP)  AJ*144LN***H* UNIT : AJ*072/072LN***H*	162,000Btu/h (18HP)  AJ*162LN***H* UNIT : AJ*090/072LN***H*	180,000Btu/h (20HP)  AJ*180LN***H* UNIT : AJ*108/072LN***H*	216,000Btu/h (24HP)  AJ*216LN***H* UNIT : AJ*072/072/072LN***H*	234,000Btu/h (26HP)  AJ*234LN***H* UNIT : AJ*090/072/072LN***H*	252,000Btu/h (28HP)  AJ*252LN***H* UNIT : AJ*108/072/072LN***H*
270,000Btu/h (30HP)  AJ*270LN***H* UNIT : AJ*126/072/072LN***H*	288,000Btu/h (32HP)  AJ*288LN***H* UNIT : AJ*108/108/072LN***H*	306,000Btu/h (34HP)  AJ*306LN***H* UNIT : AJ*126/108/072LN***H*	324,000Btu/h (36HP)  AJ*324LN***H* UNIT : AJ*108/108/108LN***H*	342,000Btu/h (38HP)  AJ*342LN***H* UNIT : AJ*126/108/108LN***H*	360,000Btu/h (40HP)  AJ*360LN***H* UNIT : AJ*126/126/108LN***H*
378,000Btu/h (42HP)  AJ*378LN***H* UNIT : AJ*126/126/126LN***H*	396,000Btu/h (44HP)  AJ*396LN***H* UNIT : AJ*144/126/126LN***H*	414,000Btu/h (46HP)  AJ*414LN***H* UNIT : AJ*144/144/126LN***H*			

AJ\*\_LN\*\*\*H\* : AJH\_LNTCH-UH, AJG\_LNLBHH

8,10HP: AJ\*072LN\*\*\*H\* / AJ\*090LN\*\*\*H\*  
12,14,16,18HP: AJ\*108LN\*\*\*H\* / AJ\*126LN\*\*\*H\* / AJ\*144LN\*\*\*H\* / AJ\*162LN\*\*\*H\*

AJ\*\_LN\*\*\*H\* : AJH\_LNTCH-U, AJG\_LNLBH




8, 10HP





12, 14, 16, 18HP

Dimensions

8,10HP

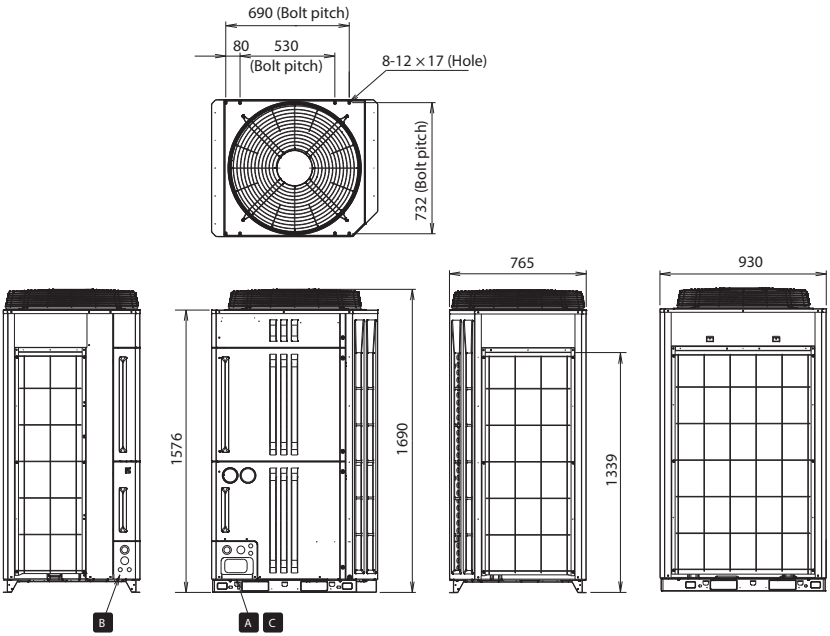

12,14,16,18HP

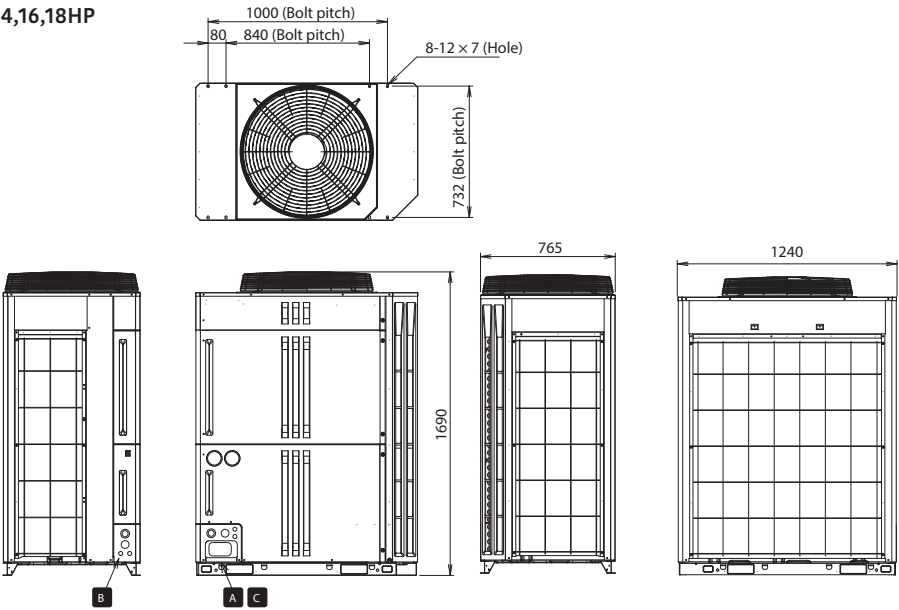



Space Saving Combinations

Nominal Capacity			HP	8	10	12	14	16	18*	20	22	24	26	28*	28	30	32	34*	34	36*	36	38*	38	40	42	44*	46*	48	50*	52*	54*		
			Btu/hr	72,000	90,000	108,000	126,000	144,000	162,000	180,000	198,000	216,000	234,000	252,000	252,000	270,000	288,000	306,000	306,000	324,000	324,000	342,000	342,000	360,000	378,000	396,000	414,000	432,000	450,000	468,000	486,000		
			Ton	6	7.5	9	10.5	12	13.5	15	16.5	18	19.5	21	21	22.5	24	25.5	25.5	27	27	28.5	28.5	30	31.5	33	34.5	36	37.5	39	40.5		
Model name				AJ*07ZLN***H*	AJ*09OLN***H*	AJ*10BLN***H*	AJ*12GLN***H*	AJ*14ALN***H*	AJ*16ZLN***H*	AJ*18OLN***H*	AJ*19BLN***H*	AJ*21GLN***H*	AJ*23ALN***H*	AJ*25ZLN***H*	AJ*25ZLN***H*	AJ*27OLN***H*	AJ*28BLN***H*	AJ*30GLN***H*	AJ*30GLN***H*	AJ*32ALN***H*	AJ*32ALN***H*	AJ*34ZLN***H*	AJ*34ZLN***H*	AJ*36OLN***H*	AJ*37BLN***H*	AJ*39GLN***H*	AJ*41ALN***H*	AJ*43ZLN***H*	AJ*45OLN***H*	AJ*46BLN***H*	AJ*48GLN***H*		
Unit 1 Unit 2 Unit 3				AJ*07ZLN***H*	AJ*09OLN***H*	AJ*10BLN***H*	AJ*12GLN***H*	AJ*14ALN***H*	AJ*16ZLN***H*	AJ*18OLN***H*	AJ*19BLN***H*	AJ*21GLN***H*	AJ*23ALN***H*	AJ*25ZLN***H*	AJ*25ZLN***H*	AJ*27OLN***H*	AJ*28BLN***H*	AJ*30GLN***H*	AJ*30GLN***H*	AJ*32ALN***H*	AJ*32ALN***H*	AJ*34ZLN***H*	AJ*34ZLN***H*	AJ*36OLN***H*	AJ*37BLN***H*	AJ*39GLN***H*	AJ*41ALN***H*	AJ*43ZLN***H*	AJ*45OLN***H*	AJ*46BLN***H*	AJ*48GLN***H*		
Maximum Connectable Indoor Unit				13	16	19	23	26	29	33	36	40	43	46	47	50	53	55	55	55	55	55	55	55	55	55	55	55	55	55	55		
Indoor unit connectable capacity			kW	11.2-29.1	14-36.4	16.8-43.5	20.0-52.0	22.5-58.5	25.0-65.0	28.0-72.8	31.2-81.1	34.0-88.4	36.5-94.9	39.0-101.4	40.0-104.0	42.5-110.5	45.0-117.0	47.5-123.5	48.0-124.8	50.0-130.0	50.5-131.3	53.0-137.8	54.0-140.4	56.5-146.9	59.0-153.4	61.5-159.9	64.0-166.4	67.5-175.5	70.0-182.0	72.5-188.5	75.0-195.0		
Power source				3 phase 4 wire, 400 V, 50Hz												3 phase 4 wire, 400 V, 50Hz																	
Capacity	Cooling(T1)	kW	22.4	28	33.5	40	45	50	56	62.4	68	73	78	80		85	90	95	96	100	101	106	108	113	118	123	128	135	140	145	150		
		Btu/h	76400	95500	114300	136500	153500	170600	191000	212900	232000	249000	266100	273000		290000	307000	324100	327500	341200	344500	361600	368500	385500	402500	419600	436700	460500	477600	494700	511800		
	Cooling(T3)	kW	20.2	25.2	28.5	32	35.1	35.2	50.4	52.2	57.2	60.3	60.4	64.0		67.1	70.2	70.3	82.4	70.4	85.5	85.6	89.2	92.3	95.4	95.5	95.6	105.3	105.4	105.5	105.6		
		Btu/h	68900	86000	97200	109200	119800	120100	172000	178100	195200	205800	206100	218400		229000	239600	239900	281200	240200	291800	292100	304400	315000	325600	325900	326200	359400	359700	360000	360300		
Input power (Outdoor unit)	Cooling(T3)*1	kW	22.4	28.0	33.5	40.0	40.0	40.0	56.0	62.4	68.0	73.0	78.0	80.0		80.0	80.0	80.0	96.0	80.0	96.0	96.0	108.0	108.0	108.0	108.0	108.0	120.0	120.0	120.0	120.0		
		Btu/h	76400	95500	114300	136500	136500	136500	191000	212900	232000	249000	266100	273000		273000	273000	273000	327500	273000	327500	327500	368500	368500	368500	368500	368500	409500	409500	409500	409500		
Current (Outdoor Unit)	Cooling(T3)*1	A	6.74	8.87	9.44	10.84	12.01	11.86	17.74	17.58	19.71	20.88	20.73	21.68		22.85	24.02	23.87	28.58	23.72	29.75	29.6	30.55	31.72	32.89	32.74	32.59	36.03	35.88	35.73	35.58		
		Heating	4.86	6.46	7.27	9.21	9.41	9.22	12.92	14.07	15.67	15.87	15.68	18.42		18.62	18.82	18.63	22.13	18.44	22.33	22.14	24.88	25.08	25.28	25.09	24.9	28.23	28.04	27.85	27.66		
Heating		A	11.2	14.2	15.1	17.2	19.0	18.6	28.4	28.4	31.4	33.2	32.8	34.4		36.2	38.0	37.6	45.6	37.2	47.4	47.0	48.6	50.4	52.2	51.8	51.4	57.0	56.6	56.2	55.8		
		Heating	8.2	10.6	12.1	14.6	15.1	14.8	21.2	22.8	25.2	25.7	25.4	29.2		29.7	30.2	29.9	35.8	29.6	36.3	36.0	39.8	40.3	40.8	40.5	40.2	45.3	45.0	44.7	44.4		
Power factor (Outdoor unit)				0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9		
EER (Outdoor Unit)			Cooling(T1)*2	W/W	4.31	3.85	3.8	3.65	3.46	3.02	3.85	3.86	3.73	3.60	3.27	3.65	3.55	3.46	3.21	3.76	3.02	3.66	3.41	3.70	3.62	3.54	3.34	3.17	3.46	3.29	3.14	3.02	
EER (System)			Cooling(T3)*1	W/W	2.91	2.76	2.92	2.86	2.83	2.86	2.76	2.88	2.81	2.80	2.82	2.86	2.84	2.83	2.84	2.80	2.86	2.79	2.80	2.83	2.82	2.81	2.82	2.83	2.83	2.84	2.85	2.86	
COP (System)				Heating	W/W	4.42	4.17	4.42	4.18	4.07	4.13	4.17	4.26	4.17	4.11	4.15	4.18	4.13	4.07	4.10	4.17	4.13	4.13	4.15	4.18	4.14	4.10	4.12	4.14	4.07	4.09	4.11	4.13
CSPF*1				Btu/h	15.05	14.20	15.05	14.25	13.85	14.05	14.20	14.50	14.20	14.00	14.10	14.25	14.05	13.85	13.95	14.20	14.05	14.05	14.15	14.20	14.10	13.95	14.05	14.10	13.85	13.95	14.00	14.05	
Air flow rate				m³/h	11,100	11,100	13,000	13,000	13,700	13,700	22,200	24,100	24,100	24,800	24,800	26,000	26,700	27,400	27,400	35,200	27,400	35,900	35,900	37,100	37,800	38,500	38,500	38,500	41,100	41,100	41,100	41,100	
Sound pressure level			Cooling	dB(A)	56	58	57	60	63	63	61	61	62	64	64	65	65	66	66	64	66	65	65	64	66	67	67	68	68	68	68		
External static pressure (Max)					Heating	58	59	60	62	64	64	62	63	64	65	65	65	66	67	67	65	67	66	66	66	67	68	68	68	69	69	69	69
Compressor motor output				Pa	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	82	
Heat exchanger fin				kW	7.5	7.5	11	11	11	11	7.5 × 2	7.5 × 2	7.5 × 2	7.5 × 2	7.5 × 2	7.5 × 2	7.5 × 2	7.5 × 2	7.5 × 3	7.5 × 2	7.5 × 2	7.5 × 3	7.5 × 3	7.5 × 3	7.5 × 3	7.5 × 3	7.5 × 3	7.5 × 3	7.5 × 3	7.5 × 3	7.5 × 3	7.5 × 3	
Dimensions			Height	mm	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	Blue fin	
Weight					Type	kg	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690	1,690
Refrigerant							930	930	1,240	1,240	1,240	1,240	930 × 2	1240 × 930	1240 × 930	1240 × 930	1240 × 930	1240 × 930	1240 × 2	1240 × 2	1240 × 2	1240 × 2	1240 × 2	1240 × 2	1240 × 2	1240 × 2 + 930	1240 × 2 + 930	1240 × 2 + 930	1240 × 2 + 930	1240 × 2 + 930	1240 × 2 + 930	1240 × 3	1240 × 3
Connection pipe diameter			Liquid	mm	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	765	
Operating range					Gas	255	255	279	279	279	279	255 × 2	279 + 255	279 + 255	279 + 255	279 + 255	279 × 2	279 × 2	279 × 2	279 × 2	279 + 255 × 2	279 × 2	279 + 255 × 2	279 + 255 × 2	279 + 255 × 2	279 × 2 + 255	279 × 2 + 255	279 × 2 + 255	279 × 2 + 255	279 × 3	279 × 3	279 × 3	279 × 3
Factory charged amount			kg	R410A		R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	
Connection pipe diameter				Liquid	mm	11.7	11.7	11.8	11.8	11.8	11.7 x 2	11.8 × 11.7	11.8 × 11.7	11.8 × 11.7	11.8 × 11.7	11.8 × 2	11.8 × 2	11.8 × 2	11.8 × 2	11.8 × 11.7 × 2	11.8 × 2	11.8 × 11.7 × 2	11.8 × 11.7 × 2	11.8 × 2 + 11.7	11.8 × 2 + 11.7	11.8 × 2 + 11.7	11.8 × 2 + 11.7	11.8 × 2 + 11.7	11.8 × 3	11.8 × 3	11.8 × 3	11.8 × 3	
Connection pipe diameter			Gas			12.70	12.70	12.70	12.70	12.70	15.88	15.88	15.88	15.88	15.88	15.88	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05	19.05
Operating range				Cooling	°CDB	22.22	22.22	28.58	28.58	28.58	28.58	34.92	34.92	34.92	34.92	34.92	34.92	34.92	34.92	34.92	41.27	41.27	41.27	41.27	41.27	41.27	41.27	41.27	41.27	41.27	41.27	41.27	
Operating range			Heating			-15 to 52	-15 to 52	-15 to 52	-15 to 52	-15 to 52	-15 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	-5 to 52	
Operating range				Heating	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 21	-20 to 20																	

\*: Not available to sale in some regions

Energy Efficiency Combinations

Nominal Capacity			HP	16	18	20	24	26
------------------	--	--	----	----	----	----	----	----



# VRF INDOOR UNITS

for VC-V

## INDOOR UNITS LINE-UP

3D Flow Cassette

One Way Flow Cassette

Compact Cassette

Circular Flow Cassette

Mini Duct

Slim Duct

Medium Static Pressure Duct

High Static Pressure Duct

Floor / Ceiling

Ceiling

Wall Mounted (EEV Internal / external)

for V-III Tropical and J-III series Tropical

## INDOOR UNITS LINE-UP

Compact Cassette

4-way Flow Cassette

Circular Flow Cassette

Mini Duct

Slim Duct / Slim Concealed Floor

Medium Static Pressure Duct

High Static Pressure Duct

Floor / Ceiling

Ceiling

Wall Mounted (EEV Internal / external)

A lineup with air conditioning capacities ranging from a minimum of 2.2 kW to a maximum of 28 kW. 13 types are available to meet the requirements of any building design.




















































































































VRF indoor units were developed to be highly efficient, compact, low noise and to have user friendly operation. With a variety of indoor units and capacities available, Fujitsu General has an indoor unit to match any requirement which is easy to install and maintain. Further, a variety of options are available to achieve an air conditioning environment that is more desirable from the user's perspective.



# INDOOR UNITS LINE-UP for VC-V

Comprehensive range of indoor units of variety design and capacity ranges available which can be selected to suit any air conditioning needs.

## Indoor units range

Capacity range		Btu/h	7,000	9,000	12,000	14,000	18,000	24,000	30,000	34,000	36,000	45,000	54,000	60,000	72,000	90,000	96,000	
		kW	2.2	2.8	3.6	4.5	5.6	7.1	9.0	10.0	11.2	12.5	14.0	18.0	22.4	25.0	28.0	
Cassette	3D flow cassette																	
	One way flow cassette																	
	Compact Cassette	 	 	 	 	 	 											
	Circular Flow	(Slim type)					 	 										
		(Large type)					 	 	 	 	 	 	 					
Duct	Mini Duct (With drain pump)																	
	Mini Duct (Without drain pump)																	
	Slim Duct (With drain pump)	 	 	 	 	 	 											
	Medium Static Pressure Duct						 	 		 	 							
	High Static Pressure Duct																	
Floor	Floor (Same as Ceiling models)																	
	Slim Concealed Floor (Same as Slim Duct models)	 	 	 	 	 	 											
Ceiling	Ceiling																	
Wall Mounted	Wall Mounted																	
	Wall Mounted (EEV external)					With this model, connection of EV kit is necessary.												





3D Flow  
Cassette



3 individually controlled air outlet ports

The Comfortable airflow setting enables the left and right air outlet ports as well as the wide center port to work together to provide a comfortable room environment.


Temperature distribution during cooling and heating  
(when set to Comfortable airflow)

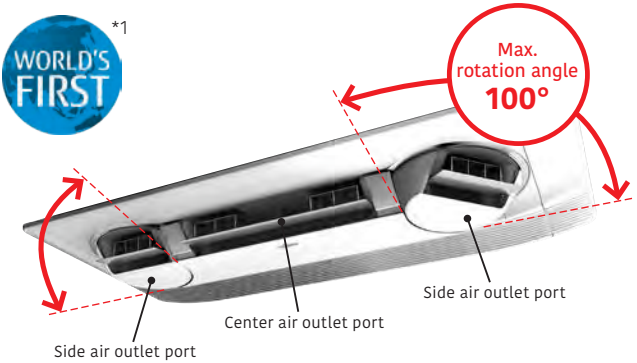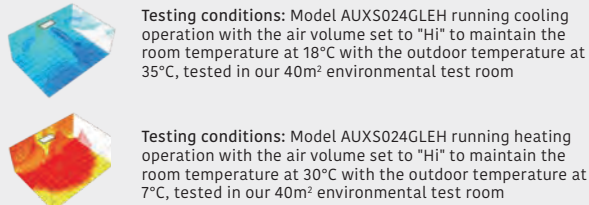

\*1: Announced 2018. In the category of room air conditioners for the home (source: Fujitsu General Limited).

Individual airflow setting

The individual airflow setting function optimizes the airflow direction to match the room layout.

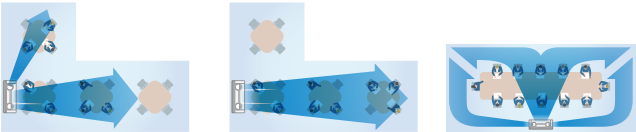

Adjusts airflows from the side air outlet ports to match the layout and usage of the room to minimize the amount of wasted airflow.

The airflow is optimally controlled to provide improved comfort in a narrow room.

Individual control of air outlet ports


Individual airflow can be set using a Wired remote controller with touch panel, Design type and Central remote controller\*. The airflow from each air outlet port can be set individually.



\* Feature available only on UTY-RNRGZ5 Wired remote controller with touch panel and UTY-DCGGZ3 Central remote controller

High energy saving

The structural design to take in a larger volume of air and blow air out more smoothly reduces air blowing loss and achieves class-leading energy-saving performance.

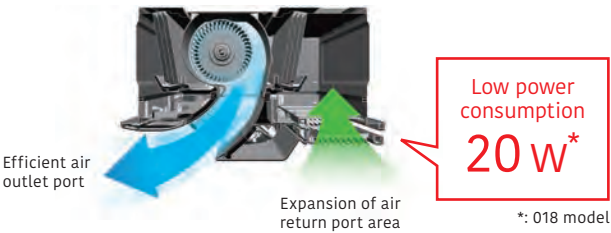

Model: AUGS018GLEH-U / AUGS024GLEH-U



Specifications


Model name			AUGS018GLEH-U		AUGS024GLEH-U	
Power source			Single phase, 230 V, ~50/60 Hz			
Capacity		Cooling	kW	5.60	7.10	
Input power			W	20	34	
Airflow rate	High	m³/h (l/s)	750(208)	950(264)		
	Med-High		710(197)	890(247)		
	Med		690(192)	860(239)		
	Med-Low		660(183)	810(225)		
	Low		630(175)	770(214)		
	Quiet		540(150)	540(150)		
Sound pressure level	High	dB (A)	38	43		
	Med-High		36	42		
	Med		35	41		
	Med-Low		35	40		
	Low		33	38		
	Quiet		29	29		
Dimensions (H × W × D)			mm	200 × 1,240 × 500	200 × 1,240 × 500	
Weight			kg(lbs)	25(55)	25(55)	
Connection pipe diameter	Liquid (Flare)	mm	6.35	9.52		
	Gas (Flare)		12.70	15.88		
Drain hose diameter (I.D./O.D.)			25 / 32			
Cassette Grille	Model name		UTG-USGA-W			
	Dimensions (H×W×D)		mm	85 × 1,350 × 580		
	Weight		kg(lbs)	11.5(25)		

Note: Specifications are subject to the following conditions:  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]  
\*: Applicable to cooling and heating operation

Optional parts

WLAN adapter: UTY-TFSXJ3  
IR Receiver Unit: UTY-TRHX  
Cassette Grille: UTG-USGA-W  
Remote sensor unit: UTY-XSZXZ1  
External power supply unit: UTZ-GXXA, UTZ-GXXC

Dimensions (Unit: mm)

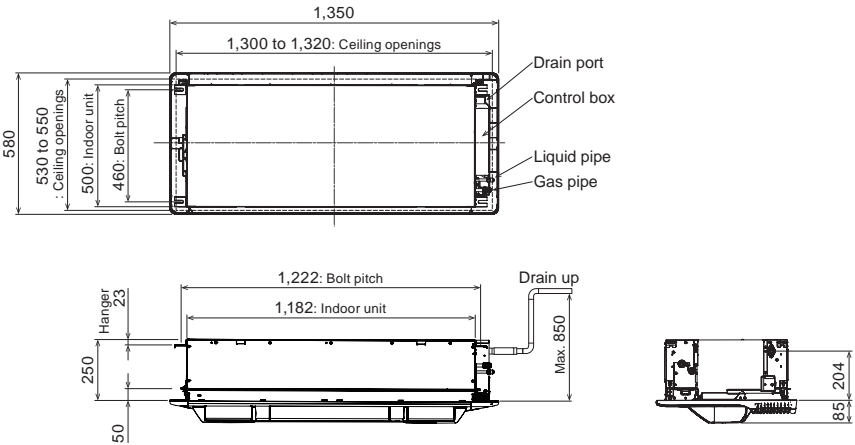



Cassette  
One-way Flow type




Compact chassis size

The compact size allows easy installation in a variety of commercial facilities and environments.


- The height of the chassis is less than 200 mm for all models.
- All 4 to 12 kBTu models are less than 1,000 mm wide.
- The depth of the chassis is 570 mm, which fits nicely into a grid type ceiling.

Dimensions (Panel size) <span>(Unit: mm)</span>						
	7	9	12	14	18	24
H		198 (43)			198 (43)	
W		785 (950)			1,190 (1,360)	
D		570 (620)			570 (620)	

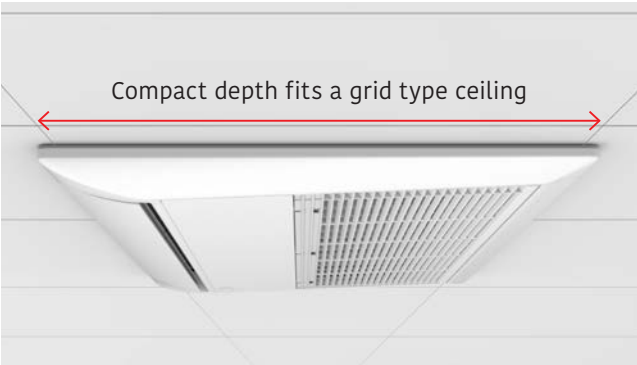

Wide airflow range


A large flap with a wide range of movements, equipped with louvers arranged triangularly, sends air into every corner of the room.

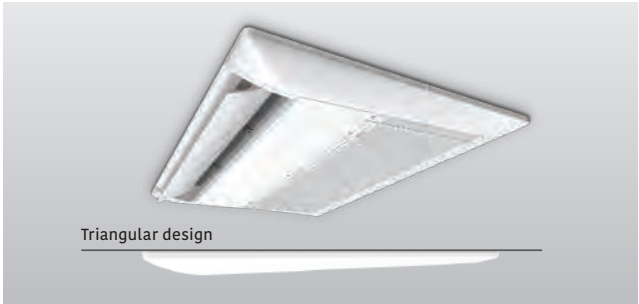

In cooling mode, the left/right airflow reaches every corner of the room without directly touching the human body to provide comfortable air conditioning.



In heating mode, warm air is directed downward toward the floor to warm the feet and lower body, while the head is kept relatively cool.

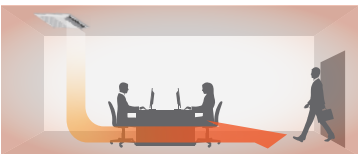

Note: This is a conceptual drawing. The performance of an air conditioner may vary depending on where it is installed, the size of the room, and its distance from the wall.

Quiet mode

The low operating noise makes the model ideal for use in hotel rooms.



Model: AUGV007GLEH-U / AUGV009GLEH-U / AUGV012GLEH-U  
AUGV014GLEH-U / AUGV018GLEH-U / AUGV024GLEH-U



Specifications

Model name			AUGV007GLEH-U	AUGV009GLEH-U	AUGV012GLEH-U	AUGV014GLEH-U	AUGV018GLEH-U	AUGV024GLEH-U
Power source			Single phase, 230 V, ~50/60 Hz					
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6	7.1
Input power		W	42	42	60	38	56	99
Airflow rate	High	m³/h (l/s)	550 (153)	550 (153)	670 (186)	720 (200)	890 (247)	1,150 (319)
	Med-High		440 (122)	440 (122)	520 (144)	660 (183)	840 (233)	1,020 (283)
	Med		420 (117)	420 (117)	480 (133)	630 (175)	770 (214)	940 (261)
	Med-Low		400 (111)	400 (111)	450 (125)	600 (167)	710 (197)	790 (219)
	Low		380 (106)	380 (106)	410 (114)	580 (161)	660 (183)	700 (194)
	Quiet		360 (100)	360 (100)	360 (100)	550 (153)	580 (161)	610 (169)
Sound pressure level	High	dB (A)	42	42	45	37	44	49
	Med-High		37	37	41	36	43	47
	Med		36	36	39	35	40	45
	Med-Low		35	35	38	34	38	42
	Low		33	33	36	33	36	39
	Quiet		32	32	32	32	34	36
Dimensions (H × W × D)		mm	198 × 785 × 570	198 × 785 × 570	198 × 785 × 570	198 × 1,190 × 570	198 × 1,190 × 570	198 × 1,190 × 570
Weight		kg(lbs)	19(42)	19(42)	19(42)	26(57)	26(57)	27(60)
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	6.35	9.52
	Gas (Flare)		9.52	9.52	12.70	12.70	12.70	15.88
Drain hose diameter (I.D./O.D.)			25 / 32					
Cassette Grille	Model name		UTG-UNGA-W			UTG-UNGB-W		
	Dimensions (H×W×D)	mm	43 × 950 × 620			43 × 1,360 × 620		
	Weight	kg(lbs)	6.5(14)			8.5(19)		


Note: Specifications are subject to the following conditions:  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]

Optional parts


WLAN adapter: UTY-TFSXJ3  
IR Receiver Unit: UTY-TRHX  
Cassette Grille: UTG-UNGA-W (007-012),  
UTG-UNGB-W (014-024)  
External power supply unit: UTZ-GXXA, UTZ-GXXC  
Remote sensor unit: UTY-XSZXZ1

Flexible Installation

The L-shaped pipe kit allows for more flexible installation. Equipped with a built-in drain pump as standard, which enables a maximum pipe height difference of 700 m from the ceiling.



Dimensions (Unit: mm)

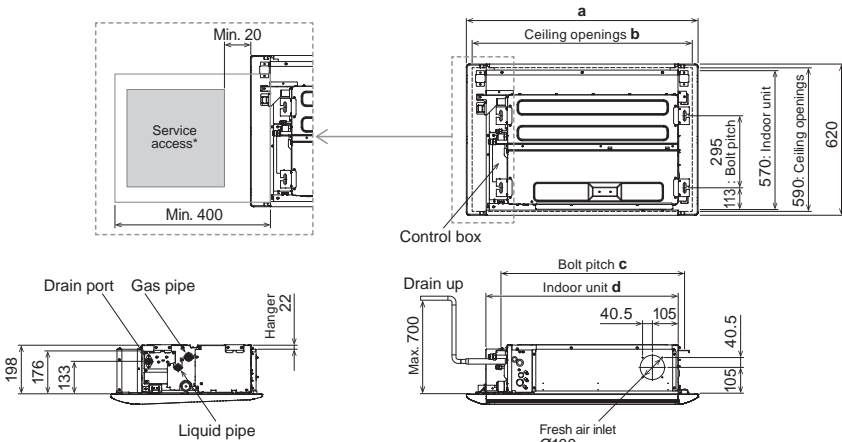

	AUGV 007 / 009 / 012 GLEH-U	AUGV 014 / 018 / 024 GLEH-U
a	950	1,360
b	920	1,330
c	752	1,152
d	785	1,190

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.




Compact  
Cassette

Grid type



Compact and stylish panel

The compact and stylish panel fits nicely into a grid type ceiling. The linear design is a perfect fit into a grid of 620 mm × 620 mm in the ceiling.

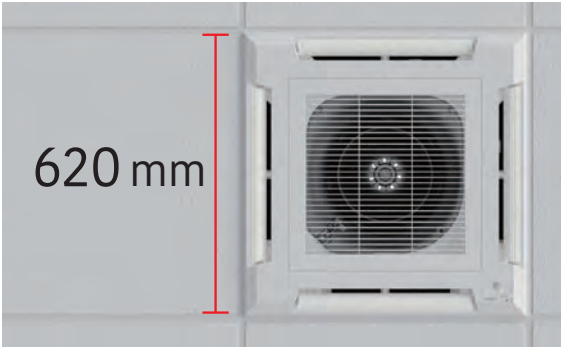


Easy maintenance

You can access the unit for maintenance just by removing a ceiling panel right next to the grille. As no inspection hole needs to be cut through the ceiling, no additional construction cost is incurred.



The air inlet grille can be installed to open in any direction for easy maintenance.

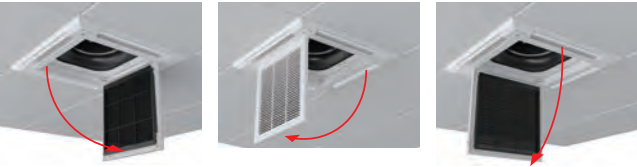

Flexible installation

The unit fits nicely into the decor of a grid type ceiling and can be installed near a lighting or a ventilation opening.



High ceiling mode

The cassette can be installed up to a height of 3.0 m. (012/014/018/024).

Model code	The maximum height from floor to ceiling (m)	
	Standard mode	High ceiling mode
007	2.7	—
009	2.7	—
012	2.7	3.0
014	2.7	3.0
018	2.7	3.0
024	2.7	3.0

Model: AUGB007GLEH-U / AUGB009GLEH-U / AUGB012GLEH-U  
AUGB014GLEH-U / AUGB018GLEH-U / AUGB024GLEH-U  
AUGB007GTEH-U / AUGB009GTEH-U / AUGB012GTEH-U  
AUGB014GTEH-U / AUGB018GTEH-U / AUGB024GTEH-U




Specifications

Model name			AUGB007GLEH-U AUGB007GTEH-U	AUGB009GLEH-U AUGB009GTEH-U	AUGB012GLEH-U AUGB012GTEH-U	AUGB014GLEH-U AUGB014GTEH-U	AUGB018GLEH-U AUGB018GTEH-U	AUGB024GLEH-U AUGB024GTEH-U
Power source			Single phase, 230V, ~50/60Hz					
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6	7.1
Input power		W	25	25	29	35	36	84
Airflow rate	High	m³/h (l/s)	540 (150)	550 (153)	600 (167)	680 (189)	710 (197)	1,030 (286)
	Med-High		500 (139)	520 (144)	560 (156)	620 (172)	660 (183)	910 (253)
	Med		460 (128)	480 (133)	520 (144)	560 (156)	590 (164)	790 (219)
	Med-Low		420 (117)	440 (122)	480 (133)	500 (139)	520 (144)	680 (189)
	Low		390 (108)	400 (111)	430 (119)	440 (122)	460 (128)	560 (156)
	Quiet		350 (97)	350 (97)	390 (108)	390 (108)	400 (111)	450 (125)
Sound pressure level	High	dB (A)	34	35	37	38	41	50
	Med-High		32	33	34	37	39	46
	Med		30	31	33	34	36	43
	Med-Low		28	29	31	32	33	39
	Low		27	27	29	30	30	35
	Quiet		25	25	27	27	27	30
Dimensions (H × W × D)		mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
Weight		kg(lbs)	15(33)	15(33)	2.3(5)	2.3(5)	2.3(5)	2.3(5)
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	6.35	9.52
	Gas (Flare)		9.52	9.52	12.70	12.70	12.70	15.88
Drain hose diameter (I.D./O.D.)			25 / 32					
Cassette Grille	Model name		UTG-UFGE-W					
	Dimensions (H×W×D)		50 × 620 × 620					
	Weight	kg(lbs)	2.3(5)					


Note: Specifications are subject to the following conditions:  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]  
\*1: This value is under cooling operation.

Optional parts

Air Outlet Shutter Plate: UTR-YDZB  
Fresh Air Intake Kit: UTZ-VXAA  
Insulation Kit for high humidity: UTZ-KXGC  
Remote sensor unit: UTY-XSZXZ1  
Cassette Grille: UTG-UFGE-W  
External power supply unit: UTZ-GXXA, UTZ-GXXC  
WLAN adapter: UTY-TFSXJ3

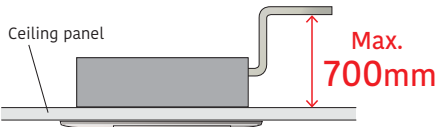

Dimensions (Unit: mm)

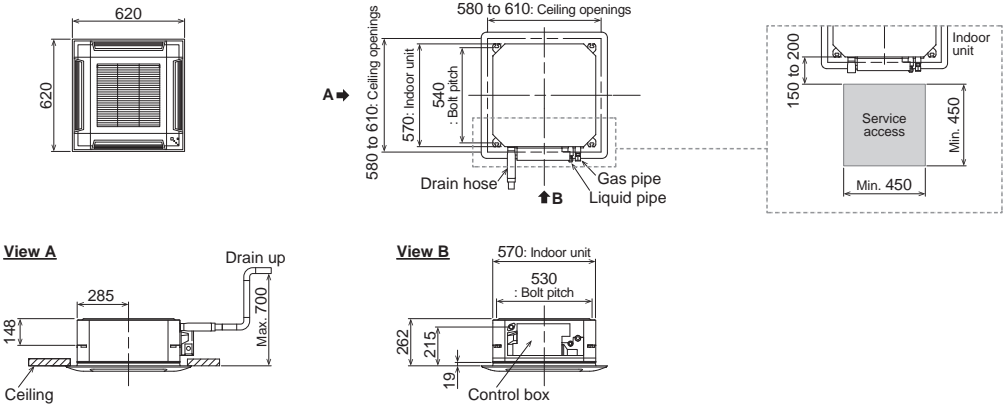






Cassette  
Slim type  
Circular Flow




Unique Circular Flow design

New Cassette type realizes Circular Flow to blow large airflow in 360° direction by mounting high performance DC fan motor, new turbo fan and unique seamless airflow louver design.

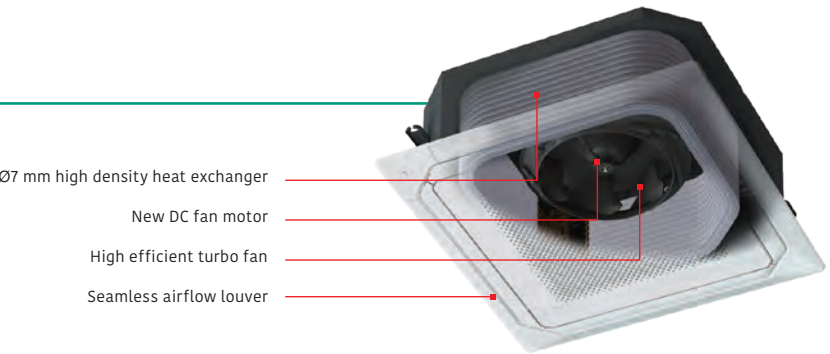

Uniform temperature air conditioning


Achieve a comfortable air conditioning spread to every corner of the room by circular flow & wide vertical airflow.

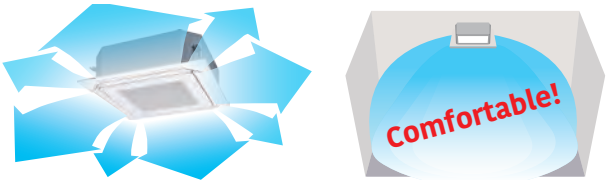


Individual louver control

Each louver can be set individually by Touch Panel Wired Remote Controller to enjoy the comfort of different directional airflows according to various room layouts.

\* Touch Panel Wired RC (UTY-RNRGZ5) and Central Remote Controller(UTY-DCGGZ3) only



Comfortable air conditioning by preventing direct blowing of cold air and by providing swinging air flow simultaneously.



Efficient air conditioning based on the room layout

Occupancy sensor increases more energy saving

Energy saving operation starts automatically by detecting the motion of a person. 2 modes of save operation mode and stop mode can be selected.

\* Touch Panel Wired RC (UTY-RNRGZ5) and Central Remote Controller(UTY-DCGGZ3) only



Human sensor (Optional)

2 modes can be selected

- Auto saving

Power is saved while people are away.
- Auto OFF

Operation stops after people go out.

Model: AUGN009GLAH-U / AUGN012GLAH-U  
AUGN014GLAH-U  
AUGM018GLEH-U / AUGM024GLEH-U  
AUGM018GTEH-U / AUGM024GTEH-U



Black panel

Specifications


Model name			AUGN009GLAH-U	AUGN012GLAH-U	AUGN014GLAH-U	AUGM018GLEH-U AUGM018GTEH-U	AUGM024GLEH-U AUGM024GTEH-U	
Power source			Single phase, 230V, ~50/60Hz					
Capacity	Cooling	kW	2.8	3.6	4.5	5.6	7.1	
Input power		W	20	20	20	20	25	
Airflow rate	High	m³/h (l/s)	1,050 (292)	1,050 (292)	1,050 (292)	1,050 (292)	1,120 (311)	
	Med-High		930 (258)	930 (258)	930 (258)	930 (258)	1,050 (292)	
	Med		900 (250)	900 (250)	900 (250)	900 (250)	930 (258)	
	Med-Low		870 (242)	870 (242)	870 (242)	870 (242)	900 (250)	
	Low		810 (225)	810 (225)	810 (225)	810 (225)	870 (242)	
	Quiet		780 (217)	780 (217)	780 (217)	780 (217)	780 (217)	
Sound pressure level	High	dB (A)	33	33	33	33	35	
	Med-High		32	32	32	32	33	
	Med		31	31	31	31	32	
	Med-Low		30	30	30	30	31	
	Low		29	29	29	29	30	
	Quiet		28	28	28	28	28	
Dimensions (H × W × D)		mm	246×840×840	246×840×840	246×840×840	246×840×840	246×840×840	
Weight		kg(lbs)	24.5(54)	24.5(54)	24.5(54)	24(53)	24.5(54)	
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	9.52	
	Gas (Flare)		12.70	12.70	12.70	12.70	15.88	
Drain hose diameter (I.D./O.D.)				25 / 32				
Cassette Grille	Model name		UTG-UKGD-W and UTG-UKGC-W / UTG-UKGA-B					
	Dimensions (H×W×D)	mm	53 × 950 × 950					
	Weight	kg(lbs)	6(13)					

Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].  
When AUG\*018GTAH is connected to the outdoor unit other than J-IIIIL, pipe diameter should be Ø9.52/Ø15.88 (Liq/Gas)

Optional parts

Human Sensor Kit: UTY-SHZXC	Cassette Grille: UTG-UKGD-W	IR Receiver Unit: UTY-LBHXD	External power supply unit: UTZ-GXXA, UTZ-GXXC
Wide Panel: UTG-AKXA-W	UTG-UKGA-B	Air Outlet Shutter Plate: UTR-YDZK	WLAN adapter: UTY-TFSXJ3
Panel Spacer: UTG-BKXA-W	UTG-UKGC-W	Insulation Kit for High Humidity: UTZ-KXRA	Remote sensor unit: UTY-XSZXZ1

Dimensions (Unit: mm)

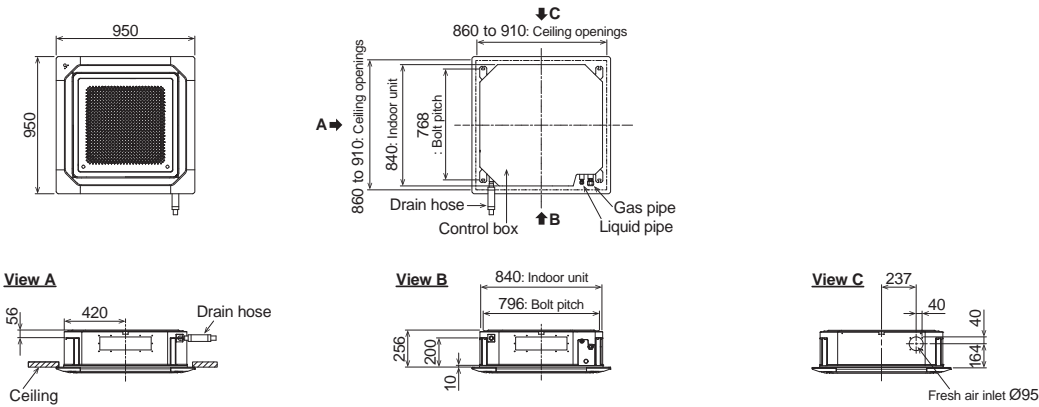




Cassette  
Large type  
Circular Flow




Unique Circular Flow design

New Cassette type realizes Circular Flow to blow large airflow in 360° direction by mounting high performance DC fan motor, new turbo fan and unique seamless airflow louver design.

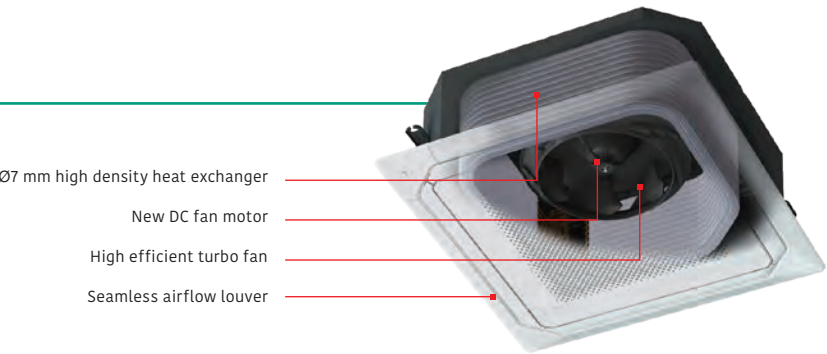

Uniform temperature air conditioning


Achieve a comfortable air conditioning spread to every corner of the room by circular flow & wide vertical airflow.

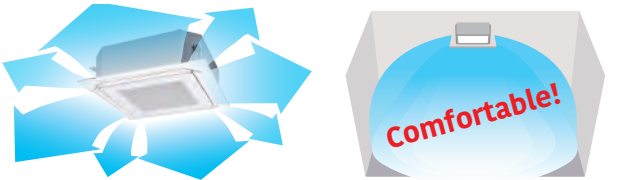


Individual louver control

Each louver can be set individually by Touch Panel Wired Remote Controller to enjoy the comfort of different directional airflows according to various room layouts.

\* Touch Panel Wired RC (UTY-RNRGZ5) and Central Remote Controller(UTY-DCGGZ3) only



Comfortable air conditioning by preventing direct blowing of cold air and by providing swinging air flow simultaneously.



Efficient air conditioning based on the room layout

Occupancy sensor increases more energy saving

Energy saving operation starts automatically by detecting the motion of a person. 2 modes of save operation mode and stop mode can be selected.

\* Touch Panel Wired RC (UTY-RNRGZ5) and Central Remote Controller(UTY-DCGGZ3) only



Human sensor (Optional)

2 modes can be selected

- Auto saving

Power is saved while people are away.
- Auto OFF

Operation stops after people go out.

Model: AUGK018GLEH-U / AUGK024GLEH-U  
AUGK030GLEH-U / AUGK034GLEH-U  
AUGK036GLEH-U / AUGK045GLEH-U  
AUGK054GLEH-U  
AUGK018GTEH-U / AUGK024GTEH-U  
AUGK030GTEH-U / AUGK034GTEH-U  
AUGK036GTEH-U / AUGK045GTEH-U  
AUGK054GTEH-U



Black panel

Specifications


Model name			AUGK018GLEH-U AUGK018GTEH-U	AUGK024GLEH-U AUGK024GTEH-U	AUGK030GLEH-U AUGK030GTEH-U	AUGK034GLEH-U AUGK034GTEH-U	AUGK036GLEH-U AUGK036GTEH-U	AUGK045GLEH-U AUGK045GTEH-U	AUGK054GLEH-U AUGK054GTEH-U
Power source			Single phase, 230V, ~50/60Hz						
Capacity	Cooling	kW	5.6	7.1	9.0	10.0	11.2	12.5	14.0
Input power		W	40	40	47	47	61	89	116
Airflow rate	High	m³/h (l/s)	1,420 (394)	1,420 (394)	1,440 (400)	1,440 (400)	1,620 (450)	1,820 (506)	2,040 (567)
	Med-High		1,360 (378)	1,360 (378)	1,400 (389)	1,400 (389)	1,500 (417)	1,590 (442)	1,800 (500)
	Med		1,300(361)	1,300(361)	1,340 (372)	1,340 (372)	1,400 (389)	1,500 (417)	1,590 (442)
	Med-Low		1,270 (353)	1,270 (353)	1,300(361)	1,300(361)	1,340 (372)	1,400 (389)	1,440 (400)
	Low		1,200 (333)	1,200 (333)	1,280 (356)	1,280 (356)	1,280 (356)	1,300 (361)	1,300 (361)
	Quiet		1,150 (319)	1,150 (319)	1,150 (319)	1,150 (319)	1,150 (319)	1,150 (319)	1,150 (319)
Sound pressure level	High	dB (A)	38	38	39	39	41	44	47
	Med-High		37	37	38	38	40	42	45
	Med		36	36	37	37	38	40	42
	Med-Low		35	35	36	36	37	38	39
	Low		34	34	35	35	35	36	36
	Quiet		33	33	33	33	33	33	33
Dimensions (H × W × D)		mm	288×840×840	288×840×840	288×840×840	288×840×840	288×840×840	288×840×840	288×840×840
Weight		kg(lbs)	26.5(58)	26.5(58)	29.5(65)	29.5(65)	29.5(65)	29.5(65)	29.5(65)
Connection pipe diameter	Liquid (Flare)	mm	6.35	9.52	9.52	9.52	9.52	9.52	9.52
	Gas (Flare)		12.70	15.88	15.88	15.88	15.88	15.88	15.88
Drain hose diameter (I.D./O.D.)			25 / 32						
Cassette Grille	Model name		UTG-UKGD-W and UTG-UKGC-W / UTG-UKGA-B						
	Dimensions (H×W×D)	mm	53 × 950 × 950						
	Weight	kg(lbs)	6(13)						

Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].  
When AUXK036GTAH is connected to the outdoor unit other than J-IIIIL, gas pipe diameter should be Ø19.05.

Optional parts

Human Sensor Kit: UTY-SHZXC	Cassette Grille: UTG-UKGD-W	IR Receiver Unit: UTY-LBHXD	External power supply unit: UTZ-GXXA, UTZ-GXXC
Wide Panel: UTG-AKXA-W	UTG-UKGA-B	Air Outlet Shutter Plate: UTR-YDZK	WLAN adapter: UTY-TFSXJ3
Panel Spacer: UTG-BKXA-W	UTG-UKGC-W	Insulation Kit for High Humidity: UTZ-KXRA, UTZ-KXGA	Remote sensor unit: UTY-XSZXZ1

Dimensions (Unit: mm)

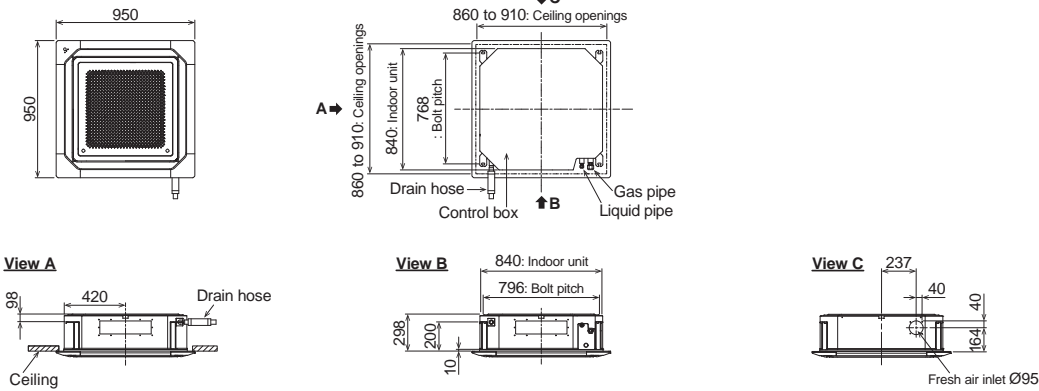




Mini Duct




Optimum design in harmony with interior decoration

Thin and short-depth body makes the clipped ceiling design

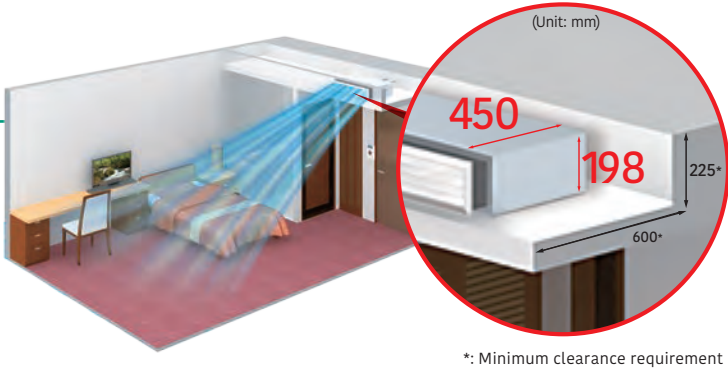


Advanced performance by new shaped heat exchanger and airflow

Air blower is improved so that velocity distribution is optimum in accordance with the heat exchanger shape. Wide range and uniform airflow can be received due to heat exchanger.

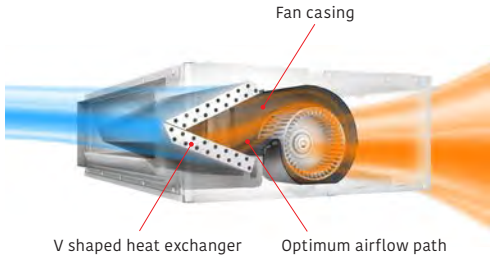

6-speed control\*


Multistep airflow speed control allows this model to install in a quiet location.

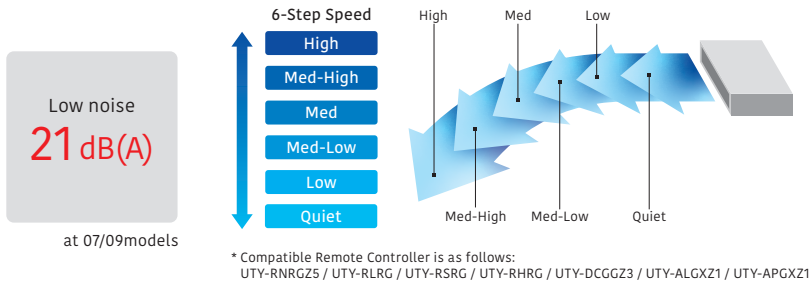


Easy drain design even at narrow ceiling

**Models with drain pump:**  
Drainage to the distant drain port is possible.

**Models without drain pump:**  
Both sides drainage is possible.




For models with drain pump, drain design is easy even at narrow ceiling.



For models without drain pump, both sides drainage is possible and drain design is easy.

**Model: (With drain pump)**  
ARGK007GLGH-U / ARGK009GLGH-U  
ARGK012GLGH-U / ARGK014GLGH-U  
ARGK018GLGH-U / ARGK024GLGH-U

**(Without drain pump)**  
ARGK007GLHH-U / ARGK009GLHH-U  
ARGK012GLHH-U / ARGK014GLHH-U  
ARGK018GLHH-U / ARGK024GLHH-U

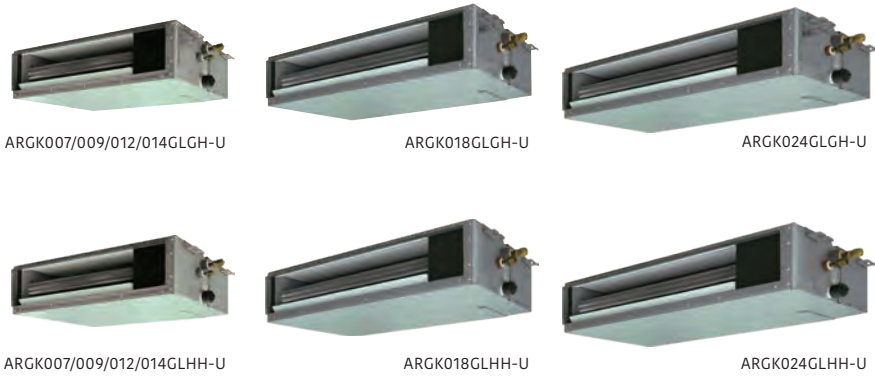

Specifications

Model name			ARGK007GLGH-U ARGK007GLHH-U	ARGK009GLGH-U ARGK009GLHH-U	ARGK012GLGH-U ARGK012GLHH-U	ARGK014GLGH-U ARGK014GLHH-U	ARGK018GLGH-U ARGK018GLHH-U	ARGK024GLGH-U ARGK024GLHH-U
Power source			Single phase, 230V, ~50/60Hz					
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6	7.1
Input power	GLGH / GLHH	W	28 / 21	28 / 21	35 / 28	66 / 59	73 / 66	80 / 73
Airflow rate	High	m³/h (l/s)	460 (128)	460 (128)	550 (153)	760 (211)	930 (258)	1,160 (322)
	Med-High		440 (122)	440 (122)	520 (144)	660 (183)	840 (233)	1,060 (294)
	Med		420 (117)	420 (117)	480 (133)	560 (156)	740 (206)	960 (267)
	Med-Low		400 (111)	400 (111)	450 (125)	490 (136)	640 (178)	860 (239)
	Low		370 (103)	370 (103)	410 (114)	410 (114)	540 (150)	750 (208)
	Quiet		340 (94)	340 (94)	340 (94)	340 (94)	470 (131)	610 (169)
Static pressure range		Pa	0 to 30		0 to 30		0 to 50	
Standard static pressure			10	10	10	15	15	
Sound pressure level	High	dB (A)	26	26	29	34	33	32
	Med-High		25	25	27	31	30	30
	Med		24	24	26	28	28	28
	Med-Low		23	23	25	26	26	27
	Low		22	22	24	24	24	25
	Quiet		21	21	22	22	22	22
Dimensions (H × W × D)		mm	198 × 700 × 450		198 × 700 × 450		198 × 700 × 450	
Weight	GLGH / GLHH	kg(lbs)	15.5(34) / 15.0(33)		15.5(34) / 15.0(33)		16.0(35) / 15.5(34)	
Connection pipe diameter	Liquid (Flare)	mm	6.35		6.35		6.35	
	Gas (Flare)		9.52		12.70		12.70	
Drain hose diameter (I.D./O.D.)			25 / 32					

Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts



Auto louvre grille kit: UTD-GXTA-W (for ARGK007 - 014)  
UTD-GXTB-W (for ARGK018)  
UTD-GXTC-W (for ARGK024)  
Remote sensor unit: UTY-XSZXZ1  
IR Receiver Unit: UTY-TRHX  
WLAN adapter: UTY-TFSXJ3  
External power supply unit: UTZ-GXXA, UTZ-GXXC

Auto Louver Grille Kit (Option)

• Thin design provides a comfortable living environment over a wide area.  
• Automatic louver grille provides comfortable air conditioning all the way down to the floor and matches the interior design well. (Optional)



Dimensions (Unit: mm)

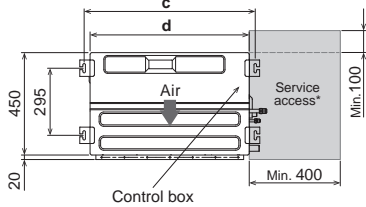

	ARGK007-014	ARGK018	ARGK024
a	575	775	975
b	P200x2=400	P200x3=600	P200x4=800
c	752	952	1,152
d	700	900	1,100
e	650	850	1,050
f	P100x6=600	P100x8=800	P100x10=1,000

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.




Slim Duct/  
Slim Concealed  
Floor  
(With drain pump)




Slim design

With a slim indoor design, this indoor can be installed in narrow ceiling spaces.

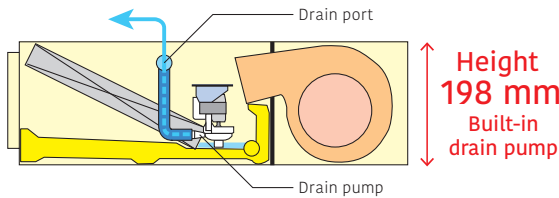


Air-intake

Air intake direction can be selected to match the installation site.

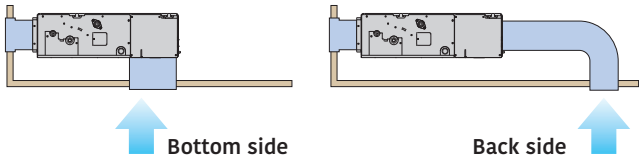


Flexible installation

Ceiling concealed

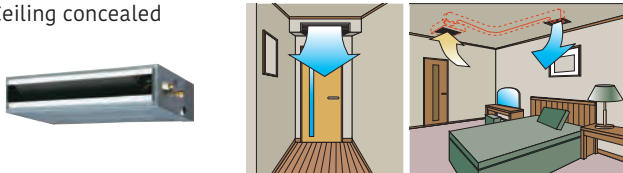

Floor concealed

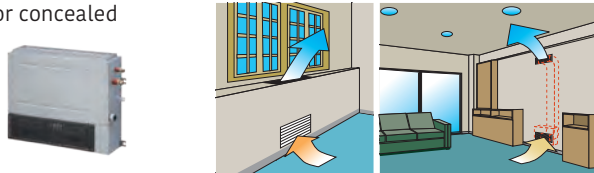

Selectable with a wide range of  
static pressure


By using DC fan motor, it is possible to change of static pressure range 0 to 90 Pa. The change of static pressure range is possible by remote controller.




Static pressure range  
**0 to 90 Pa**  
\*24 model is 0 to 50 Pa

Filter (Accessory)

ARGD07 / 09 / 12 / 14 / 18



ARGD24



Model: ARGD007GLEH-U / ARGD009GLEH-U / ARGD012GLEH-U  
ARGD014GLEH-U / ARGD018GLEH-U / ARGD024GLEH-U  
ARGD007GTEH-U / ARGD009GTEH-U / ARGD012GTEH-U  
ARGD014GTEH-U / ARGD018GTEH-U / ARGD024GTEH-U

Slim  
Concealed  
Floor



ARGD007/009/012/014GLEH-U  
ARGD007/009/012/014GTEH-U



ARGD018GLEH-U  
ARGD018GTEH-U



ARGD024GLEH-U  
ARGD024GTEH-U


Specifications

Model name		ARGD007GLEH-U ARGD007GTEH-U	ARGD009GLEH-U ARGD009GTEH-U	ARGD012GLEH-U ARGD012GTEH-U	ARGD014GLEH-U ARGD014GTEH-U	ARGD018GLEH-U ARGD018GTEH-U	ARGD024GLEH-U ARGD024GTEH-U
Power source		Single phase, 230V, ~50/60Hz					
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6
Input power		W	44	50	54	92	83
Airflow rate	High	m³/h (l/s)	550 (153)	600 (167)	600 (167)	800 (222)	940 (261)
	Med-High		480 (133)	510 (142)	530 (147)	680 (189)	820 (228)
	Med		440 (122)	460 (128)	490 (136)	600 (167)	730 (203)
	Med-Low		410 (114)	420 (117)	450 (125)	520 (144)	630 (175)
	Low		370 (103)	370 (103)	410 (114)	440 (122)	540 (150)
Sound pressure level	Quiet	dB (A)	320 (89)	320 (89)	340 (94)	340 (94)	470 (131)
	High		0 to 90	0 to 90	0 to 90	0 to 90	0 to 50
	Med-High		25	25	25	25	25
	Med		28	29	30	34	35
	Med-Low		26	27	28	32	31
Static pressure range	Low	Pa	25	25	27	30	29
	Med-Low		24	24	26	28	27
	Low		22	22	24	25	24
	Med-Low		21	21	22	22	23
	Quiet		21	21	22	22	21
Dimensions (H × W × D)		mm	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 1,100 × 620
Weight		kg(lbs)	17(37)	17(37)	18(40)	18(40)	22(49)
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	6.35
	Gas (Flare)	mm	9.52	9.52	12.70	12.70	15.88
Drain hose diameter (I.D./O.D.)			25 / 32				


Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts

Auto louvre grille kit: UTD-GXTA-W (for ARGD007 - 014)  
UTD-GXTB-W (for ARGD018)  
UTD-GXTC-W (for ARGD024)  
Remote sensor unit: UTY-XSZXZ1  
IR Receiver Unit: UTY-TRHX  
WLAN adapter: UTY-TFSXJ3  
External power supply unit: UTZ-GXXA, UTZ-GXXC

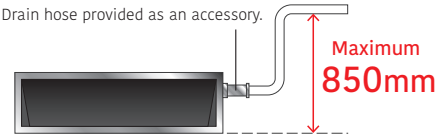


Dimensions (Unit: mm)

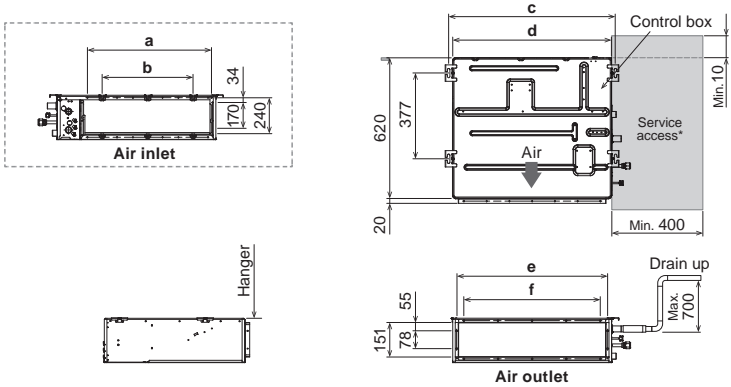

	ARGD007-014	ARGD018	ARGD024
a	574	774	974
b	P200x2=400	P200x3=600	P200x4=800
c	734	934	1,134
d	700	900	1,100
e	650	850	1,050
f	P100x6=600	P100x8=800	P100x10=1,000

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.






Medium Static Pressure Duct




Slim & Compact design

The slim and compact design of the indoor unit, with the control box mounted on the side of the unit, allows installation in narrow spaces.

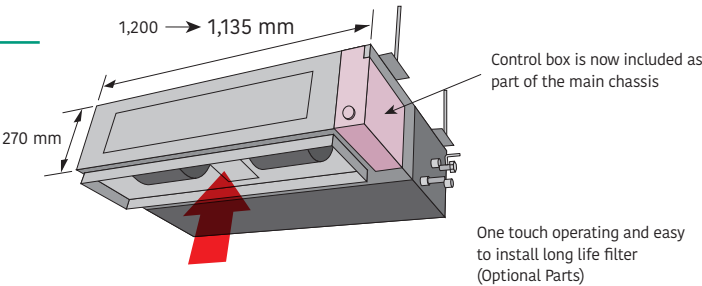


Easy maintenance

See below for the case of rear suction type

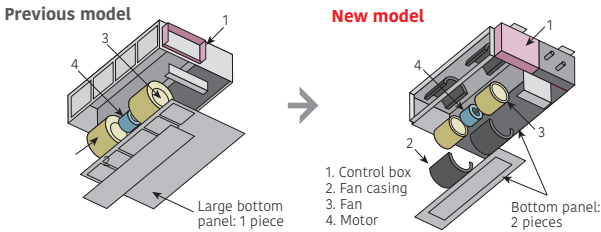


Structural improvement is attained by making the bottom panel two pieces, front and rear. The internal fan casing is also manufactured in two pieces, namely upper and lower. The maintenance of the motor and fan can be easily carried out by removing the rear panel and the lower part of the casing while leaving the main chassis installed.

Installation styles

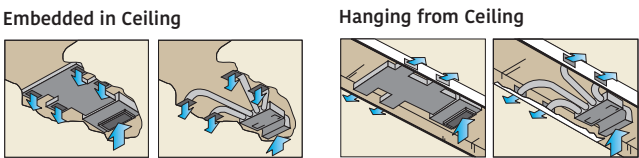

Two-direction drain piping



Easy setting by using remote controller

The change of static pressure range is possible by remote controller



Selectable with a wide range of static pressure

It is possible to change of static pressure range 0 to 150 Pa.

Static pressure range  
**0 to 150 Pa**

Model: ARG024GLEH-U / ARG030GLEH-U  
ARG036GLEH-U / ARG045GLEH-U  
ARG024GTEH-U / ARG030GTEH-U  
ARG036GTEH-U / ARG045GTEH-U



Specifications


Model name		ARG024GLEH-U ARG024GTEH-U	ARG030GLEH-U ARG030GTEH-U	ARG036GLEH-U ARG036GTEH-U	ARG045GLEH-U ARG045GTEH-U
Power source		Single phase, 220-240V, 50Hz			
Capacity	Cooling	kW	7.1	9.0	11.2
Input power		W	94	108	194
Airflow rate	High	m³/h (l/s)	1,280 (356)	1,410 (392)	1,840 (511)
	Med-High		1,180 (328)	1,350 (375)	1,750 (486)
	Med		1,090 (303)	1,280 (356)	1,660 (461)
	Med-Low		1,000 (278)	1,240 (344)	1,600 (444)
	Low		920 (256)	1,190 (331)	1,530 (425)
	Quiet		840 (233)	1,150 (319)	1,470 (408)
Static pressure range		Pa	0 to 150	0 to 150	0 to 150
Standard static pressure			40	50	60
Sound pressure level	High	dB (A)	31	34	37
	Med-High		29	33	36
	Med		27	32	35
	Med-Low		26	31	35
	Low		24	30	34
	Quiet		23	29	33
Dimensions (H × W × D)		mm	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700
Weight		kg(lbs)	36(79)	40(88)	40(88)
Connection pipe diameter	Liquid (Flare)	mm	9.52	9.52	9.52
	Gas (Flare)		15.88	15.88	15.88
Drain hose diameter (I.D./O.D.)			25 / 32		

Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts

Remote Sensor Unit : UTY-XSZXZ1  
Long Life Filter : UTD-LF25NA  
Flange (Square) : UTD-SF045T  
Flange (Round) : UTD-RF204  
IR Receiver Unit : UTY-TRHX, UTB-YWC  
Drain Pump Unit : UTZ-PX1NBA  
External power supply unit: UTZ-GXXA, UTZ-GXXC  
WLAN adapter: UTY-TFSXJ3

Dimensions (Unit: mm)

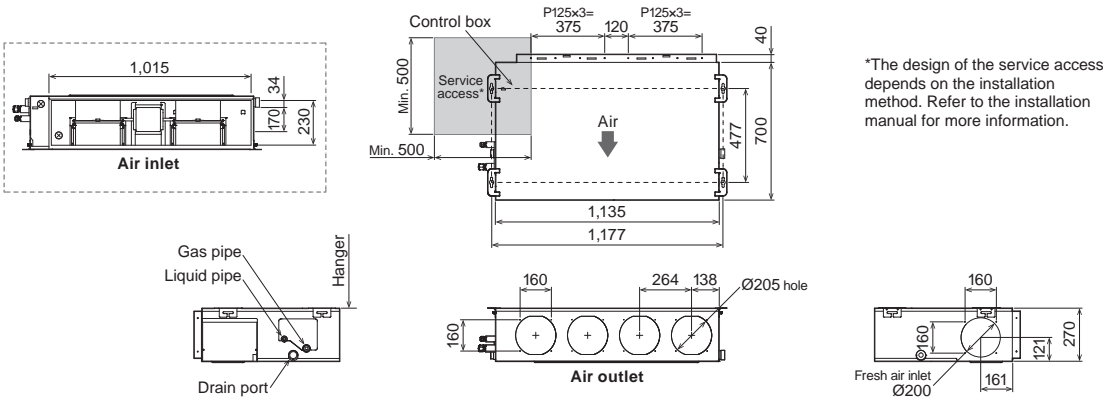

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.



High Static Pressure Duct




Static pressure mode selection

The use of a DC fan motor makes it possible to adjust the static pressure between 0 to 200 Pa (ARGC036) / 250Pa (ARGC045/060) / 300 Pa (ARGC072/090/096)



Easy installation (Compact size & Lightweight)


The indoor unit is designed to be compact and light by reducing the basic chassis size and the overall material weight.

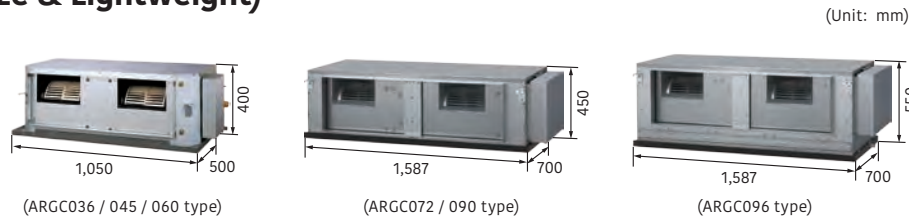

Low noise


Models : ARGC036

Cutting off the corners of the conventional indoor unit front panel and fan casing, has enabled less turbulent air flow. Low noise is realized by adopting a plastic case and a plastic fan.




ARGC036GTEH-U : Plastic fan [42dB(A)]

\* Model : Material  
(At 100 Pa : Actual noise measurement value)

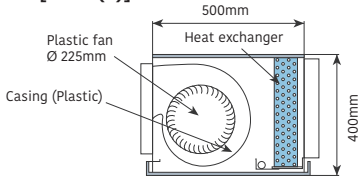

Low energy consumption by high efficiency DC fan motor

Improved motor efficiency from previous model.

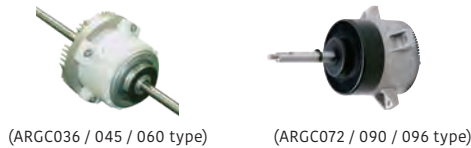

Model: ARGC036GTEH-U / ARGC045GTEH-U / ARGC060GTEH-U  
ARGC072GTEH-U / ARGC090GTEH-U  
ARGC096GTEH-U



Specifications

Model name			ARGC036GTEH-U	ARGC045GTEH-U	ARGC060GTEH-U	ARGC072GTEH-U	ARGC090GTEH-U	ARGC096GTEH-U
Power source			Single phase, 230 V, ~50/60 Hz					
Capacity	Cooling	kW	11.2	12.5	18.0	22.4	25.0	28.0
Input power		W	207	715	730	681	819	838
Airflow rate	High	m³/h (l/s)	1,990 (553)	3,500 (972)	3,500 (972)	3,900 (1,083)	4,300 (1,195)	4,850 (1,347)
	Med		1,680 (467)	3,000 (833)	3,000 (833)	3,300 (917)	4,000 (1,111)	4,250 (1,181)
	Low		1,330 (369)	2,460 (683)	2,460 (683)	3,000 (833)	3,500 (972)	3,600 (1,000)
Static pressure range		Pa	0 to 200	100 to 250	100 to 250	0 to 300	0 to 300	0 to 300
Standard static pressure			100	100	100	150	150	150
Sound pressure level	High	dB (A)	42	49	49	47	48	48
	Med		36	45	45	43	46	45
	Low		32	42	42	40	44	42
Dimensions (H × W × D)		mm	400 × 1,050 × 500	400 × 1,050 × 500	400 × 1,050 × 500	450 × 1,587 × 700	450 × 1,587 × 700	550 × 1,587 × 700
Weight		kg(lbs)	40(88)	46(101)	46(101)	84(185)	84(185)	105(232)
Connection pipe diameter	Liquid (Flare)	mm	9.52	9.52	9.52	9.52	9.52	9.52
	Gas (Flare)		15.88	15.88	15.88	19.05	19.05	22.22
Drain hose diameter (I.D./O.D.)			25 / 32					


Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts


Long-Life Filter: UTD-LF60KA (for 036/045/060) Remote sensor unit: UTY-XSZXZ1 External power supply unit: UTZ-GXXA, UTZ-GXXC (For 036/096)  
IR Receiver Unit: UTY-TRHX WLAN adapter: UTY-TFSXJ3

Dimensions (Unit: mm)

Models: ARGC036 / ARGC045 / ARGC060

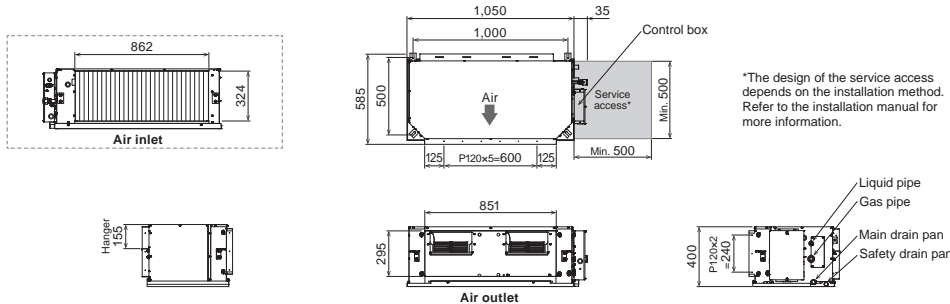

Models: ARGC072 / ARGC090 / ARGC096

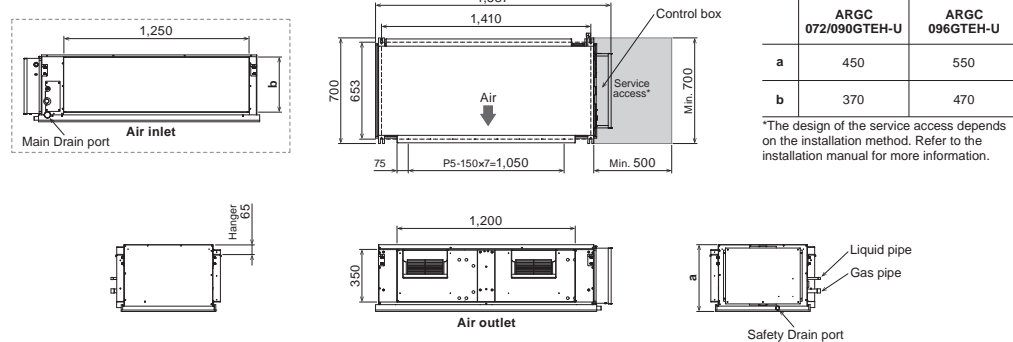



Floor/Ceiling



Flexible installation

Example for floor installation

Floor console




Example for ceiling installation

Under ceiling



Double auto swing

A combination of up/down and right/left directional swing allows three-dimensional air direction control.

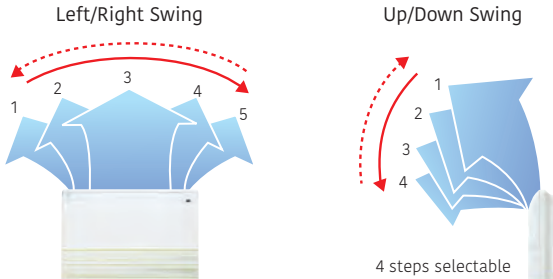


High power DC fan motor

- High power
- Wide rotation range
- High efficiency



Compact design

Symmetrical, slim and compact design.



Model: ABGA012GTEH-U / ABGA014GTEH-U  
ABGA018GTEH-U / ABGA024GTEH-U

Floor  
standing



Specifications


Model name			ABGA012GTEH-U	ABGA014GTEH-U	ABGA018GTEH-U	ABGA024GTEH-U
Power source			Single phase, 230V, ~50/60Hz			
Capacity	Cooling	kW	3.6	4.5	5.6	7.1
Input power		W	30	42	74	99
Airflow rate	High	m³/h (l/s)	660 (183)	780 (217)	1,000 (278)	1,000 (278)
	Med-High		620 (172)	740 (206)	910 (253)	930 (258)
	Med		580 (161)	690 (192)	830 (231)	870 (242)
	Med-Low		550 (153)	640 (178)	750 (208)	800 (222)
	Low		520 (144)	600 (167)	660 (183)	740 (206)
	Quiet		490 (136)	550 (153)	580 (161)	680 (189)
Sound pressure level	High	dB (A)	36	40	46	47
	Med-High		34	39	44	45
	Med		33	38	42	43
	Med-Low		31	36	40	41
	Low		29	35	37	39
	Quiet		28	34	35	37
Dimensions (H × W × D)		mm	199 × 990 × 655	199 × 990 × 655	199 × 990 × 655	199 × 990 × 655
Weight		kg(lbs)	25(55)	26(57)	26(57)	27(60)
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	9.52
	Gas (Flare)		12.70	12.70	12.70	15.88
Drain hose diameter (I.D./O.D.)			25 / 32			

Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts

Remote sensor unit: UTY-XSZXZ1  
External power supply unit: UTZ-GXXA, UTZ-GXXC  
WLAN adapter: UTY-TFSXJ3

Dimensions (Unit: mm)

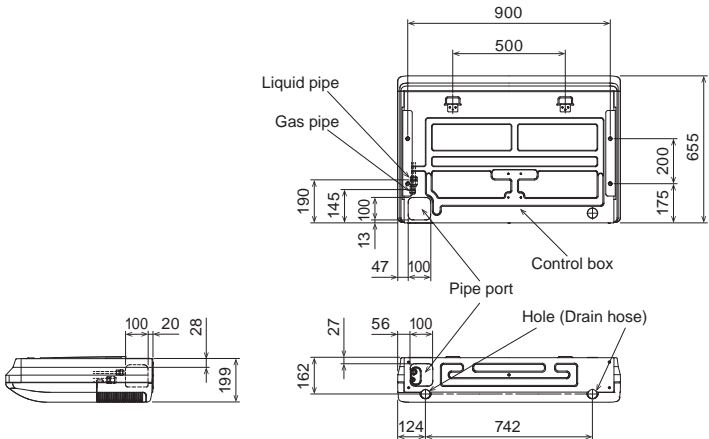



Ceiling



Installation

Open

General installation pattern which suspends the indoor unit from the ceiling.

Concealed


Installation pattern where part of the indoor unit is embedded into the ceiling.

Wall mounted (Field Supplied)

Installation which fixes the indoor unit to the wall by the use of wall brackets (Field supplied). This type of installation can be used when the ceiling space is insufficient.

Double auto swing and wide airflow

Auto airflow direction and auto swing

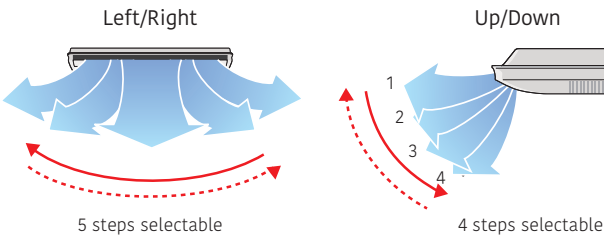


High power DC fan motor

- High power
- Wide rotation range
- High efficiency




Long airflow


Long Airflow ensures comfort to every corner of a large room.



Fresh air intake



Slim & Compact design



Model: ABGA030GTEH-U / ABGA036GTEH-U  
ABGA045GTEH-U / ABGA054GTEH-U




Specifications

Model name			ABGA030GTEH-U	ABGA036GTEH-U	ABGA045GTEH-U	ABGA054GTEH-U
Power source			Single phase, 230V, ~50/60Hz			
Capacity	Cooling	kW	9.0	11.2	12.5	14.0
Input power		W	66	85	131	180
Airflow rate	High	m³/h (l/s)	1,630 (453)	1,690 (469)	2,010 (558)	2,270 (631)
	Med-High		1,520 (422)	1,560 (433)	1,840 (511)	2,070 (575)
	Med		1,420 (394)	1,450 (403)	1,690 (469)	1,860 (517)
	Med-Low		1,320 (367)	1,360 (378)	1,530 (425)	1,660 (461)
	Low		1,220 (339)	1,270 (353)	1,380 (383)	1,470 (408)
	Quiet		1,140(317)	1,170(325)	1,230(342)	1,280(356)
Sound pressure level	High	dB (A)	42	45	48	51
	Med-High		40	41	46	49
	Med		39	39	45	46
	Med-Low		37	38	41	43
	Low		35	36	38	40
	Quiet		33	34	35	36
Dimensions (H × W × D)		mm	240 × 1,660 × 700	240 × 1,660 × 700	240 × 1,660 × 700	240 × 1,660 × 700
Weight		kg(lbs)	46(101)	48(106)	48(106)	48(106)
Connection pipe diameter	Liquid (Flare)	mm	9.52	9.52	9.52	9.52
	Gas (Flare)		15.88	15.88	15.88	15.88
Drain hose diameter (I.D./O.D.)			25 / 32			


Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts

Drain Pump Unit: UTR-DPB24T  
Flange: UTD-RF204  
External power supply unit: UTZ-GXXA, UTZ-GXXC  
WLAN adapter: UTY-TFSXJ3

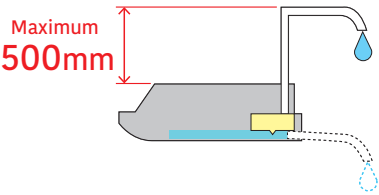

Dimensions (Unit: mm)

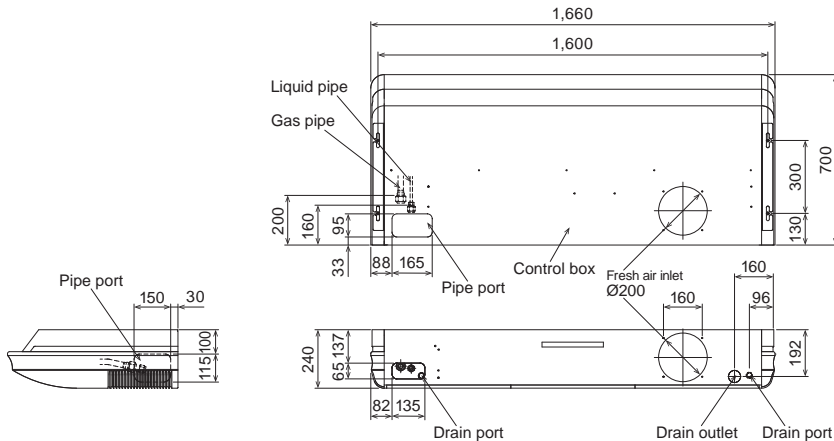



Wall-mounted type




Highly-efficiency, compact design

The 004-014 models share the same design. The high-density and large heat exchanger achieves a highly-efficiency and compact design. The compact body blends in well with conference rooms and offices, providing comfortable air conditioning.

High-density heat exchanger



**Slim tube design: 5 mm**  
Greater heat-exchanging capacity is achieved through the use of a high-density heat exchanger and a sub-heat exchanger.

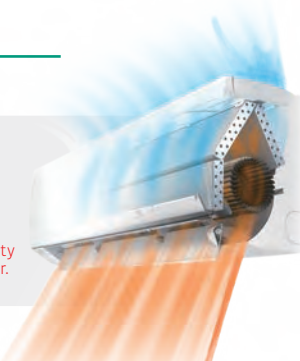


More comfortable airflow

The unique power diffuser provides comfortable air conditioning.

Heating

The vertical airflow provides powerful floor-level heating.




Cooling

The left/right airflow avoids blowing cool air directly at the occupants in a room.



Quiet operation & 6-Step fan speed control

The airflow pattern achieves significant noise reduction. Multistep airflow adjustment to suit the environment



- 6-Step Speed
- High
  - Med-High
  - Med
  - Med-Low
  - Low
  - Quiet


\* Remote controller is compatible with the following:  
UTY-RVRG / UTY-RNRGZ5 / UTY-RLRG / UTY-RSRG / UTY-RHRG / UTY-DCGGZ3 / UTY-ALGXZ1 / UTY-APGXZ1



The Human sensor contributes to further energy savings.

Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

\* If you want to use the 'Occupancy sensor control' function, you need an setting device that can set the 'Occupancy sensor control' function. For example: Wired RC (Touch panel).

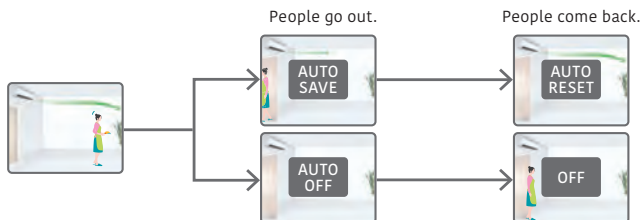

Model: ASGA007GCGH-U / ASGA009GCGH-U  
ASGA012GCGH-U / ASGA014GCGH-U  
[external EEV]  
ASGE007GCEH-U / ASGE009GCEH-U  
ASGE012GCEH-U / ASGE014GCEH-U



Specifications


Model name			ASGA007GCGH-U	ASGA009GCGH-U	ASGA012GCGH-U	ASGA014GCGH-U	ASGE007GCEH-U	ASGE009GCEH-U	ASGE012GCEH-U	ASGE014GCEH-U
Power source			Single phase, 230V, ~50/60Hz							
Capacity	Cooling	kW	2.2	2.8	3.6	4.0	2.2	2.8	3.6	4.0
Input power		W	16	20	25	36	16	20	25	36
Airflow rate	High	m³/h (l/s)	550 (153)	610 (169)	690 (192)	800 (222)	550 (153)	610 (169)	690 (192)	800 (222)
	Med-High		510 (142)	560 (156)	610 (169)	740 (206)	510 (142)	560 (156)	610 (169)	740 (206)
	Med		470 (131)	510 (142)	560 (156)	680 (189)	470 (131)	510 (142)	560 (156)	680 (189)
	Med-Low		410 (114)	440 (122)	530 (147)	610 (169)	410 (114)	440 (122)	530 (147)	610 (169)
	Low		360 (100)	360 (100)	470 (131)	550 (153)	360 (100)	360 (100)	470 (131)	550 (153)
	Quiet		310 (86)	310 (86)	330 (92)	330 (92)	310 (86)	310 (86)	330 (92)	330 (92)
Sound pressure level	High	dB (A)	34	37	40	44	34	37	40	44
	Med-High		32	35	37	42	32	35	37	42
	Med		30	32	35	40	30	32	35	40
	Med-Low		28	29	33	37	28	29	33	37
	Low		26	26	30	34	26	26	30	34
	Quiet		22	22	24	24	22	22	24	24
Dimensions (H × W × D)		mm	268 × 840 × 203	268 × 840 × 203	268 × 840 × 203	268 × 840 × 203	268 × 840 × 203	268 × 840 × 203	268 × 840 × 203	268 × 840 × 203
Weight		kg(lbs)	8.5(19)	8.5(19)	8.5(19)	8.5(19)	8.5(19)	8.5(19)	8.5(19)	8.5(19)
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35
	Gas (Flare)		9.52	9.52	12.70	12.70	9.52	9.52	12.70	12.70
Drain hose diameter (I.D./O.D.)			13.8/15.8 to 16.7				13.8/15.8 to 16.7			
EV kit (optional)			—				UTR-EV09XB		UTR-EV14XB	

Note: Specifications are subject to the following conditions:  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/15°CWB, and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V]  
When connecting ASH\*004G\*\*H, ASH\*007G\*\*H, ASH\*009G\*\*H to an outdoor unit other than the outdoor unit of the J-IVL series, the gas pipe diameter should be Ø12.70 mm.

Optional parts

External power supply unit: UTZ-GXXA, UTZ-GXXC  
Remote sensor unit: UTY-XSZXZ1  
WLAN adapter: UTY-TFSXJ3

Dimensions (Unit: mm)

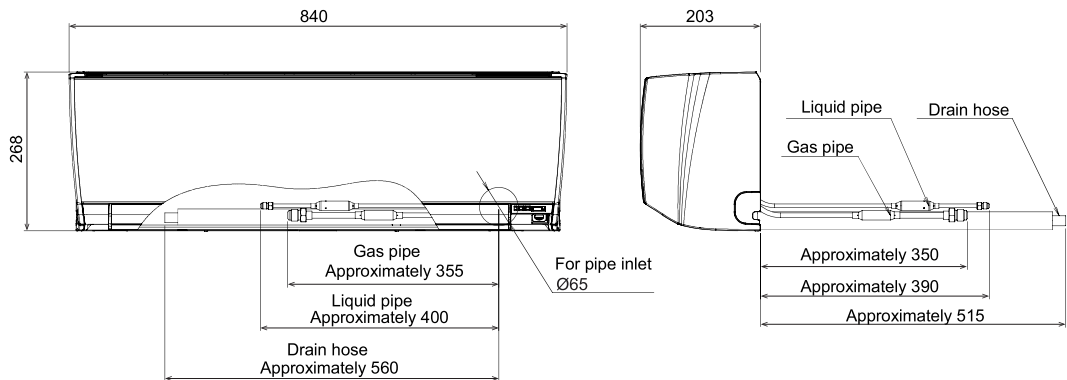




Wall-mounted type



Powerful & Comfort airflow


Powerful Airflow

(ASGA030GTEH-U)

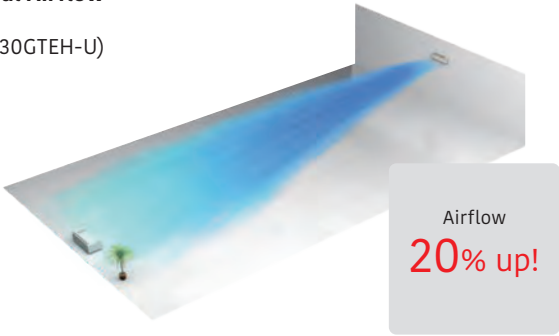

Power diffuser


(ASGA18/24GBCH-U)

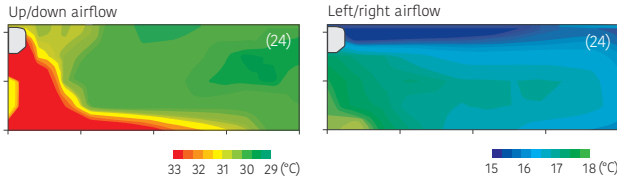

The Human sensor contributes to further energy savings (ASGA030/034GTEH-U only)


Energy saving operation starts automatically by detecting the motion of a person. Two modes of save operation mode and stop mode can be selected.

\* If you want to use the Human sensor control' function, you need an setting device that can set the Human sensor control' function. For example: Wired RC (Touch panel).

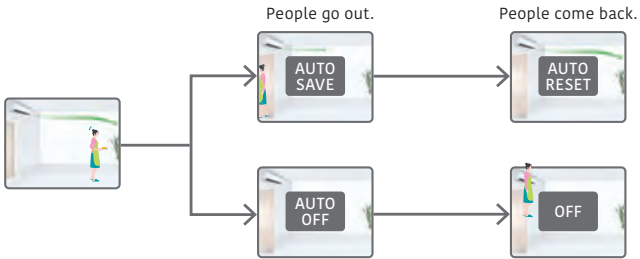

6-step fan speed control for quiet operation

The airflow pattern achieves significant noise reduction. A 6-step sound level setting allows for multiple-step silent operations.



- 6-Step Speed
- High
  - Med-High
  - Med
  - Med-Low
  - Low
  - Quiet



\* Remote controller is compatible with the following:  
UTY-RVRG / UTY-RNRGZ5 / UTY-RLRG / UTY-RSRG / UTY-RHRG / UTY-DCGGZ3 / UTY-ALGXZ1 / UTY-APGXZ1

Model: ASGA18GBCH-U / ASGA24GBCH-U

ASGA030GTEH-U / ASGA034GTEH-U



ASGA18/24GBCH-U



ASGA030/034GTEH-U

Specifications

Model name			ASGA18GBCH-U	ASGA24GBCH-U	ASGA030GTEH-U	ASGA034GTEH-U
Power source			Single phase, 230V, ~50/60Hz			
Capacity	Cooling	kW	5.6	7.1	9.0	10.0
Input power		W	32	60	74	103
Airflow rate	High	m³/h (l/s)	840 (233)	1,100 (306)	1,440 (400)	1,620 (450)
	Med-High		-	-	1,200 (333)	1,300 (361)
	Med		770 (214)	910 (253)	1,050 (292)	1,120 (311)
	Med-Low		-	-	940 (261)	980 (272)
	Low		690 (192)	730 (203)	890 (247)	890 (247)
	Quiet		-	-	700 (194)	700 (194)
Sound pressure level	High	dB (A)	41	48	53	55
	Med-High		-	-	49	51
	Med		39	43	45	47
	Med-Low		-	-	42	43
	Low		35	35	39	39
	Quiet		-	-	33	33
Dimensions (H × W × D)		mm	320 × 998 × 238	320 × 998 × 238	340 × 1,150 × 280	340 × 1,150 × 280
Weight		kg(lbs)	15(33)	15(33)	18(40)	18(40)
Connection pipe diameter	Liquid (Flare)	mm	6.35	9.52	9.52	9.52
	Gas (Flare)		12.70	15.88	15.88	15.88
Drain hose diameter (I.D./O.D.)			12/16		13.8/15.8 to 16.7	


Note: Specifications are subject to the following conditions:  
Cooling: Indoor temperature of 27°CDB/19°CWB, and outdoor temperature of 35°CDB/24°CWB.  
Heating: Indoor temperature of 20°CDB/(15°CWB), and outdoor temperature of 7°CDB/6°CWB.  
Pipe length: 7.5 m; Height difference between outdoor unit and indoor unit: 0 m. Voltage: 230 [V].  
When connecting ASHA18GBCH to an outdoor unit other than the outdoor unit of the J-IVL series, the pipe diameter should be Ø9.52/Ø15.88 mm (Liquid/Gas).

Optional parts


External power supply unit: UTZ-GXXA (030/034), UTZ-GXXC (030/034)  
Remote sensor unit: UTY-XSZXZ1  
WLAN adapter: UTY-TFSXJ3 (030/034)  
Silver Ion Filter: UTR-FA13-3

Dimensions (Unit: mm)

Models: ASGA18 / ASGA24

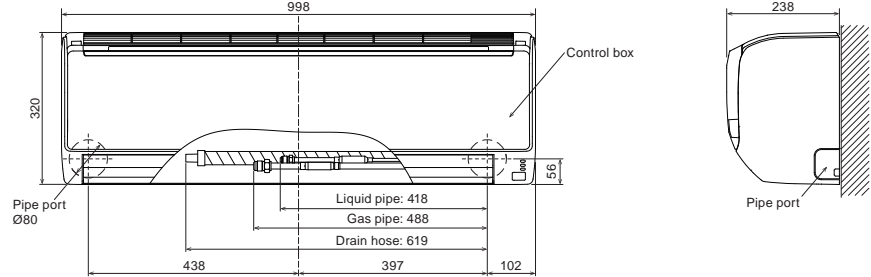

Models: ASGA030 / ASGA034

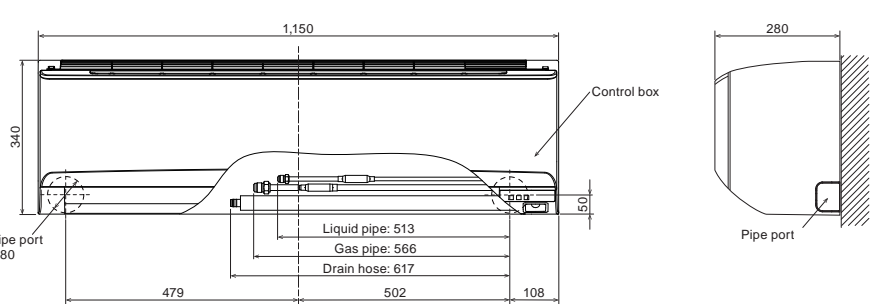

















































































# INDOOR UNITS LINE-UP for V-III Tropical and J-III Tropical

Comprehensive range of indoor units of variety design and capacity ranges available which can be selected to suit any air conditioning needs.  
13types, 85models, Capacity range from 7,000 Btu/h to 96,000 Btu/h

### Indoor units range

Capacity range		Btu/h	7,000	9,000	12,000	14,000	18,000	24,000	30,000	34,000	36,000	45,000	54,000	60,000	72,000	90,000	96,000
		kW	2.2	2.8	3.6	4.5	5.6	7.1	9.0	10.0	11.2	12.5	14.0	18.0	22.4	25.0	28.0
Cassette	Compact Cassette	 AUGB07GALH AUGB07GATH	 AUGB09GALH AUGB09GATH	 AUGB12GALH AUGB12GATH	 AUGB14GALH AUGB14GATH	 AUGB18GALH AUGB18GATH	 AUGB24GALH AUGB24GATH										
	4-way Flow	(Slim type)					 AUGD18GALH	 AUGD24GALH									
		(Large type)					 AUGA18GALH	 AUGA24GALH	 AUGA30GALH		 AUGA36GALH	 AUGA45GALH	 AUGA54GALH				
	Circular Flow	(Slim type)					 AUGM018GTAH	 AUGM024GTAH									
		(Large type)					 AUGK018GTAH	 AUGK024GTAH	 AUGK030GTAH	 AUGK034GTAH	 AUGK036GTAH	 AUGK045GTAH	 AUGK054GTAH				
Duct	Mini Duct (With drain pump)	 ARGK07GCLH	 ARGK09GCLH	 ARGK12GCLH	 ARGK14GCLH	 ARGK18GCLH	 ARGK24GCLH										
	Mini Duct (Without drain pump)	 ARGK07GALH	 ARGK09GALH	 ARGK12GALH	 ARGK14GALH	 ARGK18GALH	 ARGK24GALH										
	Slim Duct (With drain pump)	 ARGD07GATH	 ARGD09GATH	 ARGD12GATH	 ARGD14GATH	 ARGD18GATH	 ARGD24GATH										
	Medium Static Pressure Duct						 ARGA24GBTH		 ARGA30GBTH		 ARGA36GBTH	 ARGA45GBTH					
	High Static Pressure Duct										 ARGC36GBTH				 ARGC72GBTH*1	 ARGC90GBTH*1	 ARGC96GATH*1
												 ARGC45GATH		 ARGC60GATH*1	 ARGC72GATH*1	 ARGC90GATH*1	
Floor	Floor (Same as Ceiling models)			 ABGA12GATH	 ABGA14GATH	 ABGA18GATH	 ABGA24GATH										
	Slim Concealed Floor (Same as Slim Duct models)	 ARGD07GATH	 ARGD09GATH	 ARGD12GATH	 ARGD14GATH	 ARGD18GATH	 ARGD24GATH										
Ceiling	Ceiling			 ABGA12GATH	 ABGA14GATH	 ABGA18GATH	 ABGA24GATH		 ABGA30GATH		 ABGA36GATH	 ABGA45GATH	 ABGA54GATH				
Wall Mounted	Wall Mounted	 ASGA07GACH ASGA07GATH	 ASGA09GACH ASGA09GATH	 ASGA12GACH ASGA12GATH	 ASGA14GACH ASGA14GATH	 ASGA18GACH ASGA18GATH	 ASGA24GACH ASGA24GATH		 ASGA30GACH ASGA30GATH								

\*1:ARGC60/72/90/96 cannot be connected to J-III tropical Series. \*2:Large Airflow Duct can be connected to V-III tropical Series only.






Compact  
Cassette

2-stage turbo fan

High efficiency design by 2 stage structure

An evenly spread air distribution across the heat exchanger is possible due to the new 2 stage turbo fan which produces two separate airflow streams.

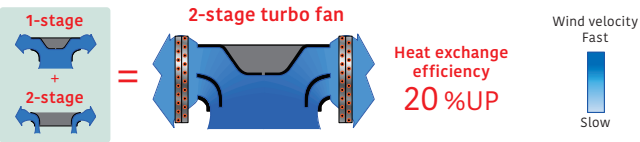


**Previous turbo fan**  
In the case of a previous fan, the air outlet range was narrow as the airflow moved to the motor side which meant the velocity of air passing through the heat exchanger was uneven.


Quiet quality

Optimization of wing form (laminar wing type) and wing number (7 blades each)

Designed by CFD-analysis (fluid) simulations

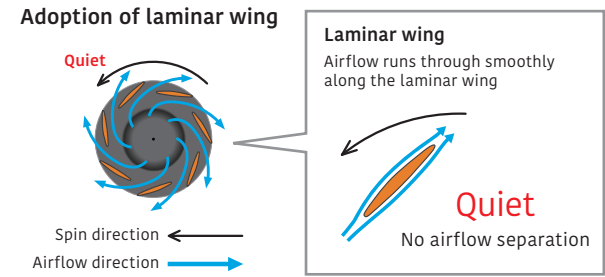

Improvement of the airflow distribution

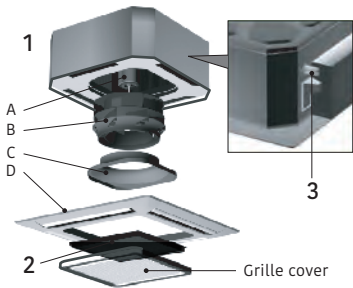

1. Maintenance of fan motor and fan

Maintenance of the fan motor and fan can be done easily after taking off the panel as the bell mouth of the fan can be removed easily.

A : Fan motor    B : 2-stage turbo fan  
C : Bell-mouth    D : Panel

2. Air filter : standard equipment

3. Adaptation of transparent drainage parts

During installation, maintenance and operation, the drain pump and kit can be checked easily.

High ceiling mode

The compact cassette can be installed up to a height of 3.0 m (12/14/18/24).

Model code	The maximum height from floor to ceiling (m)	
	Standard mode	High ceiling mode
07	2.7	-
09	2.7	-
12	2.7	3.0
14	2.7	3.0
18	2.7	3.0
24	2.7	3.0

Compact design

Worlds first 24,000 Btu model in the compact cassette category  
(Easy installation by taking off ceiling panel of 600 x 600 size)



**Model: AUGB07GALH / AUGB09GALH / AUGB12GALH  
AUGB14GALH / AUGB18GALH / AUGB24GALH  
AUGB07GATH / AUGB09GATH / AUGB12GATH  
AUGB14GATH / AUGB18GATH / AUGB24GATH**




Specifications

Model name		AUGB07GALH AUGB07GATH	AUGB09GALH AUGB09GATH	AUGB12GALH AUGB12GATH	AUGB14GALH AUGB14GATH	AUGB18GALH AUGB18GATH	AUGB24GALH AUGB24GATH
Power source		Single phase, 220-240V, 50Hz					
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6
	Heating		2.8	3.2	4.1	5.0	6.3
Input power		W	25	25	29	35	84
Airflow rate	High	m³/h (l/s)	540 (150)	550 (153)	600 (167)	680 (189)	710 (197)
	Med		450 (125)	450 (125)	530 (147)	590 (164)	580 (161)
	Low		350 (97)	350 (97)	390 (108)	390 (108)	400 (111)
Sound pressure level	High	dB (A)	34	35	37	38	41
	Med		30	30	34	34	35
	Low		25	25	27	27	27
Dimensions (H × W × D)		mm	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570	245 × 570 × 570
Weight		kg(lbs)	15 (33)	15 (33)	15 (33)	15 (33)	17 (37)
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	9.52
	Gas (Flare)		12.70	12.70	12.70	12.70	15.88
Drain hose diameter (I.D./O.D.)			25 / 32				
Cassette Grille	Model name		UTG-UFGC-W				
	Dimensions (H×W×D)		50 × 700 × 700				
	Weight		2.6 (6)				


Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts

Air Outlet Shutter Plate: UTR-YDZB  
Insulation Kit for High Humidity: UTZ-KXGC



Dimensions (Unit: mm)

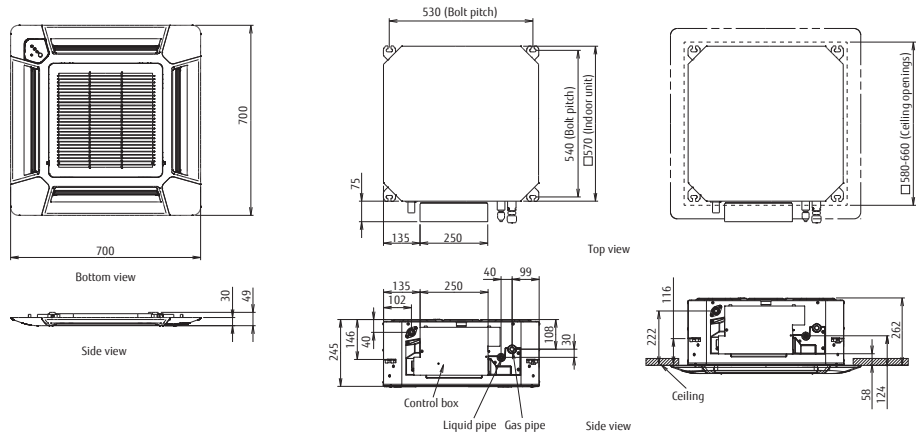





Cassette  
Slim type  
4-way Flow



High efficiency turbo fan with 3-dimensional blade




High efficiency airflow distribution has been achieved by the introduction of a 3 dimensional blade which increases the air passing over the heat exchanger.

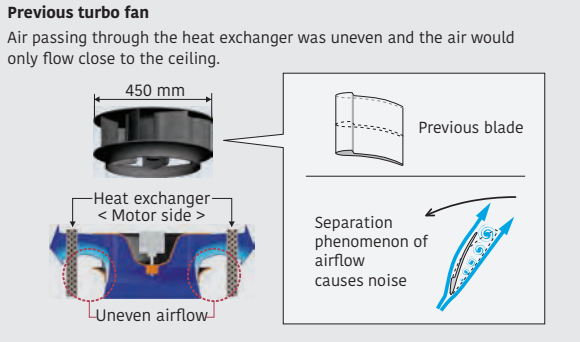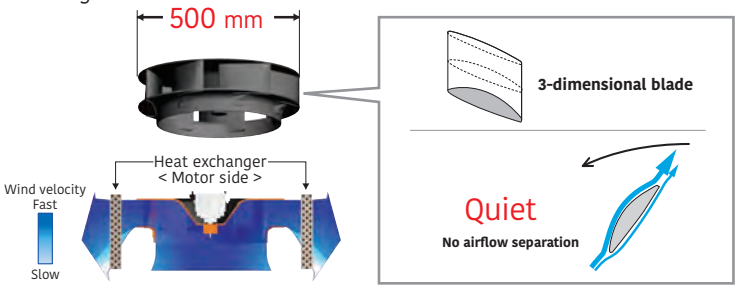


← : Spin direction → : Airflow direction → : Turbulent flow noise

Improvement of the airflow distribution

The louver design distributes air leaving a space between the chassis and the ceiling allowing far and wide air flow distribution.



Adjustment of hanger position is possible after installation

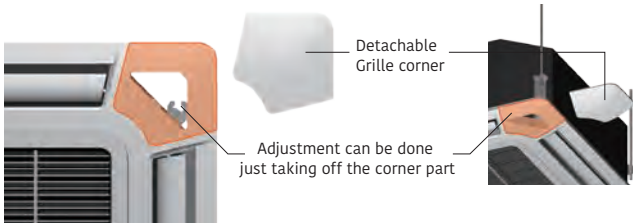

High ceiling mode

This cassette can be installed up to a height of 3.5 m.

Model code	The maximum height from floor to ceiling (m)	
	Standard mode	High ceiling mode
18	3.0	3.5
24	3.0	3.5

Model: AUGD18GALH / AUGD24GALH




Specifications

Model name			AUGD18GALH	AUGD24GALH
Power source			Single phase, 220-240V, 50Hz	
Capacity	Cooling	kW	5.6	7.1
	Heating		6.3	8.0
Input power		W	39	46
Airflow rate	High	m³/h (l/s)	1,150 (319)	1,280 (356)
	Med		940 (261)	1,040 (289)
	Low		870 (242)	870 (242)
Sound pressure level	High	dB (A)	36	38
	Med		30	33
	Low		29	29
Dimensions (H × W × D)		mm	246 × 840 × 840	246 × 840 × 840
Weight		kg(lbs)	22 (48)	22 (48)
Connection pipe diameter	Liquid (Flare)	mm	9.52	9.52
	Gas (Flare)		15.88	15.88
Drain hose diameter (I.D./O.D.)			25 / 32	
Model name			UTG-UGGA-W	
Cassette Grille	Dimensions (H×W×D)	mm	50 × 950 × 950	
	Weight	kg(lbs)	5.5 (12)	


Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts

IR Receiver Unit : UTY-LRHGB1  
Air Outlet Shutter Plate : UTR-YDZK  
Panel Spacer : UTG-BKXA-W  
Insulation Kit for High Humidity : UTG-KXRA  
UTG-AKXA-W UTG-AKXA-W



Dimensions (Unit: mm)

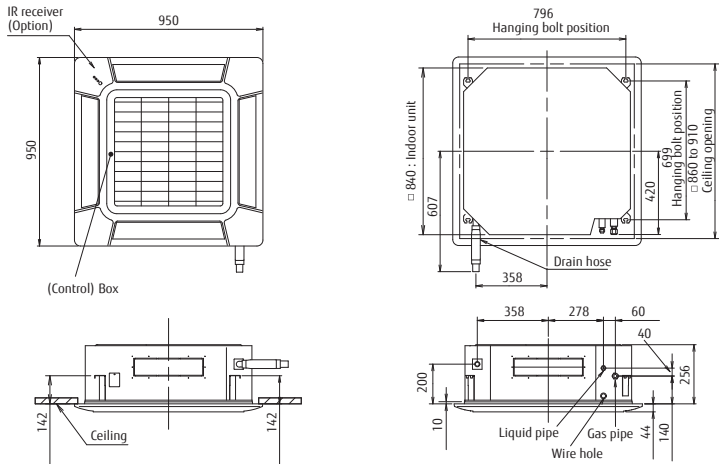




Cassette  
Large type  
4-way Flow




High efficiency turbo fan with 3-dimensional blade

High efficiency airflow distribution has been achieved by the introduction of a 3 dimensional blade which increases the air passing over the heat exchanger.

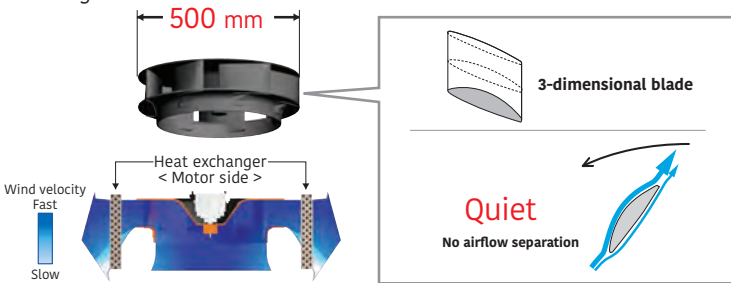

Previous turbo fan




Air passing through the heat exchanger was uneven and the air would only flow close to the ceiling.

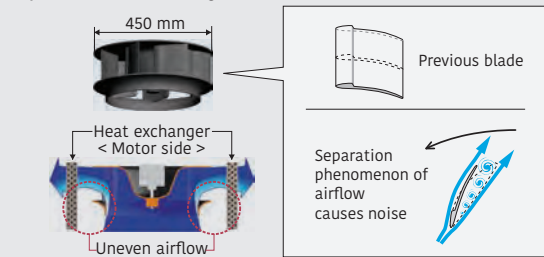


← : Spin direction → : Airflow direction → : Turbulent flow noise

Improvement of the airflow distribution

The louver design distributes air leaving a space between the chassis and the ceiling allowing far and wide air flow distribution.



Adjustment of hanger position is possible after installation

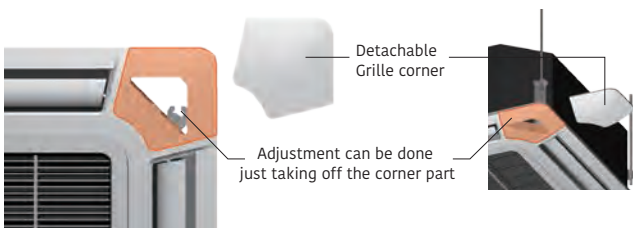

High ceiling mode

This cassette can be installed up to a height of 4.2 m (36/45/54).

Model code	The maximum height from floor to ceiling (m)	
	Standard mode	High ceiling mode
18	3.2	3.6
24	3.2	3.6
30	3.2	3.6
34	3.2	3.6
36	3.2	4.2
45	3.2	4.2
54	3.2	4.2

Model: AUGA18GALH / AUGA24GALH / AUGA30GALH  
AUGA36GALH / AUGA45GALH / AUGA54GALH



Specifications

Model name		AUGA18GALH	AUGA24GALH	AUGA30GALH	AUGA36GALH	AUGA45GALH	AUGA54GALH
Power source		Single phase, 220-240V, 50Hz					
Capacity	Cooling	5.6	7.1	9.0	11.2	12.5	14.0
	Heating	6.3	8.0	10.0	12.5	14.0	16.0
Input power		51	51	59	80	99	119
Airflow rate	High	1,420 (394)	1,420 (394)	1,600 (444)	1,800 (500)	1,900 (528)	2,000 (556)
	Med	1,230 (342)	1,230 (342)	1,300 (361)	1,300 (361)	1,370 (381)	1,370 (381)
	Low	1,100/1,000*1 (306/278)	1,100/1,000*1 (306/278)	1,100 (306)	1,100 (306)	1,100 (306)	1,100 (306)
Sound pressure level	High	40	40	40	44	46	47
	Med	36	36	38	38	39	39
	Low	33/31*1	33/31*1	33	33	33	33
Dimensions (H × W × D)		mm 288 × 840 × 840	mm 288 × 840 × 840	mm 288 × 840 × 840	mm 288 × 840 × 840	mm 288 × 840 × 840	mm 288 × 840 × 840
Weight		kg(lbs) 27 (59)	kg(lbs) 27 (59)	kg(lbs) 27 (59)	kg(lbs) 27 (59)	kg(lbs) 27 (59)	kg(lbs) 27 (59)
Connection pipe diameter	Liquid (Flare)	9.52	9.52	9.52	9.52	9.52	9.52
	Gas (Flare)	15.88	15.88	15.88	15.88	15.88	15.88
Drain hose diameter (I.D./O.D.)		25 / 32					
Cassette Grille		Model name UTG-UGGA-W					
Cassette Grille	Dimensions (H×W×D)	mm 50 × 950 × 950					
	Weight	kg(lbs) 5.5 (12)					


Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].


\*1: This value is under cooling operation.

Optional parts

IR Receiver Unit : UTY-LRHGB1  
Air Outlet Shutter Plate : UTR-YDZK  
Panel Spacer : UTG-BKXA-W  
Insulation Kit for High Humidity : UTG-KXRA  
UTG-AKXA-W UTG-AKXA-W

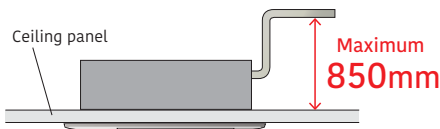

Dimensions (Unit: mm)

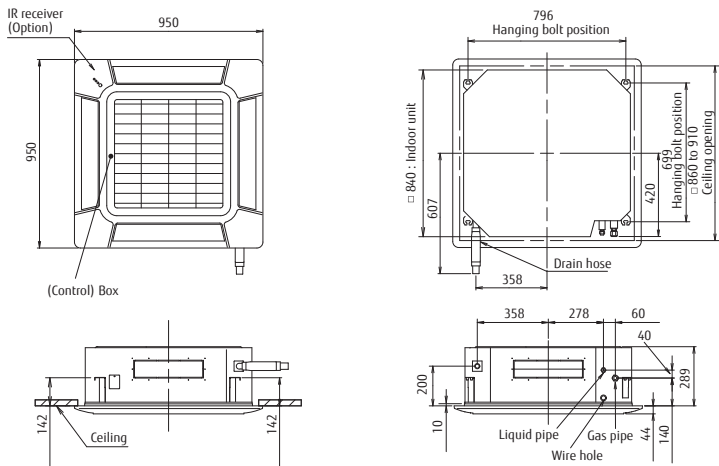




Cassette  
Slim/Large type  
Circular Flow



Unique Circular Flow design


New Cassette type realizes Circular Flow to blow large airflow in 360° direction by mounting high performance DC fan motor, new turbo fan and unique seamless airflow louver design.

Ø7 mm high density heat exchanger  
New DC fan motor  
High efficient turbo fan  
Seamless airflow louver

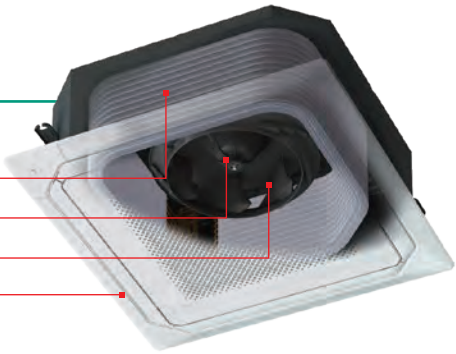

Uniform temperature air conditioning


Achieve a comfortable air conditioning spread to every corner of the room by circular flow & wide vertical airflow.

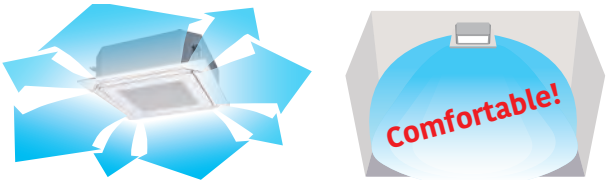


Individual louver control

Each louver can be set individually by Touch Panel Wired Remote Controller to enjoy the comfort of different directional airflows according to various room layouts.

\* Touch Panel Wired RC (UTY-RNRGZ5) and Central Remote Controller(UTY-DCGGZ3) only



Comfortable air conditioning by preventing direct blowing of cold air and by providing swinging air flow simultaneously.



Efficient air conditioning based on the room layout

Occupancy sensor increases more energy saving

Energy saving operation starts automatically by detecting the motion of a person. 2 modes of save operation mode and stop mode can be selected.

\* Touch Panel Wired RC (UTY-RNRGZ5) and Central Remote Controller(UTY-DCGGZ3) only



Human sensor (Optional)

2 modes can be selected

- Auto saving

Power is saved while people are away.
- Auto OFF

Operation stops after people go out.

Model: (Slim type)  
AUGM018GTAH / AUGM024GTAH  
(Large type)  
AUGK018GTAH / AUGK024GTAH / AUGK030GTAH  
AUGK034GTAH / AUGK036GTAH / AUGK045GTAH  
AUGK054GTAH



Specifications

Model name			AUGM018 GTAH	AUGM024 GTAH	AUGK018 GTAH	AUGK024 GTAH	AUGK030 GTAH	AUGK034 GTAH	AUGK036 GTAH	AUGK045 GTAH	AUGK054 GTAH
Power source			Single phase, 220-240V, 50Hz								
Capacity	Cooling	kW	5.6	7.1	5.6	7.1	9.0	10.0	11.2	12.5	14.0
	Heating		6.3	8.0	6.3	8.0	10.0	11.2	12.5	14.0	16.0
Input power		W	20	25	40	40	47	47	61	89	116
Airflow rate	High	m³/h (l/s)	1,050(292)	1,120(311)	1,420(394)	1,420(394)	1,440(400)	1,440(400)	1,620(450)	1,820(506)	2,040(567)
	Med-High		930(258)	1,050(292)	1,360(378)	1,360(378)	1,400(389)	1,400(389)	1,500(417)	1,590(442)	1,800(500)
	Med		900(250)	930(258)	1,300(361)	1,300(361)	1,340(372)	1,340(372)	1,400(389)	1,500(417)	1,590(442)
	Med-Low		870(242)	900(250)	1,270(353)	1,270(353)	1,300(361)	1,300(361)	1,340(372)	1,400(389)	1,440(400)
	Low		810(225)	870(242)	1,200(333)	1,200(333)	1,280(356)	1,280(356)	1,280(356)	1,300(361)	1,300(361)
	Quiet		780(217)	780(217)	1,150(319)	1,150(319)	1,150(319)	1,150(319)	1,150(319)	1,150(319)	1,150(319)
Sound pressure level	High	dB (A)	33	35	38	38	39	39	41	44	47
	Med-High		32	33	37	37	38	38	40	42	45
	Med		31	32	36	36	37	37	38	40	42
	Med-Low		30	31	35	35	36	36	37	38	39
	Low		29	30	34	34	35	35	36	36	36
Quiet		28	28	33	33	33	33	33	33	33	
Dimensions (H × W × D)		mm	246×840×840	246×840×840	288×840×840	288×840×840	288×840×840	288×840×840	288×840×840	288×840×840	288×840×840
Weight		kg(lbs)	24(53)	24.5(54)	26.5(58)	26.5(58)	29.5(65)	29.5(65)	29.5(65)	29.5(65)	29.5(65)
Connection pipe diameter	Liquid (Flare)	mm	6.35	9.52	6.35	9.52	9.52	9.52	9.52	9.52	9.52
	Gas (Flare)		12.70	15.88	12.70	15.88	15.88	15.88	15.88	15.88	15.88
Drain hose diameter (I.D./O.D.)			25 / 32								
Cassette Grille	Model name		UTG-UKGD-W/UTG-UKGA-B								
	Dimensions (H×W×D)		mm	53×950×950							
	Weight		kg(lbs)	6(13)							

Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].


When AUG\*018GTAH is connected to the outdoor unit other than J-III, pipe diameter should be Ø9.52/Ø15.88 (Liq/Gas)  
When AUXK036GTAH is connected to the outdoor unit other than J-III, gas pipe diameter should be Ø19.05.

Optional parts


Human Sensor Kit: UTY-SHZXC  
Wide Panel: UTG-AKXA-W  
Panel Spacer: UTG-BKXA-W  
Cassette Grille: UTG-UKGD-W  
UTG-UKGA-B  
IR Receiver Unit: UTY-LBHxD  
Air Outlet Shutter Plate: UTR-YDZK  
Insulation Kit for High Humidity: UTZ-KXRA

Dimensions (Unit: mm)

Models: AUGM018 / AUGM024

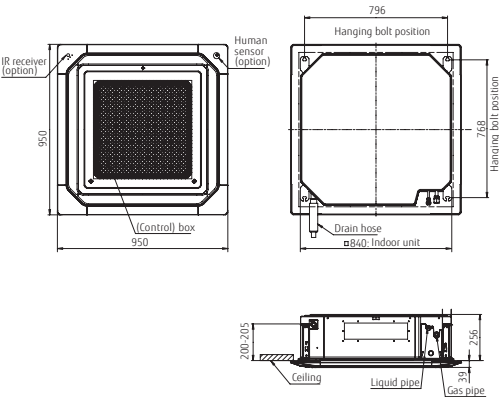

Models: AUGK018 / AUGK024 / AUGK030 / AUGK034  
AUGK036 / AUGK045 / AUGK054

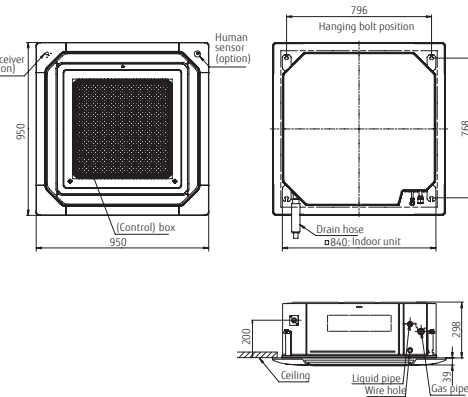




Mini Duct




Optimum design in harmony with interior decoration

Thin and short-depth body makes the clipped ceiling design

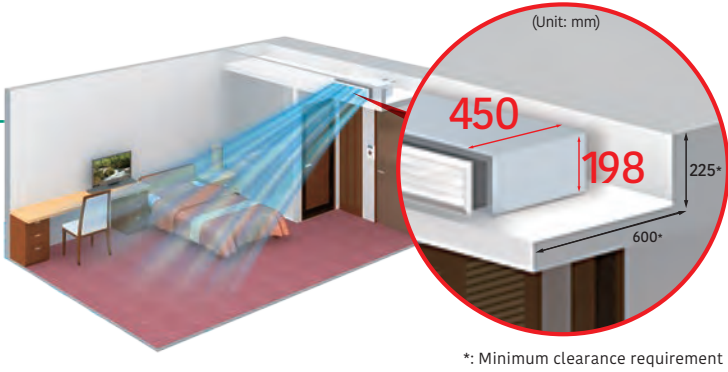


Advanced performance by new shaped heat exchanger and airflow

Air blower is improved so that velocity distribution is optimum in accordance with the heat exchanger shape. Wide range and uniform airflow can be received due to heat exchanger.

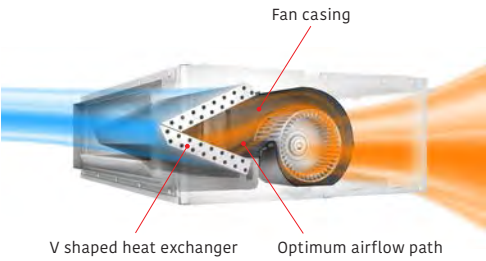

6-speed control\*


Multistep airflow speed control allows this model to install in a quiet location.

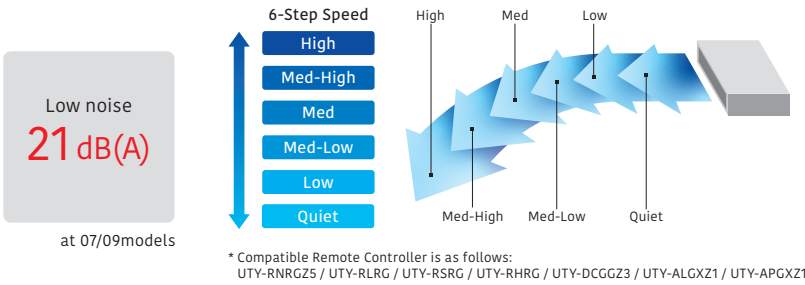


Easy drain design even at narrow ceiling

**Models with drain pump:**  
Drainage to the distant drain port is possible.

**Models without drain pump:**  
Both sides drainage is possible.




For models with drain pump, drain design is easy even at narrow ceiling.



For models without drain pump, both sides drainage is possible and drain design is easy.

**Model: (With drain pump)**  
ARGK07GCLH / ARGK09GCLH  
ARGK12GCLH / ARGK14GCLH  
ARGK18GCLH / ARGK24GCLH

**(Without drain pump)**  
ARGK07GALH / ARGK09GALH  
ARGK12GALH / ARGK14GALH  
ARGK18GALH / ARGK24GALH

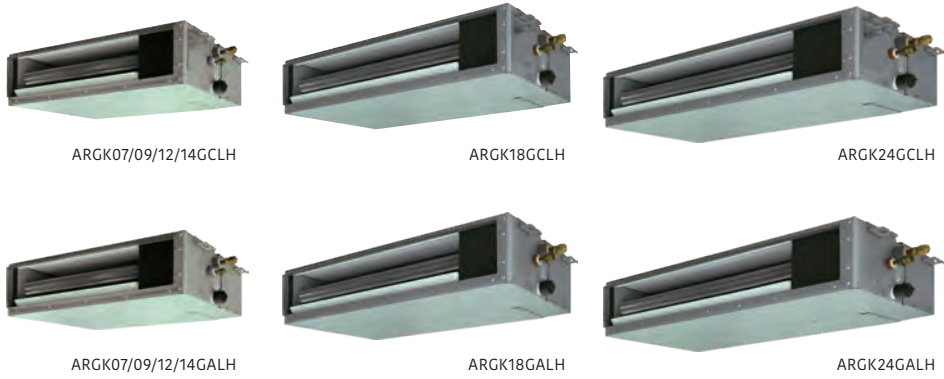

Specifications

Model name			ARGK07GCLH ARGK07GALH	ARGK09GCLH ARGK09GALH	ARGK12GCLH ARGK12GALH	ARGK14GCLH ARGK14GALH	ARGK18GCLH ARGK18GALH	ARGK24GCLH ARGK24GALH	
Power source			Single phase, 220-240V, 50Hz						
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6	7.1	
	Heating		2.8	3.2	4.0	5.0	6.3	8.0	
Input power		GCLH / GALH	W	28 / 21	28 / 21	35 / 28	66 / 59	73 / 66	80 / 73
Airflow rate	High	m³/h (l/s)	460 (128)	460 (128)	550 (153)	760 (211)	930 (258)	1,160 (322)	
	Med-High		440 (122)	440 (122)	520 (144)	660 (183)	840 (233)	1,060 (294)	
	Med		420 (117)	420 (117)	480 (133)	560 (156)	740 (206)	960 (267)	
	Med-Low		400 (111)	400 (111)	450 (125)	490 (136)	640 (178)	860 (239)	
	Low		370 (103)	370 (103)	410 (114)	410 (114)	540 (150)	750 (208)	
	Quiet		340 (94)	340 (94)	340 (94)	340 (94)	470 (131)	610 (169)	
Static pressure range		Pa	0 to 30	0 to 30	0 to 30	0 to 50	0 to 50	0 to 50	
Standard static pressure			10	10	10	15	15		
Sound pressure level	High	dB (A)	26	26	29	34	33	32	
	Med-High		25	25	27	31	30	30	
	Med		24	24	26	28	28	28	
	Med-Low		23	23	25	26	26	27	
	Low		22	22	24	24	24	25	
	Quiet		21	21	22	22	22	22	
Dimensions (H × W × D)		mm	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 700 × 450	198 × 900 × 450	198 × 1,100 × 450	
Weight		GCLH / GALH	kg(lbs)	15.5 (34) / 15 (33)	15.5 (34) / 15 (33)	16 (35) / 15.5 (34)	16 (35) / 15.5 (34)	19 (42) / 18.5 (41)	22.5 (50) / 22 (49)
Connection		Liquid (Flare)	mm	6.35	6.35	6.35	6.35	9.52	9.52
pipe diameter		Gas (Flare)		12.70	12.70	12.70	12.70	15.88	15.88
Drain hose diameter (I.D./O.D.)				25 / 32					

Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts



Auto louvre grille kit: UTD-GXTA-W (for ARGK07 - 14)  
UTD-GXTB-W (for ARGK18)  
UTD-GXTC-W (for ARGK24)  
Remote Sensor Unit : UTY-XSZX  
IR Receiver Unit : IUTB-YWC

Auto Louver Grille Kit (Option)

- Thin design provides a comfortable living environment over a wide area.
- Automatic louver grille provides comfortable air conditioning all the way down to the floor and matches the interior design well. (Optional)



Dimensions (Unit: mm)

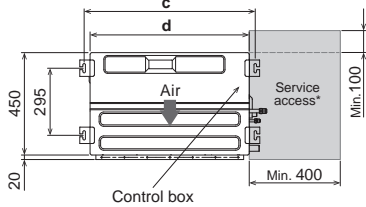

	ARGK07-14	ARGK18	ARGK24
a	575	775	975
b	P200x2=400	P200x3=600	P200x4=800
c	752	952	1,152
d	700	900	1,100
e	650	850	1,050
f	P100x6=600	P100x8=800	P100x10=1,000

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.




Slim Duct/  
Slim Concealed  
Floor  
(With drain pump)




Slim design

With a slim indoor design, this indoor can be installed in narrow ceiling spaces.

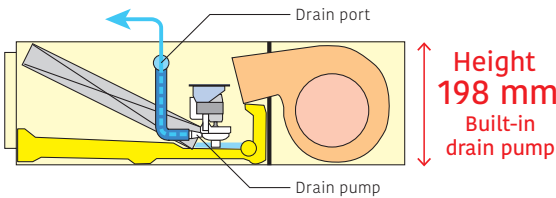


Air-intake

Air intake direction can be selected to match the installation site.

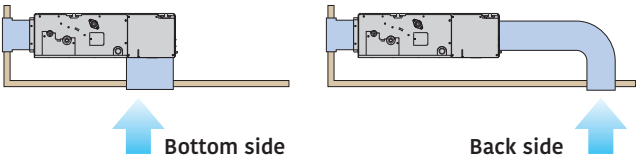


Flexible installation

Ceiling concealed

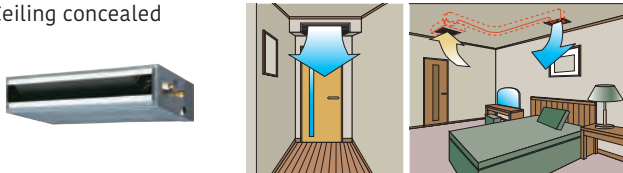

Floor concealed

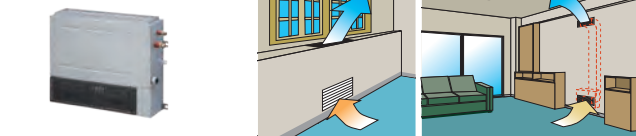

Selectable with a wide range of  
static pressure


By using DC fan motor, it is possible to change of static pressure range 0 to 90 Pa. The change of static pressure range is possible by remote controller.




Static pressure range  
**0 to 90 Pa**  
\*24 model is 0 to 50 Pa

Filter (Accessory)

ARGD07 / 09 / 12 / 14 / 18



ARGD24



Model: ARGD07GATH / ARGD09GATH / ARGD12GATH  
ARGD14GATH / ARGD18GATH / ARGD24GATH



ARGD07/09/12/14GATH



ARGD18GATH



ARGD24GATH

Slim  
Concealed  
Floor



Specifications


Model name			ARGD07GATH	ARGD09GATH	ARGD12GATH	ARGD14GATH	ARGD18GATH	ARGD24GATH
Power source			Single phase, 220-240V, 50Hz					
Capacity	Cooling	kW	2.2	2.8	3.6	4.5	5.6	7.1
	Heating		2.8	3.2	4.0	5.0	6.3	8.0
Input power		W	44	50	54	92	83	122
Airflow rate	High	m³/h (l/s)	550 (153)	600 (167)	600 (167)	800 (222)	940 (261)	1,330 (369)
	Med		490 (136)	550 (153)	510 (142)	710 (197)	840 (233)	1,240 (344)
	Low		440 (122)	480 (133)	450 (125)	610 (169)	750 (208)	1,100 (306)
Static pressure range		Pa	0 to 90	0 to 90	0 to 90	0 to 90	0 to 90	0 to 50
Standard static pressure			25	25	25	25	25	25
Sound pressure level	High	dB (A)	28	29	30	34	34	35
	Med		25	26	27	32	32	32
	Low		22	24	24	28	28	29
Dimensions (H × W × D)		mm	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 700 × 620	198 × 900 × 620	198 × 1,100 × 620
Weight		kg(lbs)	17 (37)	17 (37)	18 (40)	18 (40)	22 (48)	26 (57)
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35	9.52	9.52
	Gas (Flare)		12.70	12.70	12.70	12.70	15.88	15.88
Drain hose diameter (I.D./O.D.)			25 / 32					

Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].


Optional parts

Auto louvre grille kit: UTD-GXTA-W (for ARGD07 - 04)  
UTD-GXTB-W (for ARGD18)  
UTD-GXTC-W (for ARGD24)

Remote Sensor Unit : UTY-XSZX  
IR Receiver Unit : UTB-YWC

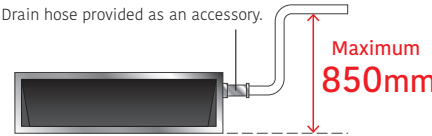


Dimensions (Unit: mm)

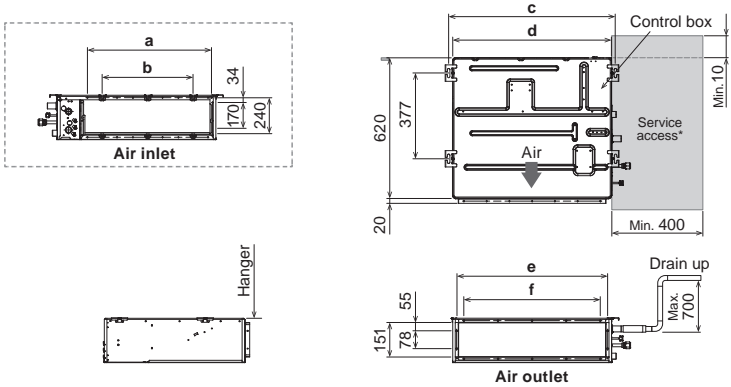

	ARGD07-14 GATH	ARGD18 GATH	ARGD24 GATH
a	574	774	974
b	P200x2=400	P200x3=600	P200x4=800
c	734	934	1,134
d	700	900	1,100
e	650	850	1,050
f	P100x6=600	P100x8=800	P100x10=1,000

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.






Medium Static Pressure Duct




Slim & Compact design

The slim and compact design of the indoor unit, with the control box mounted on the side of the unit, allows installation in narrow spaces.

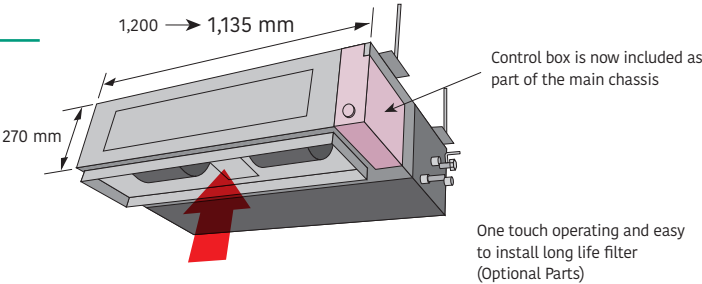


Easy maintenance

See below for the case of rear suction type

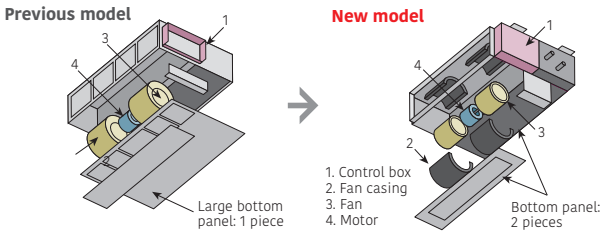


Structural improvement is attained by making the bottom panel two pieces, front and rear. The internal fan casing is also manufactured in two pieces, namely upper and lower. The maintenance of the motor and fan can be easily carried out by removing the rear panel and the lower part of the casing while leaving the main chassis installed.

Installation styles

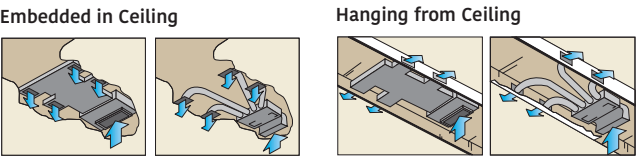

Two-direction drain piping



Easy setting by using remote controller

The change of static pressure range is possible by remote controller



Selectable with a wide range of static pressure

It is possible to change of static pressure range 0 to 150 Pa.

Static pressure range  
0 to 150 Pa

Model: ARG A24GBTH / ARG A30GBTH  
ARG A36GBTH / ARG A45GBTH



Specifications


Model name			ARG A24GBTH	ARG A30GBTH	ARG A36GBTH	ARG A45GBTH
Power source			Single phase, 220-240V, 50Hz			
Capacity	Cooling	kW	7.1	9.0	11.2	12.5
	Heating		8.0	10.0	12.5	14.0
Input power		W	94	108	194	240
Airflow rate	High	m³/h (l/s)	1,280 (356)	1,410 (392)	1,840 (511)	1,970 (547)
	Med		990 (275)	1,280 (356)	1,600 (444)	1,860 (517)
	Low		840 (233)	1,150 (319)	1,470 (408)	1,640 (456)
Static pressure range		Pa	30 to 150	30 to 150	30 to 150	30 to 150
Standard static pressure			100	100	100	100
Sound pressure level	High	dB (A)	31	34	37	41
	Med		27	32	35	38
	Low		23	29	33	36
Dimensions (H × W × D)		mm	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700	270 × 1,135 × 700
Weight		kg(lbs)	39 (86)	42 (93)	42 (93)	42 (93)
Connection pipe diameter	Liquid (Flare)	mm	9.52	9.52	9.52	9.52
	Gas (Flare)		15.88	15.88	19.05	19.05
Drain hose diameter (I.D./O.D.)			25 / 32			

Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts

Remote Sensor Unit : UTY-XSZX  
Long Life Filter : UTD-LF25NA  
Flange (Square) : UTD-SF045T  
Flange (Round) : UTD-RF204  
IR Receiver Unit : UTB-YWC  
Drain Pump Unit : UTZ-PX1NBA

Dimensions (Unit: mm)

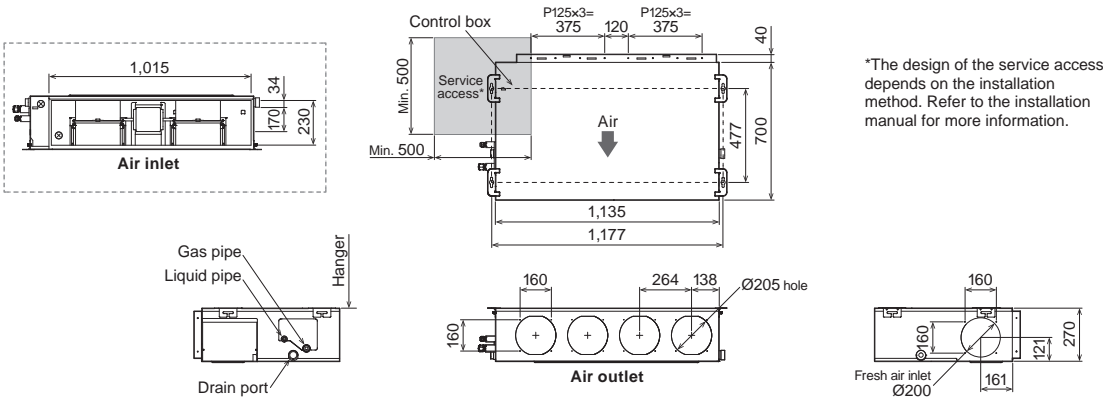

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.



High Static Pressure Duct




Static pressure selection

By using DC fan motor, it is possible to change static pressure range from 0 to 200 Pa (ARGC36) / 300 Pa (ARGC72 / 90 / 96).



Easy installation (Compact size & Lightweight)


A compact size and lightweight indoor unit has been developed by reducing the basic chassis and the overall material weight.

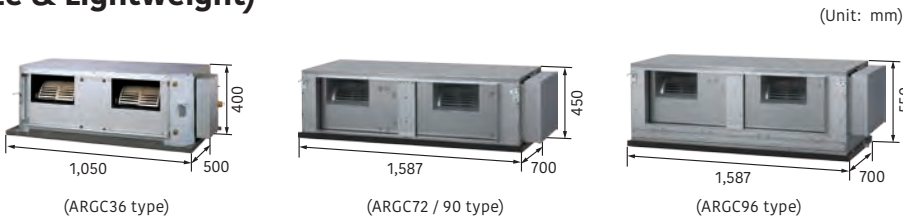

Low noise


Models : ARGC36

Cutting off the corners of the conventional indoor unit front panel and fan casing, has enabled less turbulent air flow. Low noise is realized by adopting a plastic case and a plastic fan.



ARGC36GBTH : Plastic fan [42dB(A)]

\* Model : Material  
(At 100 Pa : Actual noise measurement value)

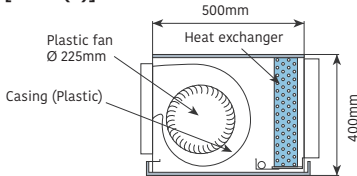

Low energy consumption by high efficiency DC fan motor

Improved motor efficiency from previous model.



(ARGC36 type)



(ARGC72 / 90 / 96 type)

Model: ARGC36GBTH

ARGC72GBTH / ARGC90GBTH

ARGC96GATH



ARGC36GBTH



ARGC72/90GBTH



ARGC96GATH

Specifications

Model name			ARGC36GBTH	ARGC72GBTH	ARGC90GBTH	ARGC96GATH
Power source			Single phase, 220-240V, 50Hz			
Capacity	Cooling	kW	11.2	22.4	25.0	28.0
	Heating		12.5	25.0	28.0	31.5
Input power		W	207	681	819	838
Airflow rate	High	m³/h (l/s)	1,990 (553)	3,900 (1,083)	4,300 (1,195)	4,850 (1,347)
	Med		1,680 (467)	3,300 (917)	4,000 (1,111)	4,250 (1,181)
	Low		1,330 (369)	3,000 (833)	3,500 (972)	3,600 (1,000)
Static pressure range		Pa	0 to 200	0 to 300	0 to 300	0 to 300
Standard static pressure			100	150	150	150
Sound pressure level	High	dB (A)	42	47	48	48
	Med		36	43	46	45
	Low		32	40	44	42
Dimensions (H × W × D)		mm	400 × 1,050 × 500	450 × 1,587 × 700	450 × 1,587 × 700	550 × 1,587 × 700
Weight		kg(lbs)	40 (88)	84(185)	84(185)	105(231)
Connection pipe diameter	Liquid	mm	9.52 (Flare)	12.70 (Brazing)	12.70 (Brazing)	12.70 (Brazing)
	Gas		19.05 (Flare)	22.22 (Brazing)	22.22 (Brazing)	22.22 (Brazing)
Drain hose diameter (I.D./O.D.)			25 / 32			




Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts


Long-Life Filter : UTD-LF60KA (For ARGC36) Remote Sensor Unit : UTY-XSZX  
IR Receiver Unit : UTB-YWC

Dimensions (Unit: mm)



Models: ARGC36

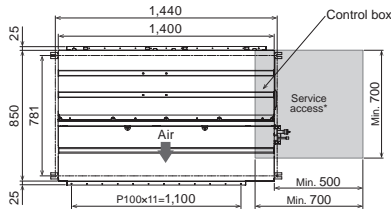

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.






Models: ARGC72 / ARGC90 / ARGC96

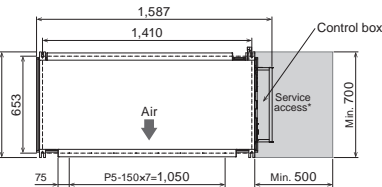

	ARGC 72/90GBTH	ARGC 96GATH
a	450	550
b	370	470

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.




High Static Pressure Duct



Easy installation  
(Compact size & Lightweight)

A compact size and lightweight indoor unit has been developed by reducing the basic chassis and the overall material weight.

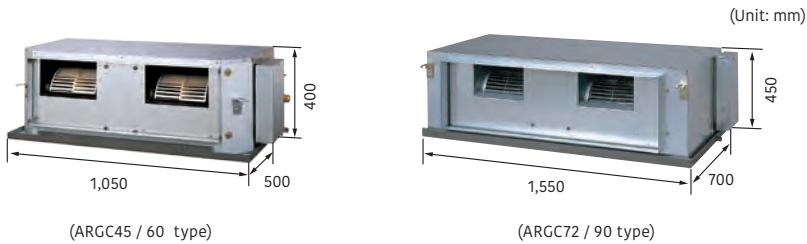

Static pressure selection


Models : ARGC72 / ARGC90

2 Types of static pressure mode are selectable.



High Static Pressure Duct (ARGC72)


The adoption of a single phase fan motor allows 3 steps fan speed control

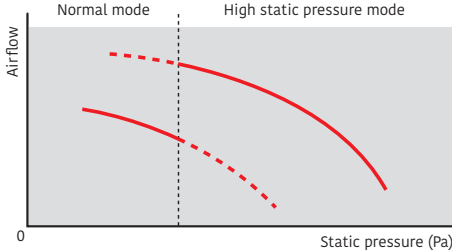


Low noise

Models : ARGC45 / ARGC60

Cutting off the corners of the conventional indoor unit front panel and fan casing, has enabled less turbulent air flow. Low noise is realized by adopting a plastic case and a plastic fan.

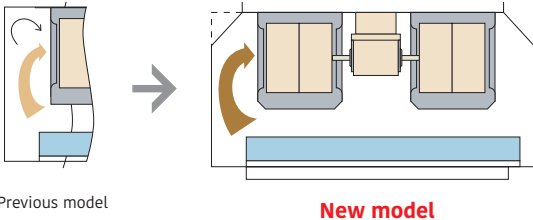

Installation styles

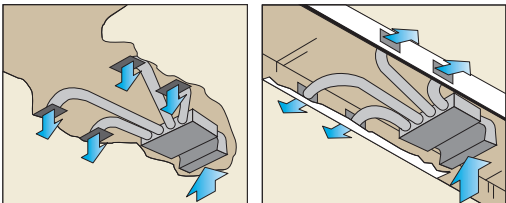

Model: ARGC45GATH / ARGC60GATH  
ARGC72GATH / ARGC90GATH



ARGC45/60GATH



ARGC72/90GATH

Specifications

Model name			ARGC45GATH	ARGC60GATH	ARGC72GATH	ARGC90GATH
Power source			Single phase, 220-240V, 50Hz			
Capacity	Cooling	kW	12.5	18.0	22.4	25.0
	Heating		14.0	20.0	25.0	28.0
Input power		W	715	730	1,110	1,250
Airflow rate	High	m³/h (l/s)	3,500 (972)	3,500 (972)	3,900 (1,083)	4,300 (1,195)
	Med		3,000 (833)	3,000 (833)	3,300 (917)	4,000 (1,111)
	Low		2,460 (683)	2,460 (683)	3,000 (833)	3,500 (972)
Static pressure range		Pa	100 to 250	100 to 250	50 to 300	100 to 300
Standard static pressure			100	100	260	250
Sound pressure level	High	dB (A)	49	49	51	53
	Med		45	45	48	51
	Low		42	42	45	49
Dimensions (H × W × D)		mm	400 × 1,050 × 500	400 × 1,050 × 500	450 × 1,550 × 700	450 × 1,550 × 700
Weight		kg(lbs)	46 (101)	46 (101)	83 (-)	85(-)
Connection pipe diameter	Liquid (Flare)	mm	9.52 (Flare)	9.52 (Flare)	12.70 (Brazing)	12.70 (Brazing)
	Gas (Flare)		19.05 (Flare)	19.05 (Flare)	22.22 (Brazing)	22.22 (Brazing)
Drain hose diameter (I.D./O.D.)			25 / 32			



Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts




Long-Life Filter : UTD-LF60KA (ARGC45/60) Remote Sensor Unit : UTY-XS2X  
IR Receiver Unit : UTB-YWC

Dimensions (Unit: mm)


Models: ARGC45 / ARGC60

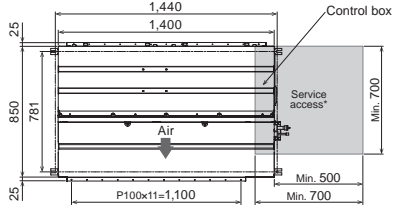

\*The design of the service access depends on the installation method. Refer to the installation manual for more information.



Models: ARGC72 / ARGC90

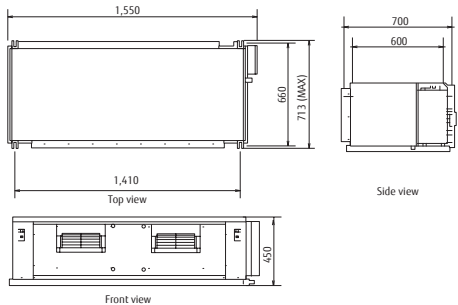



Floor/Ceiling



Flexible installation

Example for floor installation

Floor console




Example for ceiling installation

Under ceiling



Double auto swing

A combination of up/down and right/left directional swing allows three-dimensional air direction control.

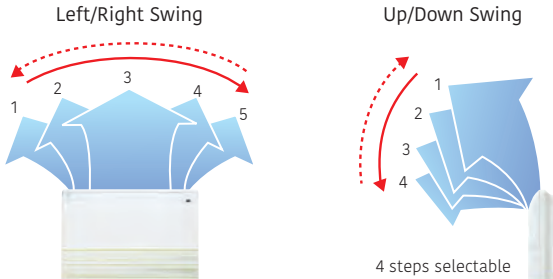


High power DC fan motor

- High power
- Wide rotation range
- High efficiency



Compact design

Symmetrical, slim and compact design.



Model: ABGA12GATH / ABGA14GATH  
ABGA18GATH / ABGA24GATH



Floor  
standing




Specifications

Model name			ABGA12GATH	ABGA14GATH	ABGA18GATH	ABGA24GATH
Power source			Single phase, 220-240V, 50Hz			
Capacity	Cooling	kW	3.6	4.5	5.6	7.1
	Heating		4.0	5.0	6.3	8.0
Input power		W	30	42	74	99
Airflow rate	High	m³/h (l/s)	660 (183)	780 (216)	1,000 (277)	1,000 (277)
	Med		570 (158)	640 (177)	720 (199)	820 (227)
	Low		490 (136)	550 (152)	580 (161)	680 (188)
Sound pressure level	High	dB (A)	36	40	46	47
	Med		32	36	39	42
	Low		28	34	35	37
Dimensions (H × W × D)		mm	199 × 990 × 655	199 × 990 × 655	199 × 990 × 655	199 × 990 × 655
Weight		kg(lbs)	25 (55)	26 (57)	26 (57)	27 (59)
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	9.52	9.52
	Gas (Flare)		12.70	12.70	15.88	15.88
Drain hose diameter (I.D./O.D.)			25 / 32			

Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts

Dimensions (Unit: mm)

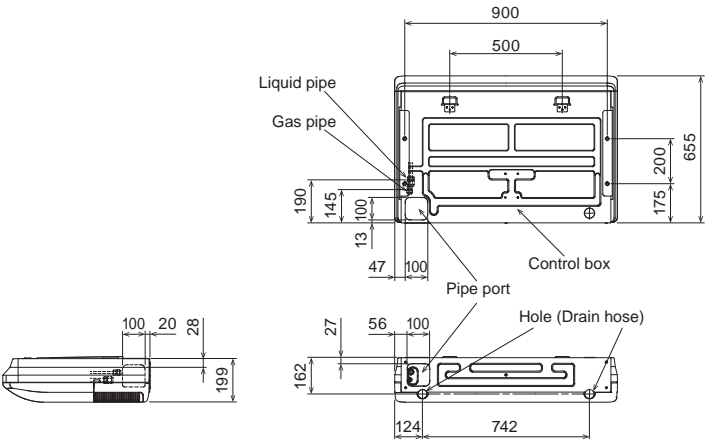


Ceiling




Installation

Open

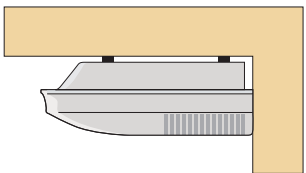


General installation pattern which suspends the indoor unit from the ceiling.

Concealed

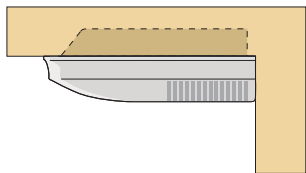

Installation pattern where part of the indoor unit is embedded into the ceiling.


Wall mounted (Field Supplied)

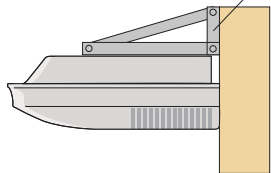

Installation which fixes the indoor unit to the wall by the use of wall brackets (Field supplied). This type of installation can be used when the ceiling space is insufficient.

Double auto swing and wide airflow

Auto airflow direction and auto swing

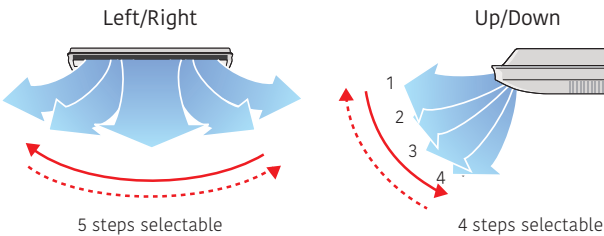


High power DC fan motor

- High power
- Wide rotation range
- High efficiency




Long airflow


Long Airflow ensures comfort to every corner of a large room.



Fresh air intake



Slim & Compact design



Model: ABGA30GATH / ABGA36GATH  
ABGA45GATH / ABGA54GATH




Specifications

Model name			ABGA30GATH	ABGA36GATH	ABGA45GATH	ABGA54GATH
Power source			Single phase, 220-240V, 50Hz			
Capacity	Cooling	kW	9.0	11.2	12.5	14.0
	Heating		10.0	12.5	14.0	16.0
Input power		W	66	85	131	180
Airflow rate	High	m³/h (l/s)	1,630 (452)	1,690 (469)	2,010 (558)	2,270 (629)
	Med		1,370 (379)	1,400 (389)	1,600 (444)	1,780 (493)
	Low		1,140 (316)	1,170 (325)	1,230 (342)	1,280 (355)
Sound pressure level	High	dB (A)	42	45	48	51
	Med		38	38	42	45
	Low		33	34	35	36
Dimensions (H × W × D)		mm	240 × 1,660 × 700	240 × 1,660 × 700	240 × 1,660 × 700	240 × 1,660 × 700
Weight		kg(lbs)	46 (101)	48 (106)	48 (106)	48 (106)
Connection pipe diameter	Liquid (Flare)	mm	9.52	9.52	9.52	9.52
	Gas (Flare)		15.88	19.05	19.05	19.05
Drain hose diameter (I.D./O.D.)			25 / 32			


Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts

Drain Pump Unit : UTR-DPB24T  
Flange : UTD-RF204

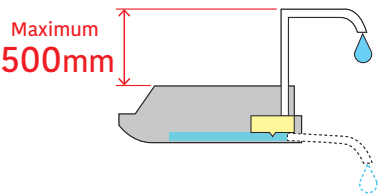

Dimensions (Unit: mm)

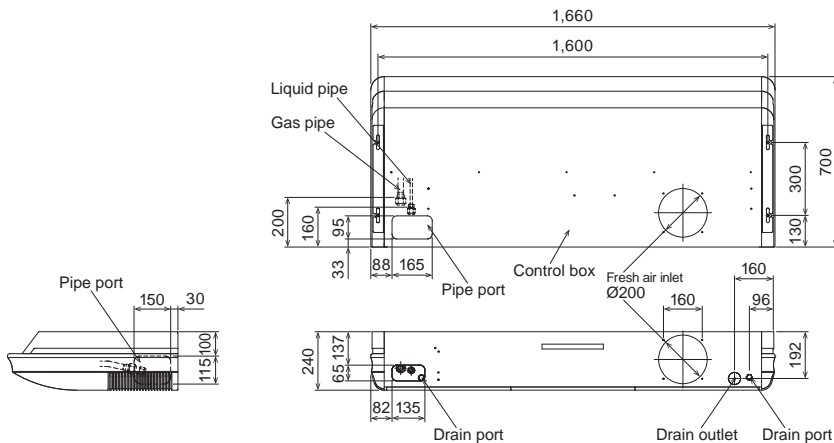




Wall-mounted type



Filter features

High performance filter provides high quality air conditioning






The filter deodorizes by powerfully decomposing absorbed odors using the oxidizing and reducing effects of ions generated by the ultra-fine-particle ceramic.

(\*The filter can be used for approx. 3 years if it is washed under water to restore its surface action when it is dirty.)



Fine dust, invisible mold spores, and harmful microorganisms are absorbed onto the filter by static electricity, and further growth is inhibited and deactivated by the polyphenol extracted from apples.

Deodorizing effect (Odor reduction rate)




High performance filters have been thoroughly tested by the Environmental Sanitary Inspection Center using an advanced Deodorization Test.

Compact size

Powerful output even compact design

Though the indoor unit is compact, it features a large, high pressure cross fan (90 mm diameter) in a centre mounted configuration and a Lambda type heat exchanger to provide plenty of power.

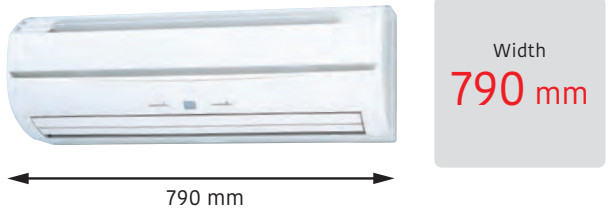

High power DC fan motor

- High power
- Wide rotation range
- High efficiency
- Compact size



Easy maintenance

Easy maintenance has been realized as the front panel can be removed for easy access.



Model: (EEV internal)  
ASGA07GACH / ASGA09GACH  
ASGA12GACH / ASGA14GACH  
(EEV internal)  
ASGA07GATH / ASGA09GATH  
ASGA12GATH / ASGA14GATH



Specifications


Model name			ASGA07GACH ASGA07GATH	ASGA09GACH ASGA09GATH	ASGA12GACH ASGA12GATH	ASGA14GACH ASGA14GATH
Power source			Single phase, 220-240V, 50Hz			
Capacity	Cooling	kW	2.2	2.8	3.6	4.5
	Heating		2.8	3.2	4.1	5.0
Input power		W	17	18	22	34
Airflow rate	High	m³/h (l/s)	490 (136)	500 (139)	560 (156)	670 (186)
	Med		450 (125)	450 (125)	480 (133)	490 (136)
	Low		370/420*1 (103/117*1)	370/420*1 (103/117*1)	420 (117)	420 (117)
Sound pressure level	High	dB (A)	35	36	39	44
	Med		33	33	35	37
	Low		27 / 31*1	27 / 31*1	31	32
Dimensions (H × W × D)		mm	275 × 790 × 215	275 × 790 × 215	275 × 790 × 215	275 × 790 × 215
Weight		kg(lbs)	9 (20)	9 (20)	9 (20)	9 (20)
Connection pipe diameter	Liquid (Flare)	mm	6.35	6.35	6.35	6.35
	Gas (Flare)		12.70	12.70	12.70	12.70
Drain hose diameter (I.D./O.D.)			13.8 / 15.8 to 16.7			

Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

\*1 : This value is under cooling operation.

Optional parts

Dimensions (Unit: mm)

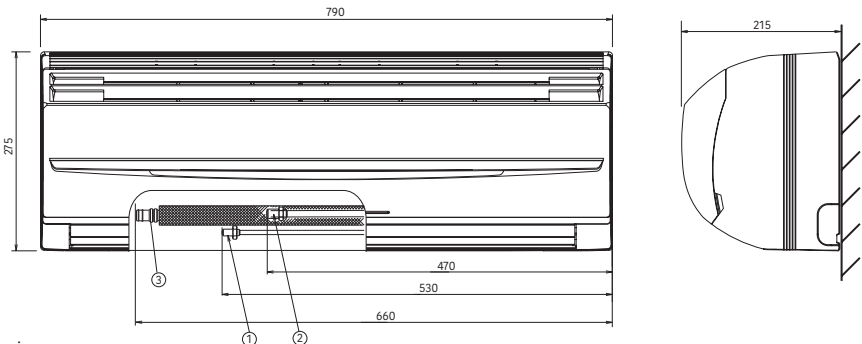


- ① Refrigerant piping flare connection (Liquid)
- ② Refrigerant piping flare connection (Gas)
- ③ Drain piping connection

Wall-mounted type




More comfort airflow by adopting power diffuser



“Vertical airflow” provides powerful floor level heating

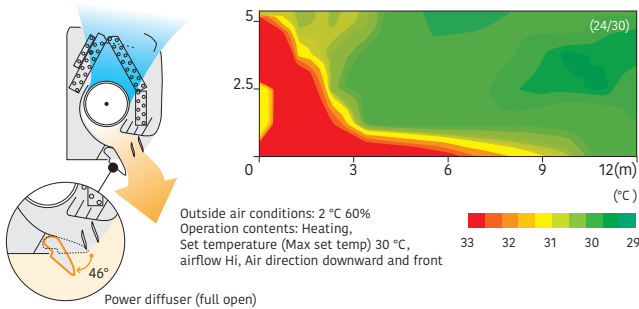

“Horizontal airflow” does not blow cool air directly at the occupants in the room

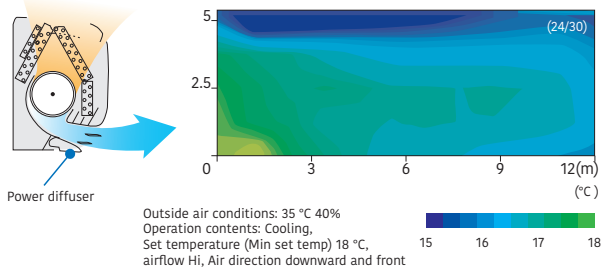


Air conditioner filter features

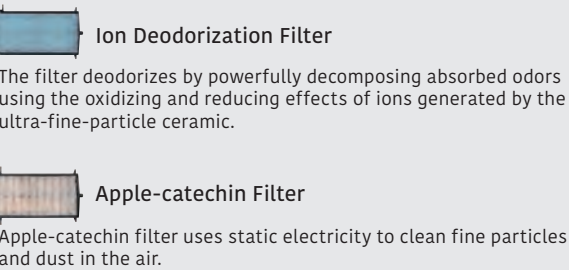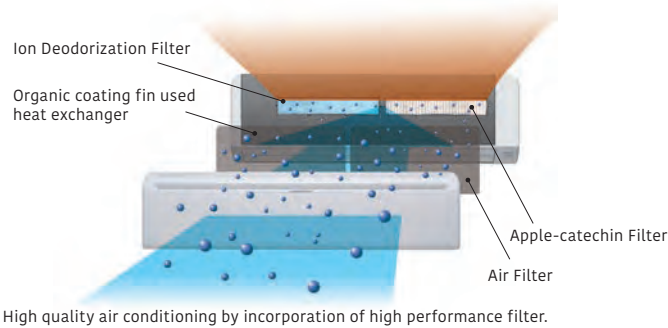

Double auto swing

A combination of up/down and right/left directional swing allows three-dimensional air direction control.

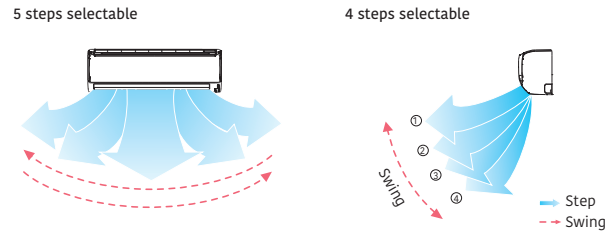

Model: (EEV internal)  
ASGA18GACH / ASGA24GACH / ASGA30GACH  
ASGA18GATH / ASGA24GATH / ASGA30GATH




Specifications

Model name		ASGA18GACH ASGA18GATH		ASGA24GACH ASGA24GATH	ASGA30GACH ASGA30GATH
Power source		Single phase, 220-240V, 50Hz			
Capacity	Cooling	kW	5.6	7.1	8.0
	Heating		6.3	8.0	9.0
Input power		W	32	60	91
Airflow rate	High	m³/h (l/s)	840 (233)	1,100 (305)	1,240 (343)
	Med		770 (213)	910 (252)	980 (271)
	Low		690 (191)	730 (202)	770 (213)
Sound pressure level	High	dB (A)	41	48	52
	Med		39	43	45
	Low		35	35	35
Dimensions (H × W × D)		mm	320 × 998 × 228	320 × 998 × 228	320 × 998 × 228
Weight		kg(lbs)	15 (33)	15 (33)	15 (33)
Connection pipe diameter	Liquid (Flare)	mm	9.52	9.52	9.52
	Gas (Flare)		15.88	15.88	15.88
Drain hose diameter (I.D./O.D.)			12 / 16		

Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m. Voltage : 230 [V].

Optional parts

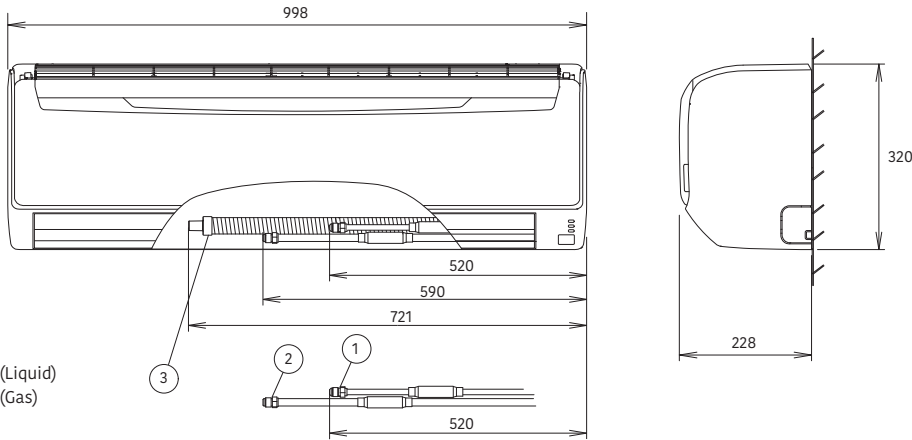


Dimensions (Unit: mm)





# VENTILATION

## Outdoor-air Processing Unit range

Airflow rate (m³/h)	1080	1680	2100
Model code	054	072	096
Outdoor-air Processing Unit	 ARXH054GTAH	 ARXH072GTAH	 ARXH096GTAH

**DX Kit**  
for Air Handling Unit or Fresh Air Handling Unit application

### Effective heat exchange and simultaneous fresh air ventilation

High Efficiency and low noise levels are achieved by using a highly efficient heat exchange process. A comfortable air conditioned space is achieved by conveniently selecting whether to use heat exchange or normal ventilation setting, according to the requirements of the conditioned space.




Outdoor-air  
Processing Unit





One VRF system can provide air conditioning and Fresh air supply at the same time.

Outdoor-air Processing Unit can be connected in a same VRF\*1 system as one of indoor unit series and can create fresh and comfortable air supply together from our high advanced technology.

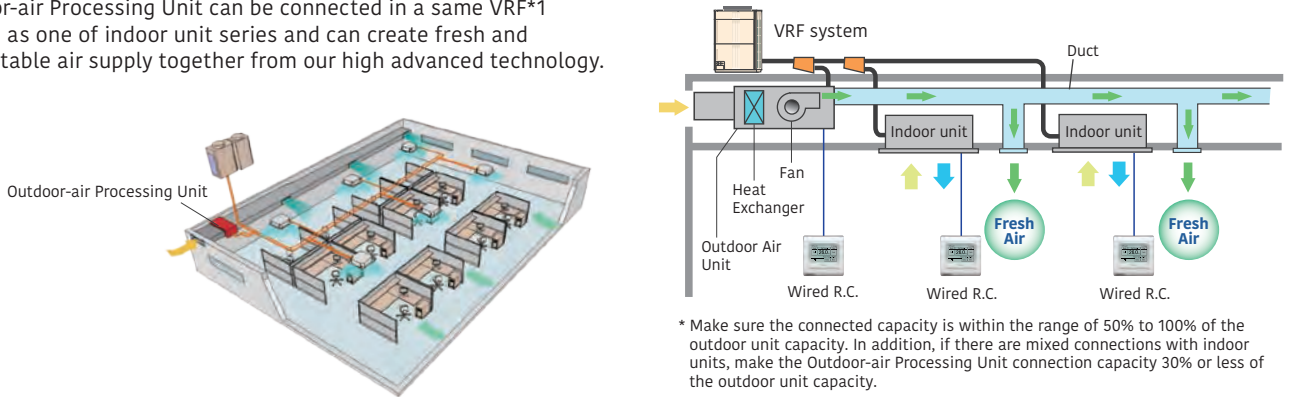


High energy savings and flexible duct design by using DC motor

- Greatly reduces electricity consumption by adopting permanent magnet compared to when using an AC motor.
- Compared with AC motor, changing the speed makes it possible to respond flexibly to the external static pressure from 50 Pa to 240 Pa. Even if damper equipment is not used, static pressure can be adjusted and duct design is easy.
- Static pressure can be set easily using wired remote controller.

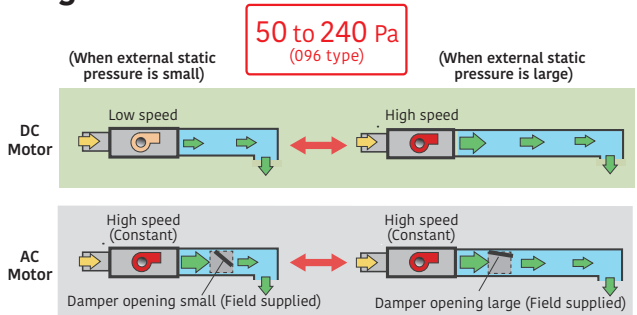

Top class compact design


- Top class lightweight compact design at just 425 mm in height, 55 kg in weight for ARXH072 type. This unit can be installed easily even at narrow space.

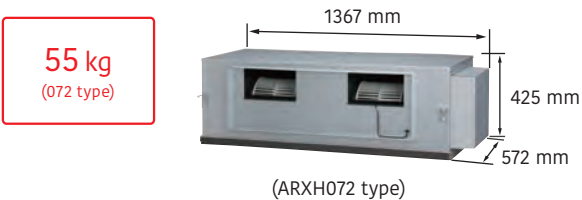


Various Controller

Supplied variety of controllers as options, such as individual controller, central controller, and building management controller.

Individual Controller

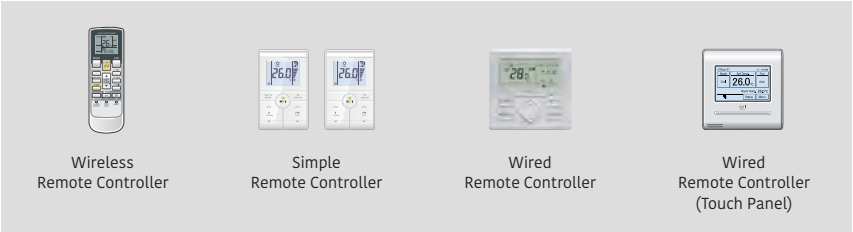

Central Controller

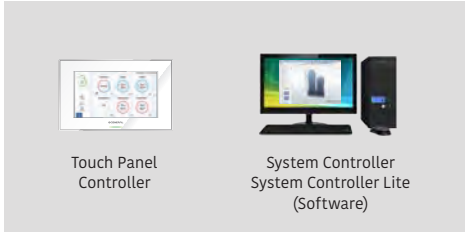

\* The temperature setting is discharged air temperature setting. The air volume is set to a constant speed.

Model:  
ARXH054GTAH / ARXH072GTAH / ARXH096GTAH




Specifications

Rated flow rate			1000 m³/h		1500 m³/h		2000 m³/h	
Model name			ARXH054GTAH		ARXH072GTAH		ARXH096GTAH	
Power source		V/Ø/Hz	220-240V, 50Hz					
Capacity	Cooling	kW	14.0		22.4		28.0	
	Heating		8.9		13.9		17.4	
Input power	Cooling	W	179		292		370	
	Heating		179		292		370	
Airflow rate		m³/h	1,080		1,680		2,100	
Static Pressure	Standard (range)	Pa	185		200		200	
			(50-185)		(50-200)		(50-240)	
Sound Pressure Level		dB(A)	42		44		47	
Dimensions (H × W × D)		mm	425 × 1,367 × 572		425 × 1,367 × 572		450 × 1,583 × 700	
Weight		kg	48		55		71	
Connection pipe diameter	Small	mm	9.52		12.70		12.70	
	Large		19.05		22.22		22.22	
Operating range	Cooling	°CDB	5 to 43		5 to 43		5 to 43	
	Heating		-7 to 21		-7 to 21		-7 to 21	
Refrigerant			R410A		R410A		R410A	


Note : Specifications are based on the following conditions.  
Cooling : Outdoor temperature of 33°CDB / 28°CWB.  
Heating : Outdoor temperature of 0°CDB / -2.9°CWB.  
Pipe length : 7.5 m Voltage : 230 [V].

Dimensions (Unit: mm)


Model: ARXH054

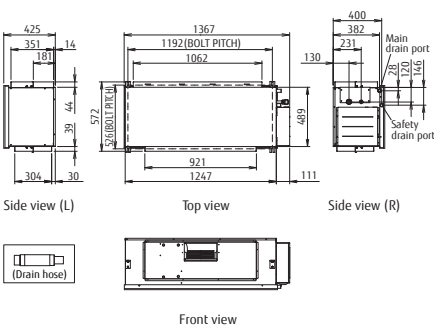

Model: ARXH072

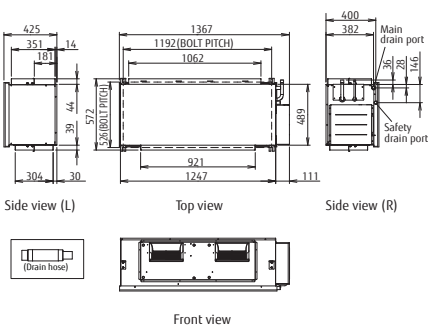

Model: ARXH096

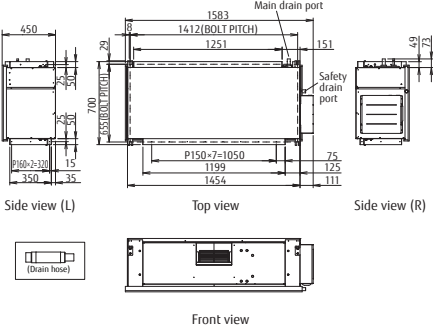




DX kit  
for Air handling  
applications  
for VRF Outdoor unit




Multiple temperature sensors optimally control  
the air handling unit and fan coil unit.

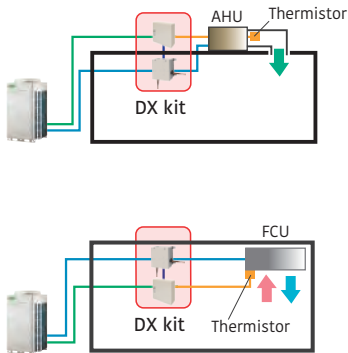

When connected to an Air handling unit, the temperature of supply air is controlled by a discharge air sensor.


When connected to a fan coil unit, the room temperature is controlled by the discharge air sensor.

Application as part of a VRF system

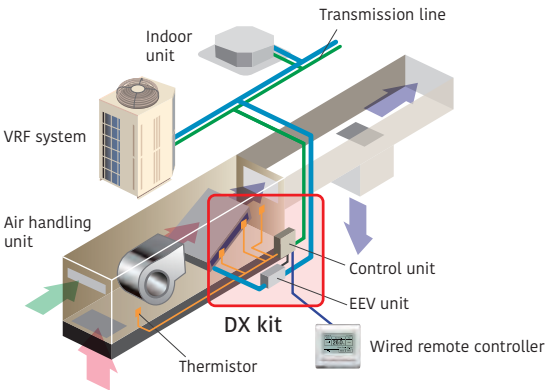



Supports a wide range of capacity classes

- Two EEV units can be connected in parallel to large-capacity units of up to 20 HP (50 kW). (UTP-LX180A separation tube required)
- Connectable capacity range: 5 kW to 50 kW

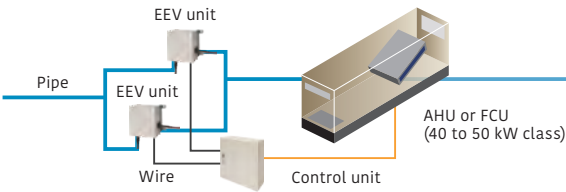

A variety of controls to match the application

- Central control using our VRF controllers or central management controllers

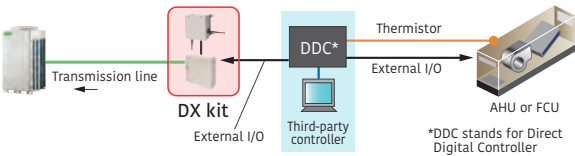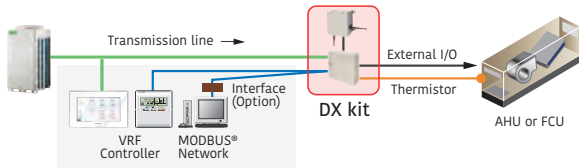

Summary of  
functions

Inputs

- ON/OFF
- Setting temperature
- Capacity demand
- Heating / Cooling operation mode
- Fault information

Outputs

- ON/OFF indication
- Fan ON/OFF indication
- Thermo ON/OFF indication
- Defrost indication
- Fault indication

Modbus Control


- Possible to control via a Modbus enabled BMS by using optional interface.

Installation requirements


- Connectable VRF Series : All VRF
- Connectable DX Kit system capacity range : 50 to 100 % of the outdoor unit capacity
- Connectable DX Kit system capacity range with indoor units : 30 % or less of the outdoor unit capacity
- Max. wiring length from control unit : 10 m
- Max. piping length between EEV unit and indoor unit : 5 m
- Outdoor installation : Control unit (IP54 class) and EEV unit can be installed at an outdoor space.

Connectable capacity

- Single connection



- Mixed connection

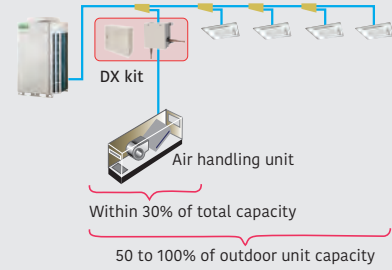


[For 2EEV units connection (option)]


- Separation Tube : UTP-LX180A



Pipe and wire length

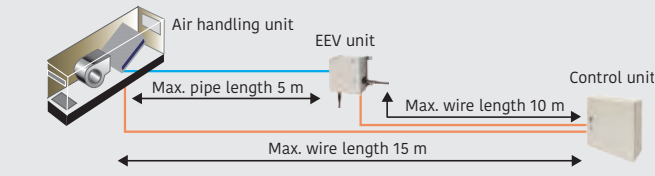

Control unit: UTY-VDGX  
EEV unit: UTP-VX30A/UTP-VX60A/UTP-VX90A

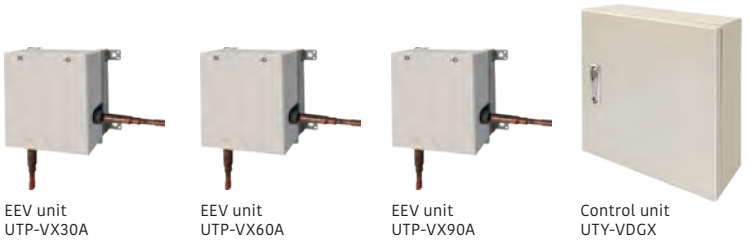

Specifications

EEV unit			UTP-VX30A			UTP-VX60A			UTP-VX90A		UTP-VX90A×2		
Power source		V/Ø/Hz	230/1/50										
Connectable capacity class		kW	5.0	6.3	8.0	10.0	12.5	14.0	20.0	25.0	40.0	50.0	
Capacity	Cooling	kW	5.6 (5.1-5.9)	6.3 (6.0-7.1)	8.0 (7.2-9.0)	10.0 (9.1-11.1)	12.5 (11.2-13.2)	14.0 (13.3-18.0)	22.4 (18.1-23.7)	25.0 (23.8-28.0)	40.0 (28.1-44.7)	50.4 (44.8-50.4)	
	Heating		6.3 (5.7-6.7)	7.1 (6.8-8.0)	9.0 (8.1-10.0)	11.2 (10.1-12.4)	14.0 (12.5-15.0)	16.0 (15.1-20.0)	25.0 (20.1-26.5)	28.0 (26.6-31.5)	45.0 (31.6-49.9)	56.5 (50.0-56.5)	
Airflow Rate(Reference value)		m³/h	1,060	1,200	1,520	1,600	2,000	2,240	3,560	4,000	6,400	8,000	
Dimensions (H × W × D)		mm	160 × 220 × 90									(160 × 220 × 90)× 2	
Weight		kg	2									2 × 2	
Connection pipe diameter	Liquid	mm	9.52	9.52	9.52	9.52	9.52	9.52	12.70	12.70	12.70	12.70	

Control unit		UTY-VDGX	
Power source	V/Ø/Hz	230 / 1 / 50	
Dimensions (H × W × D)	mm	400 × 400 × 120	
Weight	kg	10	

Note : Specifications are based on the following conditions.  
Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length : 7.5 m Voltage : 230 [V].

# VRF CONTROL SYSTEMS

CONTROL SYSTEM OVERVIEW

BEST CONTROL SOLUTION FOR EACH PROPERTY

COMPARISON TABLE OF CONTROLLERS

Individual Controller

Centralized Controller

Converter / Adaptor



## User friendly control system provides individual control to centralized control


The VRF control system can perform air conditioning control of individual room, centralized control by floor or by building, or centralized energy saving air conditioning control for large buildings. A variety of air conditioning management schemes are available to match the application, such as linking with the building control system, linking with a single split models, and using various interfaces.




# CONTROL SYSTEM OVERVIEW

User's needs are supported by offering a variety of controls, such as individual control, central control and building management control options.


## Air Conditioning Individual Control




**Wired Remote Controller (Design type)**  
UTY-RVRG




**Wired Remote Controller (Touch panel)**  
UTY-RNRGZ5




**Wired Remote Controller**  
UTY-RLRG




**Compact Wired Remote Controller**  
UTY-RCRGZ1  
UTY-RCRGZ1K  
**NEW** UTY-RCRGZ1B




**Simple Remote Controller**  
UTY-RSRG  
UTY-RHRG Without operation mode



**Wireless Remote Controller**  
UTY-LNHGU



**IR Receiver Unit**  
UTB-YWC For Duct type



**IR Receiver Unit**  
UTY-LRHGB1 For Cassette type  
UTY-LBHGD For Circular Flow Cassette

## Air Conditioning Centralised Control



**System controller (Software)**  
UTY-APGXZ1  
UTY-ALGXZ1 (Lite edition)  
**Maximum controllable 1600\* indoor units**


\* Lite edition is maximum controllable 400 indoor units




**Central Remote Controller**  
UTY-DCGGZ3  
**Maximum controllable 100 indoor units**

## Converter / Adaptor For external device


**BACnet® Gateway**  
UTY-ABGXZ1 **(Software)**




**BACnet® Gateway**  
VTY-VBGX **(Hardware)**




**MODBUS® Converter**  
UTY-VMGX **(Hardware)**




**MODBUS® Interface**  
FJ-RC-MBS-1




**KNX® Converter**  
UTY-VKGX **(Hardware)**




**KNX® Interface**  
FJ-RC-KNX-1i



**Wireless LAN Adapter**  
UTY-TFSXJ3



**External Switch Controller**  
UTY-TERX



BMS / BAS\*2




BMS, Home automation system




\*1. USB Adaptor: Echelon™ U10 USB Network Interface  
\*2. BMS/BAS: Building Management System/Building Automation System

## Converter / Adaptor For system expansion


**Network Converter (DC power supply)**  
UTY-VTGX




**Network Converter (AC power supply)**  
UTY-VTGXV



**Signal Amplifier**  
UTY-VSGXZ1









**Thermostat Converter**  
UTY-TTRXZ1













# BEST CONTROL SOLUTION FOR EACH PROPERTY

Fujitsu General provides the best control solutions suitable for the various properties.











SHOP

<div>Type</div> <div></div>	Individual Control	Centralized Control		Integrating Control (Interface)	
					
	Wired Remote Controller	Central Remote Controller	System Controller	MODBUS® Converter	KNX® Convertor
	UTY-RVRG, UTY-RNRGZ5, UTY-RLRG, UTY-RCRGZ1, UTY-RCRGZ1K	UTY-DCGGZ3	UTY-APGXZ1, UTY-ALGXZ1	UTY-VMGX	UTY-VKGX
Automatic control of A/C (Schedule timer, Weekly timer etc.)	●	●	●		
Limited control for staff (RC Prohibition, Room temp set point limitation etc.)		●	●	●	●
Group Control		●	●		
Advanced Energy Saving (Peak cut, Indoor unit lead lag operation etc.)			●		
Remote Management			●		
Manage multiple sites			●		
Monitor energy consumption			●		
Control third party products			●		
Integrate FGL A/C into BMS				●	●

HOTEL













<div>Type</div> <div></div>	Individual Control			Centralized Control		Integrating Control (Interface)			
									
	Wired Remote Controller	Simple Remote Controller	Wireless Remote Controller	Central Remote Controller	System Controller	BACnet® Gateway	MODBUS® Converter	KNX® Convertor	External Switch Controller
	UTY-RVRG, UTY-RNRGZ5, UTY-RLRG, UTY-RCRGZ1, UTY-RCRGZ1K	UTY-RSRG, UTY-RHRG	UTY-LNHGU	UTY-DCGGZ3	UTY-APGXZ1, UTY-ALGXZ1	UTY-ABGXZ1, UTY-VBGX	UTY-VMGX	UTY-VKGX	UTY-TERX
Local control for hotel guest	●	●	●						
Centralized A/C control for common space				●	●	●	●	●	
Limited control for hotel guests				●	●	●	●	●	
Remote Management					●				
Advanced Energy Saving (Peak cut, Indoor unit lead lag operation etc.)					●	●			
Monitor energy consumption					●				
Control third party products					●				
Integrate FGL A/C into BMS						●	●	●	
Interlock with window contact									●
Interlock with key-card									●

OFFICE

<div>Type</div> <div></div>	Individual Control			Centralized Control		Integrating Control (Interface)			
									
	Wired Remote Controller	Simple Remote Controller	Wireless Remote Controller	Central Remote Controller	System Controller	BACnet® Gateway	MODBUS® Converter	KNX® Convertor	External Switch Controller
	UTY-RVRG, UTY-RNRGZ5, UTY-RLRG, UTY-RCRGZ1, UTY-RCRGZ1K	UTY-RSRG, UTY-RHRG	UTY-LNHGU	UTY-DCGGZ3	UTY-APGXZ1, UTY-ALGXZ1	UTY-ABGXZ1, UTY-VBGX	UTY-VMGX	UTY-VKGX	UTY-TERX
Local control for office staff	●	●	●	●					
Automatic control of A/C (Schedule timer, Weekly timer etc.)	●		●	●	●	●			
Centralized A/C control for management				●	●	●	●	●	
Limited control for office staff (RC Prohibition, Room temp set point limitation etc.)				●	●	●	●	●	
Advanced Energy Saving (Peak cut, Indoor unit lead lag operation etc.)					●	●			
Remote Management					●				
Energy Charge Apportionment					●	●			
Monitor energy consumption					●				
Control third party products					●				
Integrate FGL A/C into BMS						●	●	●	
Interlock with door contact									●
Interlock with human sensor for meeting room									●



COMPARISON TABLE OF CONTROLLERS

Item												
	Wired Remote Controller (Design type)	Wired Remote Controller (Touch panel)	Wired Remote Controller	Compact Wired Remote Controller			Simple Remote Controller	Simple Remote Controller*1	Wireless Remote Controller	Central Remote Controller	System Controller Lite <small>Software</small>	System Controller <small>Software</small>
Model name	UTY-RVRG	UTY-RNRGZ5	UTY-RLRG	UTY-RCRGZ1	UTY-RCRGZ1	UTY-RCRGZ1B	UTY-RSRG	UTY-RHRG	UTY-LNHGU	UTY-DCGGZ3	UTY-ALGXZ1	UTY-APGXZ1
Max. controllable remote controller groups	1	1	1	1			1	1	1	100	400	1600
Max. controllable indoor units	16	16	16	1			16	16	16	100	400	1600
Max. controllable groups	—	—	—	—			—	—	—	50	400	1600
Air conditioning control function	On / Off	●	●	●			●	●	●	●	●	●
	Operation mode setting	●	●	●			●	—	●	●	●	●
	Fan speed setting	●	●	●			●	●	●	●	●	●
	Room temp. setting	●	●	●			●	●	●	●	●	●
	Room temp. set point limitation	●	●	—			●	●	—	●	●	●
	Test operation	●	●	●			●	●	●	—	—	—
	Up/down air direction flap setting	●	●	●			●	●	●	●	●	●
	Right/left air direction flap setting	●	●	●			—	—	●	●	●	●
	Individual louver control	●	●	—			—	—	—	●*3	—	—
	Group setting	—	—	—			—	—	—	●	●	●
	RC prohibition	—	—	—			—	—	—	●	●	●
	Anti freeze setting	●	●	—			—	—	—	●	●	●
	Set temp. auto return	●	●	●			—	—	—	—	—	—
	Economy mode setting	●	●	●			—	—	●	●	●	●
	Human sensor control	●	●	—			—	—	—	●	●	●
Display	Error	●	●	●			●	●	—	●	●	●
	Defrosting	●	●	●			●	●	—	●	●	●
	Current time	●	●	—			—	—	●	●	●	●
	Day of the week	●	●	—			—	—	—	●	●	●
	R.C. prohibition	●	●	●			●	●	—	●	●	●
	Address display	●	●	●			●	●	—	—	●	●
	Room temp	●	●	—			●	●	—	●*4	●*4	●*4
	Multi-language	●	●	—			—	—	—	●	●	●
	Summer time	●	●	—			—	—	—	●	●	●
	Name registration	●	●	—			—	—	—	●	●	●
	Backlight	●	●	—			●	●	—	●	—	—
	2D floor layout / 3D building display	—	—	—			—	—	—	—	—	●
	Refrigerant leakage detection function	—	—	—			—	—	—	●	●	●
	Logo Display	●	—	—			—	—	—	—	—	—
Timer	Schedule timer	Period	Week	Week	Week	—	—	—	—	Week	Year	Year
		ON/OFF, Temp, Low noise mode*5, Times per day	8	8	4	—	—	—	—	20	144	144
	On/off timer	—	●	●	●(OFF only)			—	—	—	—	—
	Sleep timer	—	—	—	—			—	—	—	—	—
	Program timer	—	—	—	—			—	—	—	—	—
	Auto off timer	●	●	●	—			—	—	●	—	—
	Day off	●	●	●	—			—	—	●	●	●
	Min. unit of timer setting (Minutes)	1 • 10	10 • 30	30	—			—	5	10	10	10
Control	Status monitoring system	—	—	—	—			—	—	●	●	●
	Electricity charge apportionment	—	—	—	—			—	—	—	○	●
	Error history	●	●	●	—			—	—	●	●	●
	Emergency stop	—	—	—	—			—	—	●*2	—	—
	Remote management	—	—	—	—			—	—	●	○	●
	Energy saving management	—	—	—	—			—	—	—	○	○
	E-mail notification for malfunction	—	—	—	—			—	—	●	●	●
	Key lock	● Child lock	● Child lock	● Child lock	—			—	—	● Password setting	● Password setting	● Password setting
Low noise mode		—	—	—	—			—	—	—	●	●

\*1 "Operation mode" setting is not available for this model. \*2 This function is available only through external input control.  
\*3 Only individual airflow batch reset is mounted. \*4 This function is available only when using wired remote controller. \*5 UTY-DCGGZ3 only  
●: Supported    ○: Optional function    —: Not supported yet

Wired remote controller (Design type)

UTY-RVRG



Up to  
**16** indoor units  
Up to  
**1** group



Simple and stylish design that harmonizes with the space

- The new stylish design controller, UTY-RVRG, enables intuitive operation with touch screen. It is compatible with many 2-wired indoor units.


Harmonizes with the Installation Space

When not in use, the controller is a part of the interior décor. This is achieved by using mirrors, glass, and clear panels, and it appears to be one with the wall. The sleek and stylish design won the 2022 Good Design Award and was selected as a finalist for the 2023 IDEA award.



Intuitive operation

The touch screen is easily operated by swiping vertically and horizontally, and users can operate the controller without using manuals.

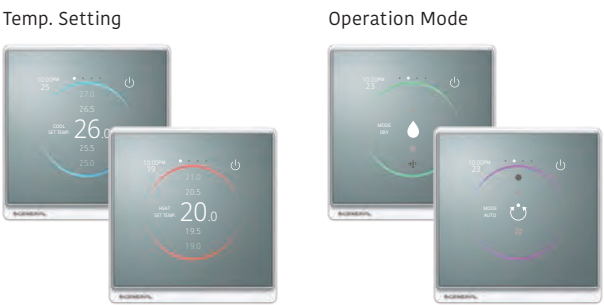

Status LED Colors

When not in use, the operation mode is indicated through LED lamp colors shown under the controller. The LED lamp can be switched ON and OFF to avoid glare at night.



Features: Wired remote controller (Design type)

Logo Display

The controller can display hotel logos when not in use. Images are sent via Bluetooth® connection where data is saved in the flash memory built into each controller.  
\* Color display available




AIRSTAGE Remo Set application (free download)

Set up your new Wired Remote Controller via Bluetooth from your smartphone (or directly at the controller).


Features:

- Initial configuration
- Function setting
- Custom logo import
- Copy settings between controllers

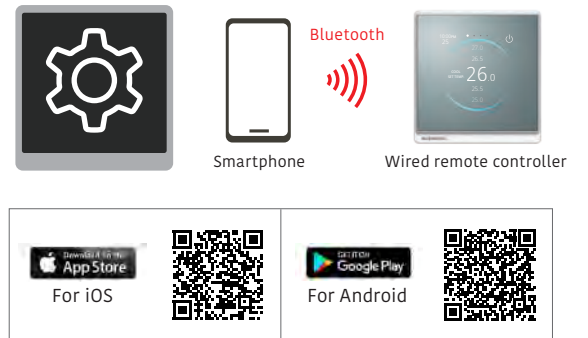

Initial Settings / Indoor Unit Function

The initial controller settings and indoor unit function settings can be sent from a smartphone by pairing with the controller via Bluetooth. It also can read the setting values of a paired controller, and send a copy of them to one or more additional controllers, significantly reducing installation time.

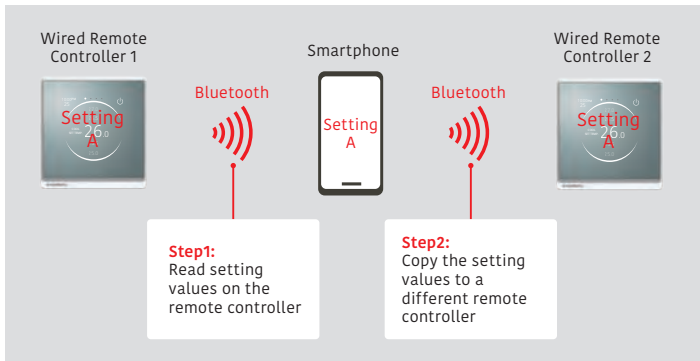

\*Smartphone : Wired Remote Controller = 1 : 1

Specifications

Model name		UTY-RVRG
Power Supply		DC 12V
Dimensions (H x W x D)	mm	121.5 × 116 × 26
Weight	g	225



Wired remote controller (with touch panel)

UTY-RNRGZ5



Up to  
**16** indoor units  
Up to  
**1** group

Easy operation by high-definition large STN-LCD touch panel screen

- Easy finger touch operation with LCD panel
- Built-in weekly/Daily timer (ON/OFF, Temp., Mode)
- Backlight enables easy operation in a darkened room
- Room temperature display
- Control up to 16 indoor units
- Corresponds to 12 different languages (English, Chinese, French, German, Spanish, Russian, Polish, Italian, Greek, Portuguese, Turkish and Dutch)
- 2-wire type


High performance and compact size

- In addition to the individual control, various energy saving controls can be realized using one remote controller only.



Accurate and comfortable control

- Indoor temperature can be detected accurately by the inclusion of a thermo sensor in the body of the wired controller.

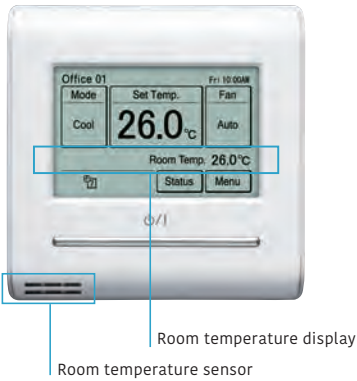


Various energy saving control

Custom Auto


- Maintains 2 separate set points for heating and cooling.
- Automatically changes mode between heating and cooling.
- \* This function is not available for some models.

Cooling set temp. 27°C, Heating set temp. 26°C

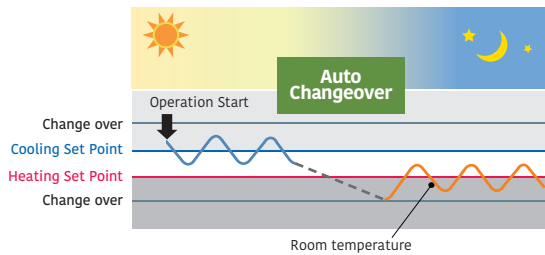

Auto OFF timer

- The indoor unit automatically is turned off when it reaches to the preset operating time frame.
- The time frame of the “Auto off timer” can be flexibly scheduled.
- Can be set off time 30 to 240 minutes

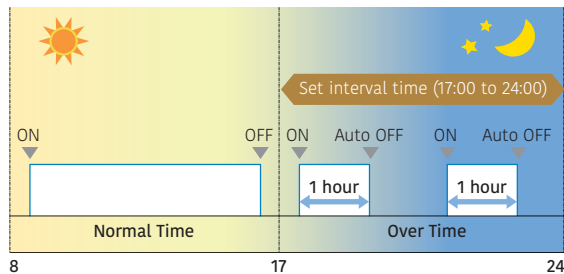

Ex.) At interval time hour (17:00 to 24:00) to prevent forgetting to turn off  
Set off time : 1 hour

2 schedules Weekly Timer

Set Temperature Auto Return


Set Temperature Upper and Lower Limit Setting

Features: Wired remote controller (with touch panel)

Various energy saving control


Displays setting status and Limitations

- The remote controller settings can be easily checked

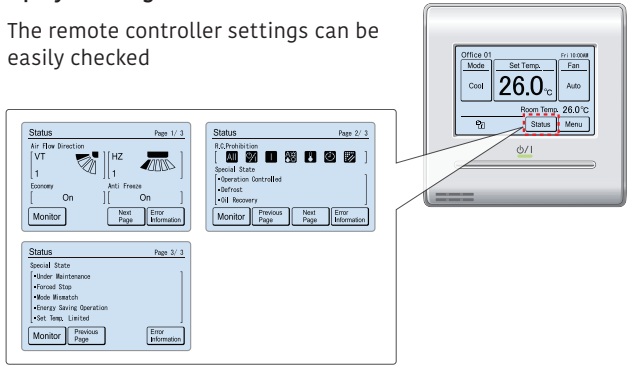

Summer Time display

- This function can be set easily from Menu screen




Child lock

- Lock / unlock method: Push the ON/OFF button and the screen (4 seconds)




Name Registration

- Remote controller names can be registered in the remote controller screen. This makes it easy to identify the indoor unit you want to control in the room.



Backlight

- Backlight enable easy operation in a darkened room.
- For the lighting time of Backlight, 30 or 60 seconds can be set.
- Backlight activates while the buttons are operated and goes off 30 or 60 seconds after the operation stops.



Specifications


Model name		UTY-RNRGZ5	
Power Supply		DC 12V	
Dimensions (H x W x D)		mm	120 × 120 × 20.4
Weight		g	220

DC12V is supplied by indoor unit.

Simplified installation


Uses non-polar 2-wire type

- The faulty wiring can be prevented by using non-polar 2-wire.

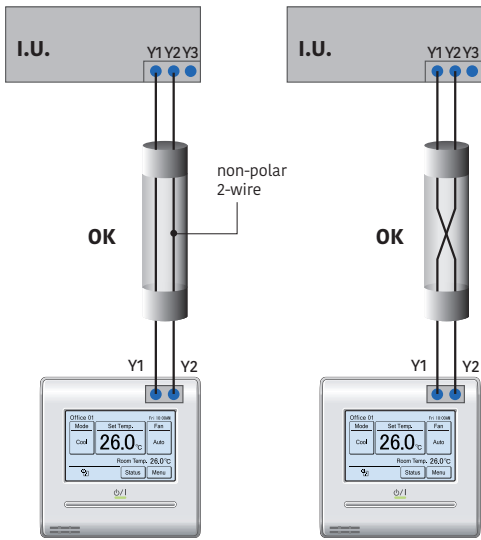

Auto Address Setting/Setting Position Notification


- Reduce errors and install time compared with the current specification Rotary SW
- When will be set remote controller groups, can also be set automatically new Wired remote controller address
- After auto address setting of new wired remote controller groups, what number can also confirm addresses

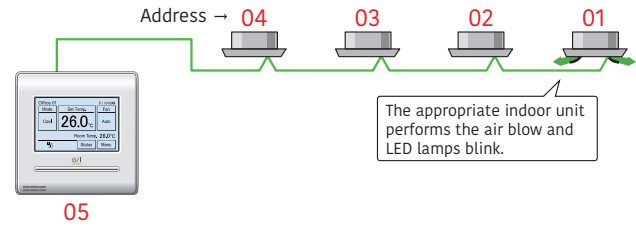

Easy Maintenance

Error History Display

- The errors that occur in the indoor unit or remote controller are saved as a history.
- A maximum of 32 error incidents can be saved.



Wired remote controller

UTY-RLRG



Up to  
16 indoor units  
Up to  
1 group

- Various timer setup (ON / OFF / WEEKLY) are possible.
- The room temperature can be controlled by detecting the temperature accurately with Built-in thermo sensor.
- When a failure occurs, the error code is displayed.
- Error history. (Last 16 error codes can be accessed.)
- 2-wire type


High performance and compact size

- In addition to the individual control, various energy saving controls can be realized using one remote controller only.




Visually intuitive operation

- The operation mode, set temperature, and fan speed are shown prominently on the top screen.
- Each function to be set is indicated by an icon.
- The control guide makes it simple and straightforward to operate a remote controller.

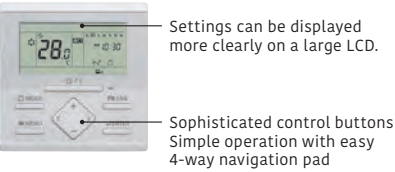


Auto-off timer

- The indoor unit automatically turns off after a set time has passed.

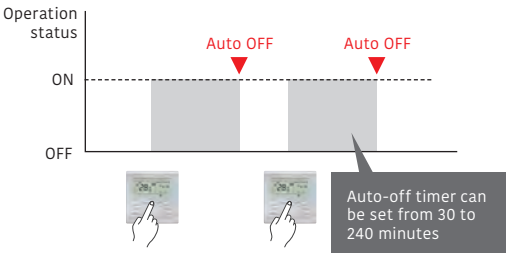

Set temperature auto return

- The setting temperature automatically returns to the previously set temperature.
- The time range in which the set temperature can be changed is 30 to 240 minutes.

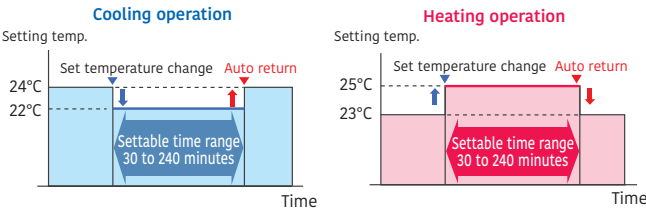

Specifications

Model name		UTY-RLRG	
Power Supply		DC 12V	
Dimensions (H x W x D)	mm	120 × 120 × 17	
Weight	g	170	


DC12V is supplied by indoor unit.

Compact wired remote controller

UTY-RCRGZ1 / UTY-RCRGZ1K / NEW UTY-RCRGZ1B



UTY-RCRGZ1



UTY-RCRGZ1K



UTY-RCRGZ1B


Up to  
1 indoor units  
Up to  
1 group

- Simple design to match the stylish interior
- Easy to install : Body of controller is designed to fit in European standard junction box
- Can be operated both by wireless and wired remote controller.
- 2-wire type

Large screen and simple display

- Although the size is compact, the screen is large
- Large letters makes it easy to see
- Operation is simple and easy-to-understand


- 1 Visible large letter
- 2 Touch key (Frequently-used operation is placed on the direct button)
- 3 Operation mode
- 4 Menu
- 5 Air flow
- 6 Built in IR reciever
- 7 LCD with backlight is clearly visible in the dark
- 8 Easy-to-understand pictograph display
- 9 LED is mounted for the ON/OFF key (Green light on when R.C. is turned on)

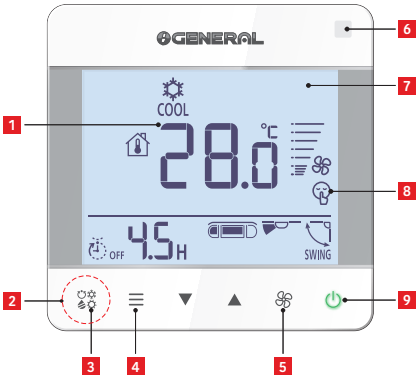

System overview


- VRF connection

One indoor unit and one remote controller are connected in one non-polar and 2-wire remote controller system.

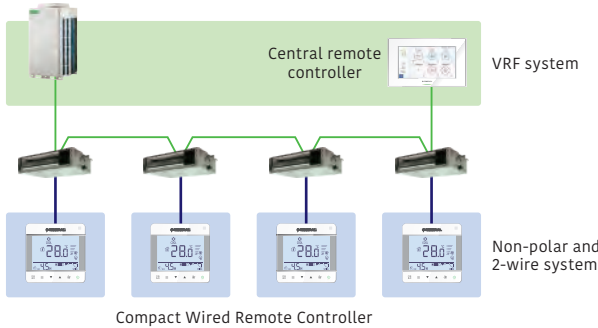

- RAC (Room air conditioner) connection

One indoor unit and one remote controller are connected in one non-polar and 2-wire remote controller system.



Specifications

Model name		UTY-RCRGZ1	UTY-RCRGZ1K	UTY-RCRGZ1B
Power Supply		DC 12V		
Dimensions (H x W x D)	mm	86 × 86 × 44		
Weight	g	135		

DC12V is supplied by indoor unit.



Simple remote controller

UTY-RSRG / UTY-RHRG (without operation mode)



Up to  
**16** indoor units  
Up to  
**1** group

Compact remote controller provides access to basic functions

- Up to 16 indoor units can be controlled with one remote controller.
- Suitable for hotels or offices as it is easily operated with no complex functions.
- Stylish design: Simple design to match the stylish interior.
- Large LCD screen & simple operation buttons
- Backlight: White colored backlight on monitor enable easy operation in dark.
- 2-wire type

Corresponding to various applications


Vertical louver control:

Vertical airflow direction can be adjusted for Duct types with auto louver and Cassette types, which are installed in hotels and conference rooms, can be adjusted.




Room temperature set point limitation:

The Simple Remote Controller can manage to energy saving operation in small buildings without the central control unit.

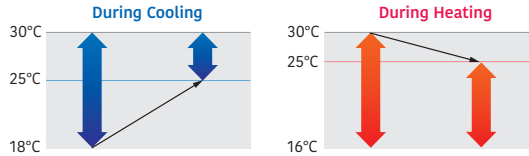

Built in room temperature sensor:

The Simple Remote Controller detects actual room temperature and controls room climate accuracy.

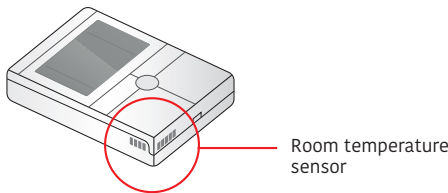

Specifications

Model name		UTY-RSRG	UTY-RHRG
Power Supply		DC 12V	
Dimensions (H x W x D)		120 × 75 × 19.4	
Weight		120	

Wireless remote controller

UTY-LNHGU



Up to  
**16** indoor units  
Up to  
**1** group  
Up to  
**4** different daily timers

Simple and sophisticated operations with a choice of 4 daily timers


- A single controller controls up to 16 indoor units.

Built-in daily timer

Select from 4 different timer programs : On / Off / Program / Sleep


**Program timer** : The program timer operates the ON and OFF timer once within a 24 hour period.

**Sleep timer** : The sleep timer function automatically corrects the set temperature according to the time setting to prevent excessive cooling or heating during sleep hours.

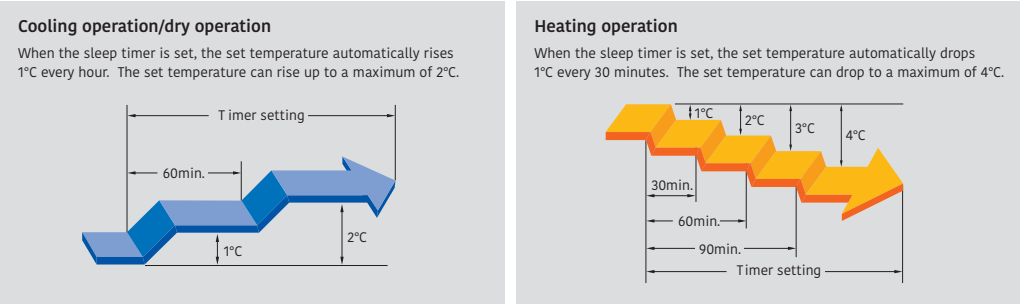


Easy installation and operation

Code selector switch prevents indoor unit mix-up. (Up to 4 codes can be set.)

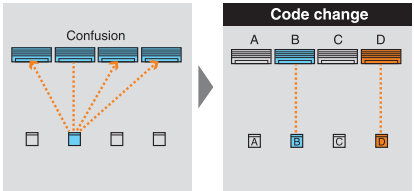


Wide and precise



Address setting

During installation work, address setting can be performed using the Wireless Remote Controller, thus eliminating manual switch setting.

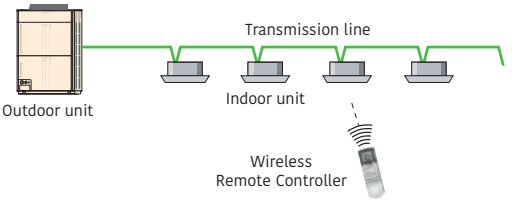

Specifications

Model name		UTY-LNHGU
Power Supply		1.5V (R03 / LR03 / AAA) × 2
Dimensions (H x W x D)		170 × 56 × 19
Weight		85

WLAN adapter

UTY-TFSXJ3



UTY-TFSXJ3  
(CN connector type)

Up to  
1 indoor unit



AIRSTAGE Mobile

“AIRSTAGE Mobile” is an application software that enables you to manage the Fujitsu General’s air conditioner(s) with a mobile device from anywhere.

- Maximum 5 accounts per 1 indoor unit
- Room / Outdoor temperature display
- Can be used for a Single / Multi and VRF indoor units.
- No separate external power supply required



User Friendly for Everyone

Enjoy easy-to-use centralized operation of air conditioners via a smartphone anytime, anywhere



Image\*



House Owner



Shop Owner



Commercial Building Owner

Main Functions

- ON / OFF
- Operation mode
- Fan speed
- Louver position
- Set temperature control
- Weekly timer
- Room temperature display
- Outdoor temperature display
- Error display

\*Contents of display differ depending on the type of indoor unit.

New Design!

Ease of use is pursued to achieve a stylish design.

The more legible and accessible timer UI enables effortless schedule management.



Mode change



Fan speed change




Weekly timer



Features: AIRSTAGE Mobile

Centralized operation for flexible remote management of all air conditioners

AIRSTAGE Mobile is ideal for a wide range of applications, from large residential buildings to smaller commercial spaces such as offices and stores. Anyone who has a smartphone and an adapter can access to manage the system at a low cost.

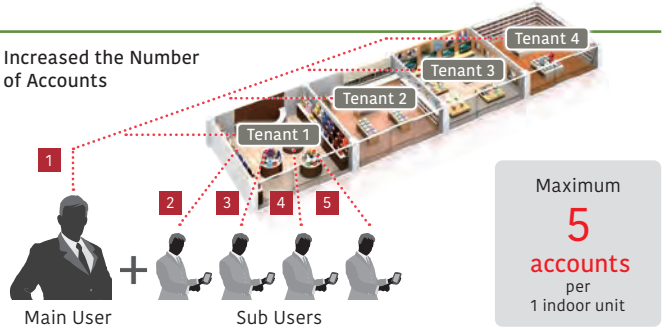


Hierarchical group management

Multiple air conditioners can be combined into a single group for centralized operation. Several groups can also be organized at once. Grouping the air conditioners by building, floor, or room makes it easy for users to monitor their operation status and operate them quickly.



Operate air conditioner and check its operation status just by talking to it

Connecting with a smart speaker allows the user to operate the air conditioner and check its operation status just by talking to it.

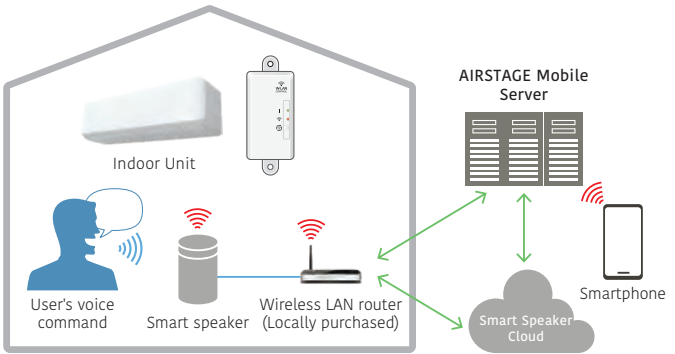

Specifications

UTY-TFSXJ3(CN connector type)		
Model name		
Dimensions (H x W x D)	mm	71 × 38 × 15
Weight	g	35

DC12V is supplied by indoor unit.



IR receiver unit for duct type


UTB-YWC

Duct type\* indoor units can be controlled with Wireless Remote Controller

\*Only Large Airflow Duct cannot be connected to IR Receiver Unit.

- Up to 16 indoor units can be controlled with one remote controller.
- Suitable for hotels or offices as it is easily operated with no complex functions.

Wiring connection

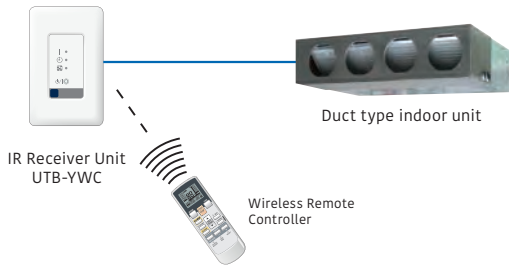

Specifications

< Wireless Remote Controller >

Model name		UTB-YWC
Power Supply		1.5 V (R03/LR03/AAA)
Dimensions (H x W x D)	mm	170 × 56 × 19
Weight	g	85

< IR Reciver Unit>


Battery		DC 5V
Dimensions (H x W x D)	mm	145 × 90 × 30
Weight	g	150

IR receiver unit for cassette

UTY-LRHGB1, UTY-LBHXD

Cassette type indoor unit can be controlled with Wireless Remote Controller

Wiring connection

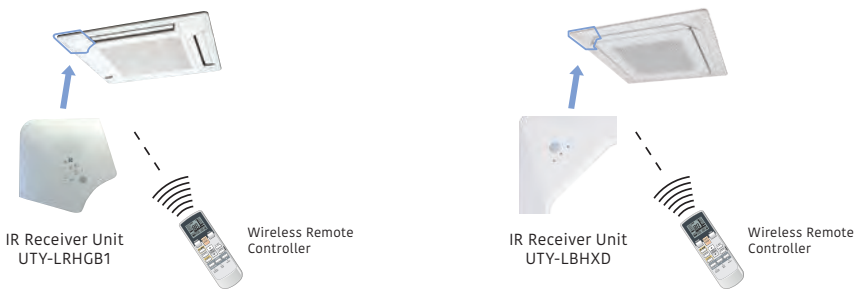

Specifications

< Wireless Remote Controller >

Model name		UTY-LRHGB1	UTY-LBHXD
Power Supply		1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)
Dimensions (H x W x D)	mm	170 × 56 × 19	170 × 56 × 19
Weight	g	85	85

< IR Reciver Unit>

Battery		DC 5V	DC 5V
Dimensions (H x W x D)	mm	193.9 × 193.9 × 31.2	193.9 × 193.9 × 31.2
Weight	g	140	140





# Central remote controller

UTY-DCGGZ3



Up to  
**100** indoor units  
Up to  
**50** group


## For tenants in small to midsize commercial premises

- Individual control and monitoring of up to 100 indoor units
- 7.0inch TFT color screen
- Visually intuitive operation
- Room temperature display by indoor unit sensor & remote controller sensor
- 50 Remote Controller Groups Display & remote controller group rename
- Supports 14 languages: Chinese (Simplified/Traditional), Dutch, English, French, German, Greek, Italian, Polish, Portuguese, Russian, Spanish, Turkish, and Thai (Remote Management only)

## Easy Management

### Air conditioning management by detecting room temperatures of each room

The room temperature detected with indoor unit sensor or remote controller sensor can be displayed. New model can detect the room temperature by indoor units sensors even if wired remote controllers are not connected to the indoor units.

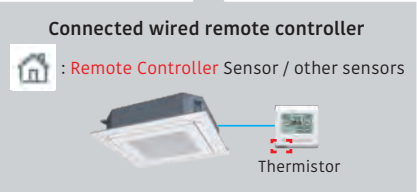

### 50 Remote Controller Groups Display


The group display and the 50 remote controller groups display can be switched easily. Users can choose which display is better, depending on the situation.

Group Display



Manage & Monitor  
by each Groups


50 Remote Controller Groups Display

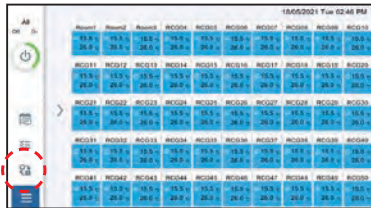

Manage & Monitor  
by 50 Remote Controller Groups


### Remote Controller Groups Rename

The remote controller group names can be changed. Users can know easily where the air conditioning is located by changing the remote controller group names.

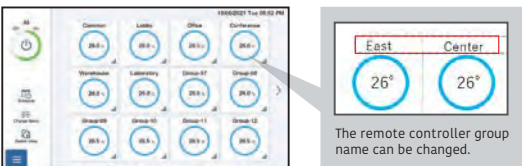


## Features: Central Remote Controller

- Easy intuitive operation from the touch panel display.
- All functions can be accessed through the monitoring screen showing a pop-up window for detailed operation.

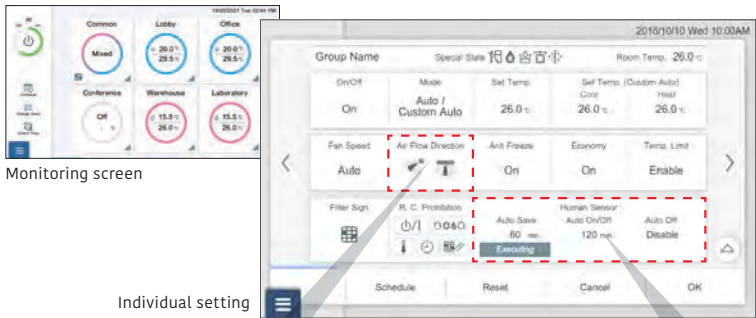


Monitoring screen

Individual setting

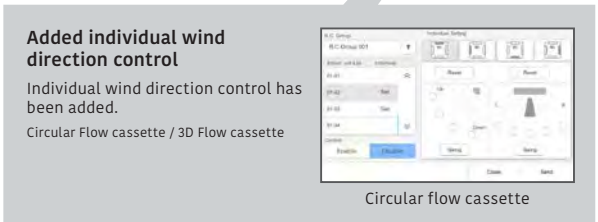

### Added individual wind direction control

Individual wind direction control has been added.  
Circular Flow cassette / 3D Flow cassette

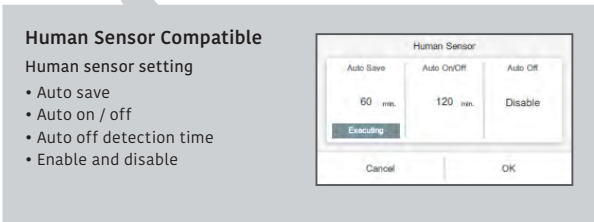

### Human Sensor Compatible

#### Human sensor setting


- Auto save
- Auto on / off
- Auto off detection time
- Enable and disable

## Remote Management

### Remote monitoring / Remote operation

New central remote controller can control your tenant's air conditioner anytime and anywhere. When the central remote controller manages the indoor units of some tenants, air conditioning of each tenants can be managed separately online.


### Increased the Number of Accounts

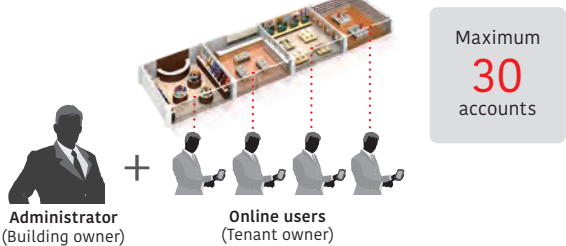

## Remote Management

### Annual schedule

- An annual schedule can be arranged for each remote controller group or user-defined group.
- Allows for the programming of special settings for weekends, holidays, and store closings throughout the year.

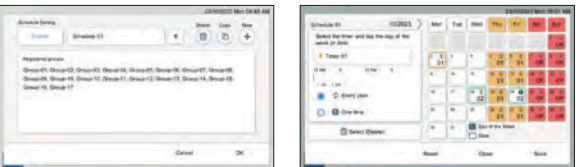

### Specifications

Model name	UTY-DCGGZ3	
Power Supply	100-240 V 50 / 60 Hz	
Dimensions (H x W x D)	mm	134.6 × 216.2 × 37.9
Weight	g	800

### Trouble support function

#### Display error details

Display descriptive explanation when an error occurs



### Sensor value monitoring function

Monitor sensor data of indoor unit / outdoor unit, send mail

### Notify room temperature by email\*

Notify by e-mail when the temperature around the air conditioner is too high or too low

\*:This function is available only when using wired remote controller.

### low noise schedule

Low noise operation of outdoor units can be scheduled.



### Automatic return to set temperature

A function that automatically returns the changed temperature to its original value over time.



# System controller

UTY-APGXZ1 (Software)

Up to  
**4** VRF network systems  
Up to  
**400** outdoor units  
Up to  
**1,600** indoor units

System controller enables advanced integrated monitoring and control of VRF network systems operating in small to large buildings.

- Up to 1,600 indoor units and 400 outdoor units on up to 4 VRF network systems can be controlled.
- To accommodate facility management needs, the system controller offers—in addition to precise air conditioning control—remote central control, electricity charge apportionment, schedule management, and energy-saving options for VRF network systems.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.

# System controller lite

UTY-ALGXZ1 (Software)


Up to  
**1** VRF network systems  
Up to  
**100** outdoor units  
Up to  
**400** indoor units

System controller Lite offers a set of standard functions to manage air conditioners operating in a small or midsize building.

- Up to 400 indoor units and 100 outdoor units on a VRF network system can be controlled.
- In addition to precise air conditioning control, a variety of applications are available as options to offer a wider range of control.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.

## Visually intuitive operation

- **Click & Operate** : The property is shown visually from the perspective most suitable for operation and operated accordingly (Click & Operate). You can select from among the 4 displays of site, building, floor, or list.
- **Freely define groups for batched control** : Indoor units can be freely grouped for simple batched control from a tree menu. Grouping by hierarchal structure, such as by section, division or department is possible.

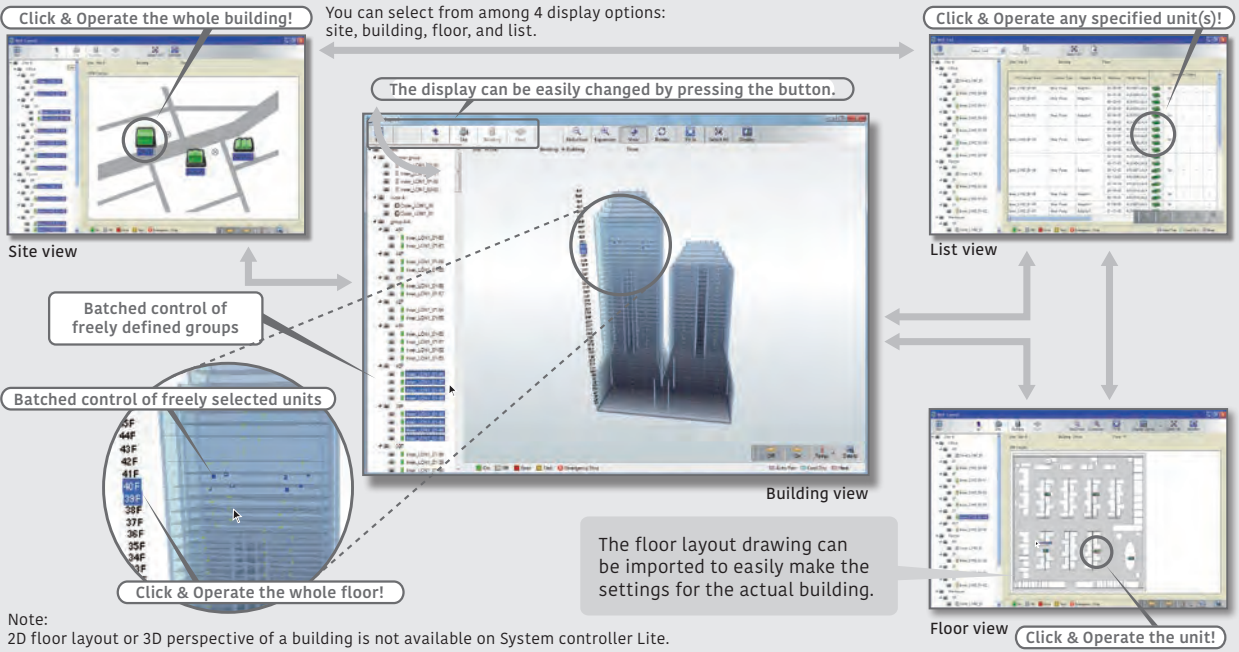


Features: System controller / System controller lite

## 3rd party devices connected by Modbus can be controlled.

**Standard** for System Controller **Option** for System controller Lite UTY-PLGXX2

When a MODBUS® adapter (locally available) is connected to a computer, electrical equipment and devices supported by MODBUS® can be monitored and controlled centrally from the computer. The central control can reduce wasted energy throughout an entire building resulting from a failure to turn equipment off during or after work, as well as reduce the need for on-site patrols.

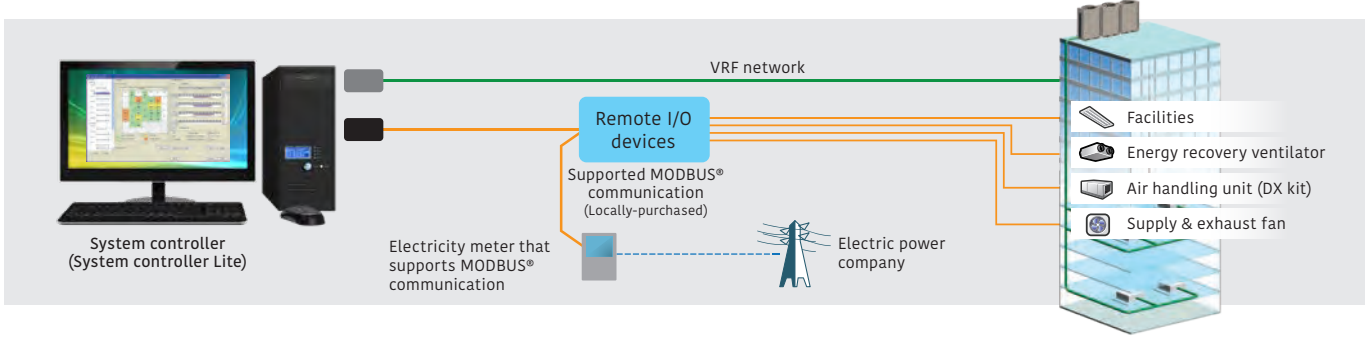


## Wide-ranging operation and data management

**Standard** System controller and System controller Lite

### Schedule management

- An annual schedule can be arranged for each remote controller group or user-defined group.
- ON/OFF, operation mode, remote controller prohibition, and temperature settings can be programmed for up to 143 times per day at 10-minute intervals and for up to 101 configurations for each remote controller group.
- Settings can be programmed for a period that spans midnight.
- Allows for the programming of special settings for weekends, holidays, and store closings throughout the year.
- Low noise operation of outdoor units can be scheduled.

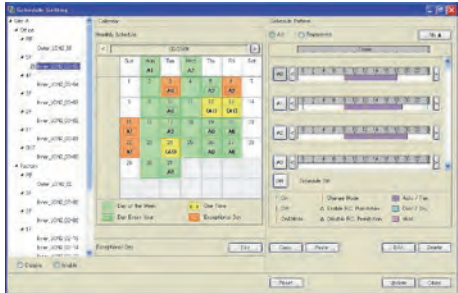

### Wide-ranging control of indoor and outdoor units

- The operation status and mode of each indoor unit are displayed.
- Turn on and off each indoor unit and switch its operation mode.
- Setting temperature range limitation
- Low noise setting of outdoor units

### Remote controller prohibition

Prohibits the operation mode, temperature setting, or ON/OFF of an indoor unit.

### Error alert and e-mail notice

When something goes wrong, an error message is shown in a popup on a computer display with a chime, and an e-mail notice is sent. Errors of the past one year are logged and can be reviewed.

### Operation and control history

A history of operation status and control can be maintained and retrieved.

### Importing and exporting databases

Only an administrator is authorized to import and export registration, layout, and image data.

### Automatic clock adjustment


Time can be set for all controllers in batch automatically.

## Electricity charge apportionment

**Standard** on System controller  
**Option** System controller Lite UTY-PLGXA2

### Electricity charge apportionment method

This is a method to calculate monthly energy costs to be allocated to each tenant based on the amount of energy used by their air conditioners. The first step is to determine exactly how much energy is consumed by air conditioners in each tenant space. The second step is to divide the total energy charge billed by an electric power company based on the amount of energy used by each tenant to determine the energy cost to be allocated to each of them. (See figure on right)  
The calculation takes into consideration such factors as the number of unused rooms and nighttime electricity rate, which are shown in detail on an energy cost allocation schedule.

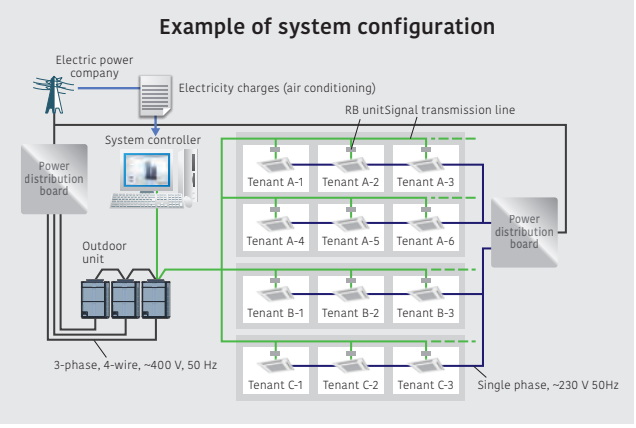

VRF Control Systems Centralized Controller


Features: System controller / System controller lite

Remote monitoring management


- Standard on System controller
- Option System controller Lite UTY-PLGXR2

The System controller can be used on site or remotely over networks for remote central control. The System controller requires 2 software programs working together: The VRF controller runs on site and communicates with the VRF system; The VRF explorer, which runs at a remote location, provides a user interface and communicates with the VRF controller. The VRF controller and the VRF explorer run on a single computer or on different computers connected on a network. A computer running VRF explorer can centrally control up to 10 VRF system sites having up to 20 buildings each.

On site central control

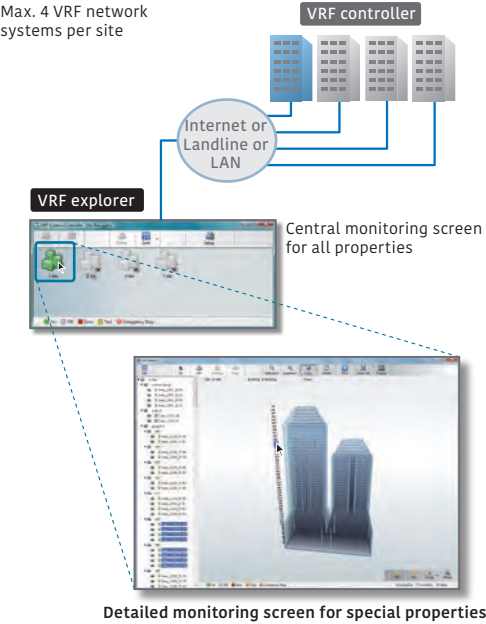


Remote central control

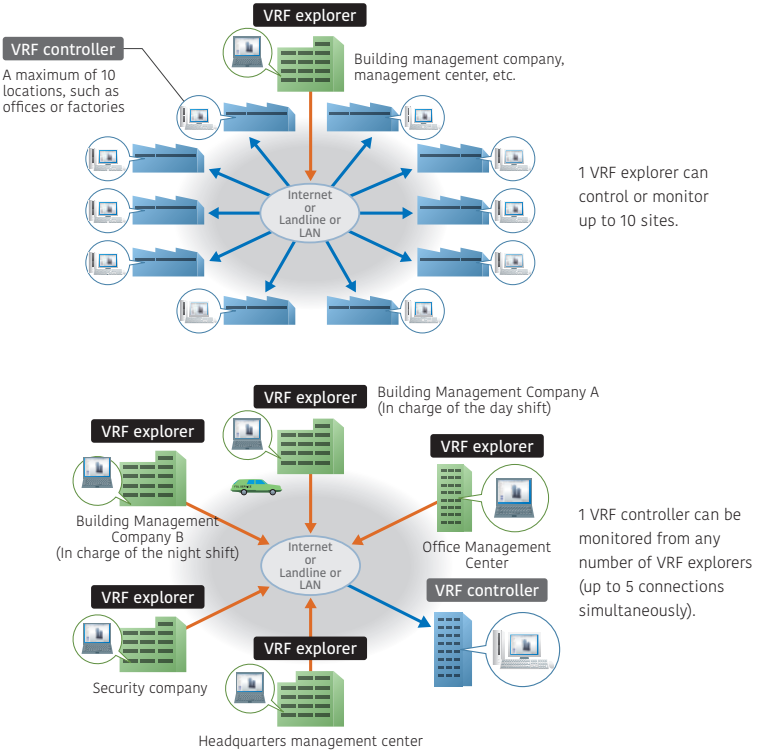

Energy-saving management

- Option System controller UTY-PEGXZ1
- Option System controller Lite UTY-PLGXE2

A variety of energy-saving options can be selected depending on the season, weather, and time of day. Excellent energy-saving operation is performed while keeping users comfortable.

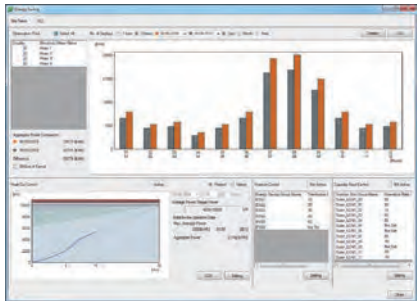

Main screen for energy-saving management

Energy saving graph data: This chart compares the energy consumption for the current month with the previous month and with the same month of the previous year to keep track of the energy-saving performance.

Indoor unit rotation

Indoor units can be automatically rotated to operate within a group in accordance with a predetermined annual schedule to reduce power consumption while keeping users comfortable. The operation stoppage rate can be selected for an indoor unit.

Peak-cut mode

The system controller monitors the connected power meter and controls the energy to maintain the target power consumption set for each time period by changing the set temperature of the indoor units or turning off the thermostat so as to keep the users comfortable. Indoor units to be controlled can be grouped in many ways, and the control level can be set for each group.

Capacity saving for outdoor unit

The upper limit on the capacity of an outdoor unit can be adjusted to reduce power consumption during a hot summer or cold winter by averaging out the power-saving performance of each refrigerant system. The upper limit on capacity can be set at 50% of the rated capacity or more.

Summary of functions

Functions	Type	System controller		System controller Lite				
		UTY-APGXZ1	Option UTY-PEGXZ1	UTY-ALGXZ1	Option UTY-PLGXR2	Option UTY-PLGXA2	Option UTY-PLGXE2	Option UTY-PLGXX2
Specifications	Max. number of VRF networks supported	4	-	1	-	-	-	-
	Max. number of indoor unit and remote controller groups per VRF network	400	-	400	-	-	-	-
	Max. number of outdoor units per VRF network	100	-	100	-	-	-	-
	Max. number of indoor units and remote controller groups per System controller	1600	-	400	-	-	-	-
	Max. number of outdoor units per System controller	400	-	100	-	-	-	-
Site supervision	Multiple site display	10	-	10	-	-	-	-
	Number of buildings per site	20	-	-	-	-	-	-
	Number of floors per site	200	-	-	-	-	-	-
	Number of floors per building	50	-	-	-	-	-	-
	3D graphical layout view	●	-	-	-	-	-	-
	2D graphical layout view	●	-	-	-	-	-	-
	List display	●	-	●	-	-	-	-
	Tree display	●	-	-	-	-	-	-
Error management	Group display	●	-	●	-	-	-	-
	Error notification	●	-	●	-	-	-	-
	Audible alarm	●	-	●	-	-	-	-
	E-mail notification of errors	●	-	●	-	-	-	-
History	Error history	●	-	●	-	-	-	-
	Operation history	●	-	●	-	-	-	-
	Control history	●	-	●	-	-	-	-
Operation control	Individual control	ON/OFF	-	●	-	-	-	-
		Operation mode*	-	●	-	-	-	-
		Room temperature	-	●	-	-	-	-
		Fan speed	-	●	-	-	-	-
		Airflow direction	-	●	-	-	-	-
		Economy mode	-	●	-	-	-	-
		Setting temperature range limitation	-	●	-	-	-	-
		Anti-freeze	-	●	-	-	-	-
		Low noise setting of outdoor units	-	●	-	-	-	-
		Remote controller prohibition	-	●	-	-	-	-
	Individual management	Setting temperature range limitation	-	●	-	-	-	-
		Filter sign reset	-	●	-	-	-	-
	Other	memory operations	-	●	-	-	-	-
		Pattern operations	-	●	-	-	-	-
		Annual Schedule	-	●	-	-	-	-
Schedule	Setting for a specific date	-	-	●	-	-	-	-
	ON/OFF per day	72	-	72	-	-	-	-
	ON/OFF per week	504	-	504	-	-	-	-
	Day off	●	-	●	-	-	-	-
	Minimum unit of timer setting (minutes)	10	-	10	-	-	-	-
	Weekly schedule for low noise mode	-	-	●	-	-	-	-
	Web Operation	-	-	●	-	-	-	-
Remote monitoring management	Remote monitoring	-	-	-	●	-	-	-
	Remote operation control	-	-	-	●	-	-	-
	Remote function setting	-	-	-	●	-	-	-
	Apportionment charge/bill calculation	-	-	-	-	●	-	-
Electricity charge apportionment	Tenant (block) setting	-	-	-	-	●	-	-
	Common facilities apportionment setting	-	-	-	-	●	-	-
	Rated power consumption allotment	-	-	-	-	●	-	-
	Individual calculations for cooling and heating	-	-	-	-	●	-	-
	Electricity meter supported	-	●	-	-	●	-	-
Energy-saving management	Indoor unit rotation	-	●	-	-	-	●	-
	Peak cut control	-	●	-	-	-	●	-
	Capacity saving for outdoor unit	-	●	-	-	-	●	-
	Record of energy-saving operation	-	●	-	-	-	●	-
	Information on energy saving	-	●	-	-	-	●	-
	Power consumption monitor	-	●	-	-	-	●	-
Control of external devices	Electricity meter supported	-	●	-	-	-	●	-
	Monitor	●	-	-	-	-	-	●
Others	Control	●	-	-	-	-	-	●
	Importing and exporting databases	●	-	●	-	-	-	-
	Automatic clock adjustment	●	-	●	-	-	-	-
	Multiple language support	7 languages	-	7 languages	-	-	-	-
	Refrigerant leak detector	●	-	●	-	-	-	-
	Power shutdown	●	-	●	-	-	-	-
		●	-	●	-	-	-	-

●●: Available - : Not available

Computer requirements

The specifications required for the computer are shown in the table below:

	System controller	System controller Lite
Operating system	• Microsoft Windows 10 Home (64-bit) • Microsoft Windows 10 Pro (64-bit) • Microsoft Windows 11 Home (64-bit) • Microsoft Windows 11 Pro (64-bit)	Supported languages: English, Chinese, French, German, Russian, Spanish, and Polish
CPU	Intel Core i3 2 GHz or higher	
Memory	• 4 GB or more (for Windows 10) • 8 GB or more (for Windows 11)	
HDD	40 GB or more of free space	
Displayed items	1,024 × 768 or higher resolution	
Interfaces	• Ethernet port (for getting access to the Internet using LAN) or Modem (for getting access to the Internet using public telephone line) • USB ports (Maximum of 5 ports) (Required only for the server PC that works as VRF controller) - Maximum of 1 USB ports are required for WHITE-USB-KEY connection - Maximum of 4 USB ports are required for Echelon U10 USB/U60-FT DIN Network Interface NOTE: Maximum number of required USB ports depends on the applicable system configuration.	• Ethernet port (for getting access to the Internet using LAN) or Modem (for getting access to the Internet using public telephone line) • USB ports (Maximum of 2 ports) (Required only for the server PC that works as VRF controller) - 1 USB port is required for WHITE-USB-KEY connection - 1 USB port is required for Echelon U10 USB/U60-FT DIN Network Interface NOTE: Maximum number of required USB ports depends on the applicable system configuration.
Graphic accelerator	Microsoft DirectX 9.0c compatible	
Software	Adobe Reader 9.0 or later	

- Transmission adapter (Required for each VRF network):
  - Echelon U10 USB Network Interface - TP/FT-10 Channel (Model number: 75010R)
  - Echelon U60-FT DIN Network Interface (Model number: 75060R-40)

<PACKING LIST>

Type	For System controller		For System controller Lite				
	System controller	Option Energy manager	System controller Lite	Remote access	Option Electricity charge apportionment	Energy saving	Centralized control
Model name	UTY-APGXZ1	UTY-PEGXZ1	UTY-ALGXZ1	UTY-PLGXR2	UTY-PLGXA2	UTY-PLGXE2	UTY-PLGXX2
White-USB-key	1	1	1		1	1	1

\*1: Software protection key to be inserted in a USB slot running System controller or System controller Lite. System controller or System controller Lite may only run on a PC with a WHITE-USB-KEY. However, a WHITE-USB-KEY is not required for remote VRF explorer software.



BACnet® gateway


UTY-ABGXZ1 Software



Up to  
**4** VRF network systems  
Up to  
**400** outdoor units  
Up to  
**1,600** indoor units

- It is possible to connect medium to large sized BMS to VRF network system via BACnet®, a global standard for open networks.
- A maximum of 1600 indoor units with 4 VRF network systems (a maximum of 400 indoor units & 100 outdoor units for one network system) can be connected to one BACnet® Gateway.
- It is possible to control or monitor VRF network system from BMS via BACnet® Gateway.
- Compatible with BACnet® (ANSI / ASHRAE-135-2014) application specific controller (B-ASC).
- Compatible with BACnet®/IP over Ethernet.
- Scheduling function, Alarm & Event functions as well as Electricity Change Apportionment function are provided in BACnet® Gateway.
- Connection between VRF network system to personal computer is possible via small U10 USB interface. However, both U10 USB interface & personal computer are field supplied items.
- Corresponds to 7 different languages, English, Chinese, French, German, Spanish, Russian, Polish.

Installation example

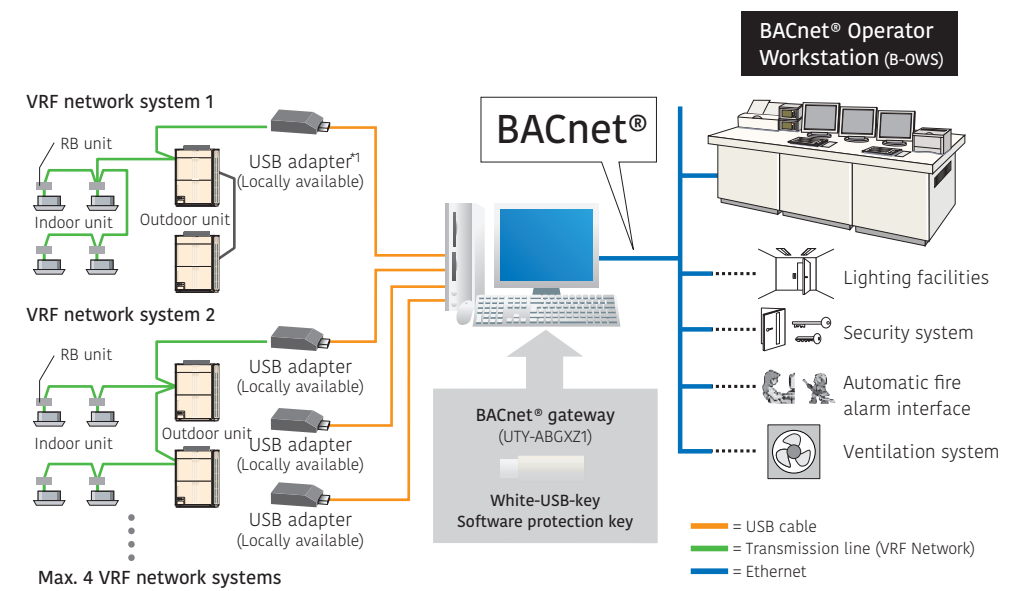

\*1: U10 USB network interface available from Echelon® Corporation.

Computer requirements

	UTY-ABGXZ1
Operating system	<ul style="list-style-type: none"><li>• Microsoft Windows 10 Home (64-bit)</li><li>• Microsoft Windows 10 Pro (64-bit)</li><li>• Microsoft Windows 11 Home (64-bit)</li><li>• Microsoft Windows 11 Pro (64-bit)</li></ul> Supported languages: English, Chinese, French, German, Russian, Spanish, and Polish
CPU	Intel Core i3 2 GHz or higher
Memory	<ul style="list-style-type: none"><li>• 4 GB or more (for Windows 10)</li><li>• 8 GB or more (for Windows 11)</li></ul>
HDD	40 GB or more of free space
Display	1,024 × 768 or higher resolution
Interface	<ul style="list-style-type: none"><li>• Ethernet port (for getting access to the Internet using LAN) or Modem (for getting access to the Internet using public telephone line)</li><li>• USB ports (Maximum of 5 ports) (Required only for the server PC that works as VRF controller)<ul style="list-style-type: none"><li>– Maximum of 1 USB ports are required for WHITE-USB-KEY connection</li><li>– Maximum of 4 USB ports are required for Echelon U10 USB/U60-FT DIN Network Interface</li></ul></li></ul> NOTE: Maximum number of required USB ports depends on the applicable system configuration.
Software	Adobe Reader 9.0 or later

- Transmission adapter (Required for each VRF network):
  - Echelon U10 USB Network Interface – TP/FT-10 Channel (Model number: 75010R)
  - Echelon U60-FT DIN Network Interface (Model number: 75060R-40)

<PACKING LIST>

Name and shape	Quantity	Application
White-USB-key (Software protection key with software)	1	Includes the software and manuals of tool for BACnet Gateway. Additionally, it works as the software protection key. Software protection key to be connected to an USB port on the PC that the BACnet Gateway is installed. BACnet Gateway runs only on a PC with this WHITE-USB-KEY.

BACnet® gateway


UTY-VBGX Hardware



Up to  
**1** VRF network systems  
Up to  
**32** refrigerant systems  
Up to  
**128** indoor units

- BACnet® Gateway enables to connect a BMS and FG VRF system.
- A maximum of 128 indoor units and 32 refrigerant system can be connected to a single BACnet® Gateway.
- Compatible with BACnet® (ANSI / ASHRAE-135-2012) application specific controller (B-ASC).
- Compatible with BACnet®/IP over Ethernet.


Installation example

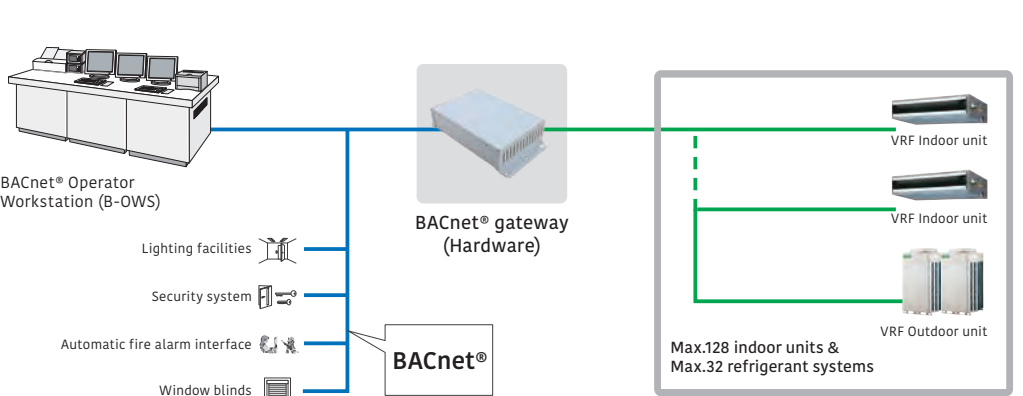

Specifications

Model name	UTY-VBGX	
Power Supply	100-240V 50/60Hz, single phase	
Power Consumption	W	4.6 (max)
Dimensions (H x W x D)	mm	59.6 × 270.4 × 176
Weight	g	1,200
Number of controllable indoor units	128	
Number of controllable refrigerant system	32	
Number of controllable VRF network	1	
Number of connectable units / one VRF etwork	4	


**MODBUS® convertor** for VRF  
UTY-VMGX (Hardware)



Up to  
**9** units per VRF system  
Up to  
**100** outdoor units  
Up to  
**128** indoor units

The MODOBUS Converter allows a complete integration of air conditioners into MODBUS Networks.

- Compact and lightweight design
- Direct connection to MODBUS Network
- Up to 128 indoor units can be controlled in one MODBUS Converter
- The MODBUS Converter permits central monitoring and control of air conditioners from BMS or Central Controller.

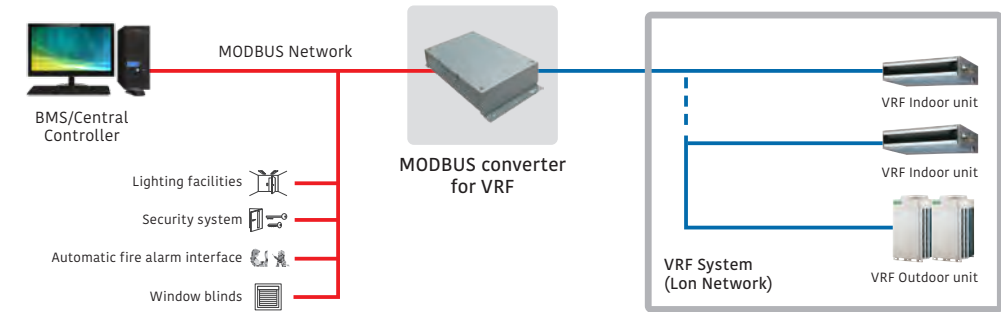

\* BMS: Building Management System

Specifications		UTY-VMGX
Model name		UTY-VMGX
Power Supply		220-240V 50/60Hz
Input power	W	Max. 2
Dimensions (H x W x D)	mm	54 × 260 × 150
Weight	g	1,100


**MODBUS® Interface**  
UTY-VKGX



Up to  
**1** indoor units


The Modbus Interface allows a complete integration of air conditioners into Modbus Networks.

- Simple installation due to small and compact size.
- No separate external power supply required.
- The Modbus Interface permits central monitoring and control of air conditioners from BMS.

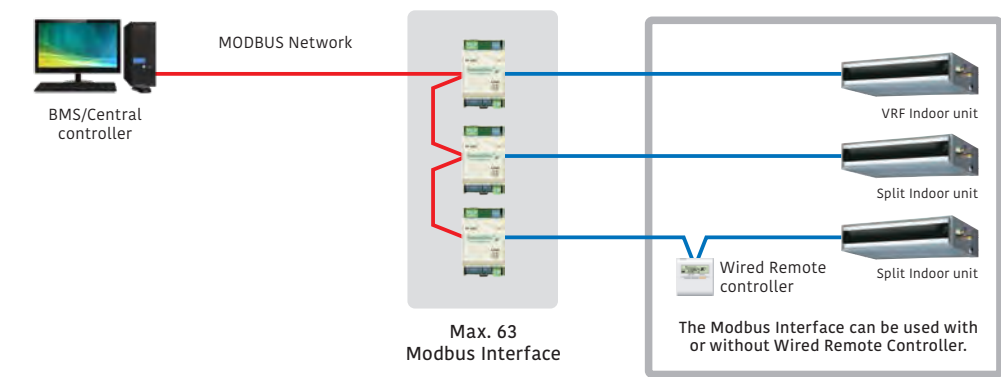

Specifications		FJ-RC-MBS-1
Model name		FJ-RC-MBS-1
Dimensions (H x W x D)	mm	93 × 53 × 58
Weight	g	85


**KNX® converter** for VRF  
UTY-VKGX (Hardware)



Up to  
**100** outdoor units  
Up to  
**128** indoor units

It is possible to control the VRF system from central / home controller via KNX network.

- New KNX Converter enables to connect central/home controller and FG VRF system.
- A maximum of 128 indoor units and 100 outdoor units can be connected to single KNX Converter.

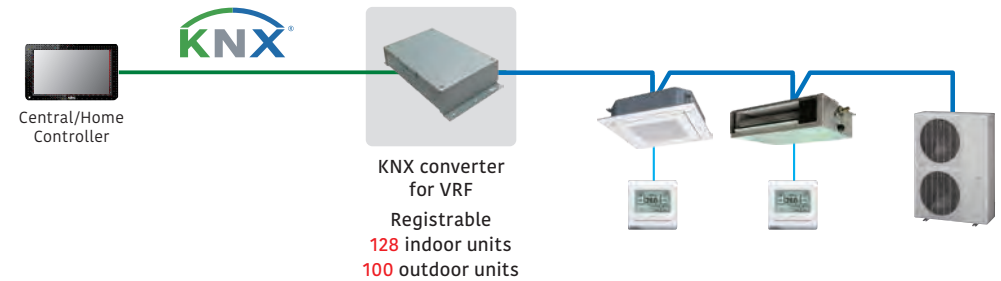

Specifications		UTY-VKGX
Model name		UTY-VKGX
Power Supply		220-240V 50/60Hz
Input power	W	1.5
Dimensions (H x W x D)	mm	54 × 260 × 150
Weight	g	1,200


**KNX® Interface**  
FJ-RC-KNX-1i



Up to  
**1** indoor units

The KNX Interface allows a complete integration of air conditioners with KNX Network systems.

- Simple installation due to small and compact size.
- No separate external power supply required (just KNX bus power).
- Can be used for single indoor units and group controlled (up to 16) indoor units

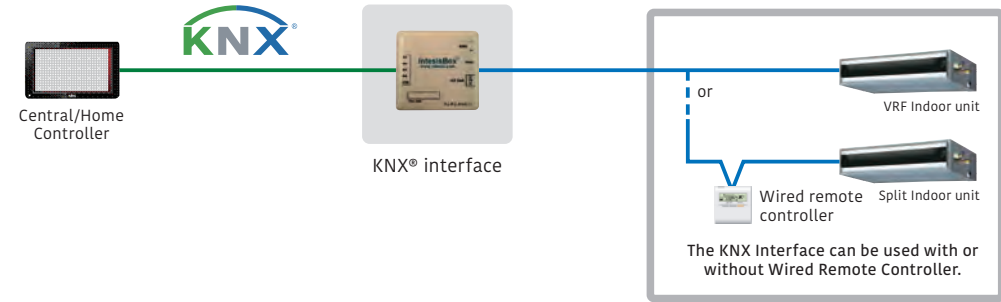

Specifications		FJ-RC-KNX-1i
Model name		FJ-RC-KNX-1i
Dimensions (H x W x D)	mm	70 × 70 × 28
Weight	g	70



Wireless LAN Adapter


FJ-RC-WIFI-1



Up to  
1 Single indoor unit



- It is the most advanced solution to remotely manage an Air Conditioning system using all sort of mobile devices such as Smartphones, Tablets and PC
- No separate external power supply required
- Can be used for single indoor units and group controlled (up to 16) indoor units

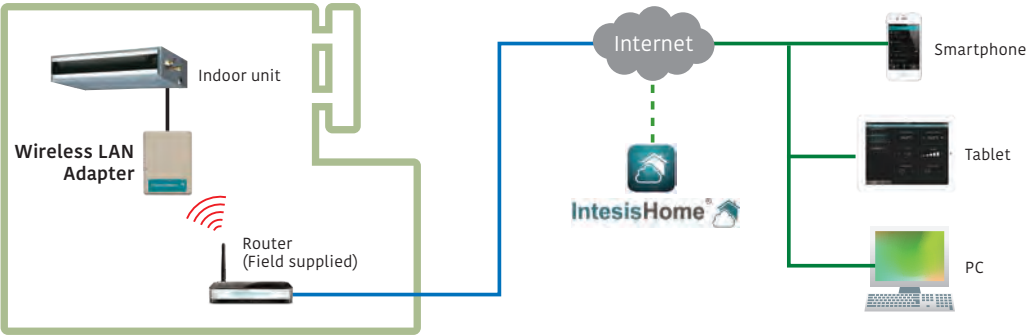

Basic control

- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed setting
- Louver position (Airflow direction setting)
- Room temperature display
- Set temperature control
- Multi Language
- One Scene and Timer



(Application screen image)

Notifications and History

- Alerts e-mail notification (future release)
- Air conditioning malfunction alerts
- Connectivity monitoring and alerts
- History (future release)

Advanced control (Optional functions)

- Climate working modes (ECO, Comfort, Powerful) (future release)
- Schedulable functionalities (ON/OFF, Modes, Set point temperature, Fan Speed, Louver position)
- Set temperature limitation (future release)
- Multiple Scenes & Timers and Calendar function

Specifications


Model name		FJ-RC-WIFI-1
Dimensions (H x W x D)	mm	108 × 70 × 28
Weight	g	80

Network converter

UTY-VTGX / UTY-VTGXV



UTY-VTGX  
DC power supply type



UTY-VTGXV  
AC power supply type


Up to  
16 single indoor units  
Up to  
1 group  
Up to  
100 Network Converters

Compact remote controller provides access to basic functions


- The network converters are required when connecting single split system to VRF network system.
- Compact and light weight design
- Connectable to both types of 2-wire and 3-wire remote controllers

Installation example


- 2 types of 1 remote controller type and 2 remote controllers type are available.
- Power supply (AC220-240V, 50/60Hz) is required for 2 remote controllers type.

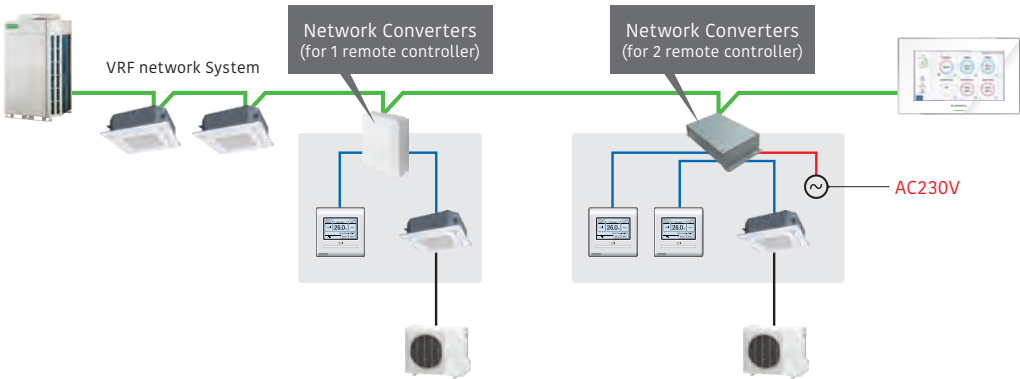

- 2-wire and 3-wire type of the wired remote controller can be connectable.

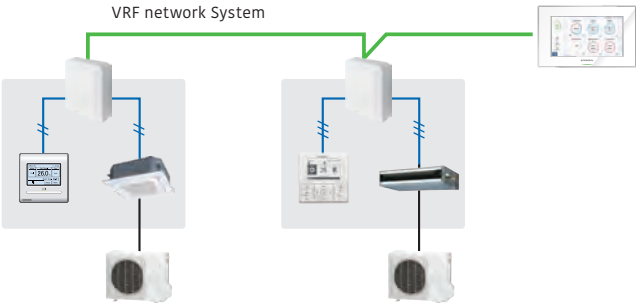

- A central control can be provided for the single split systems. (Up to 100 units of Network Converter is connectable in one VRF network system)

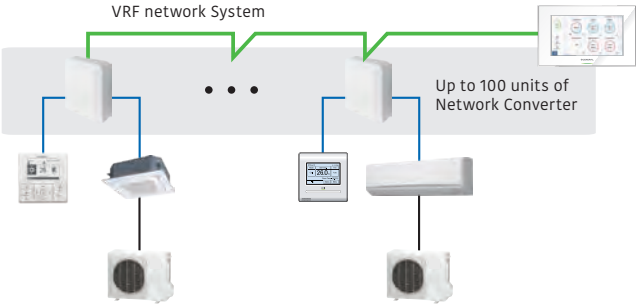

Specifications

Model name		UTY-VTGX		UTY-VTGXV
Power Supply		polar 3-wire DC12V	non-polar 2-wire DC12V	220-240V 50/60Hz, Single phase
Input power		W	Max. 1.2	Max. 3
Dimensions (H x W x D)		mm	140 × 117 × 43	54 × 260 × 150
Weight		g	250	1,100

External switch controller

UTY-TERX




Up to 1 group

- In combination with a field supply Card-Key Switch or other sensor, the External Switch Controller allows control of the ON / OFF, Room temperature, Fan speed and Master control functions. This makes this product suitable for installations such as hotel rooms.
- Card-key or other sensor switches are available as a locally purchased parts.
- The set temperature can be specified at two points for cooling and heating individually (4 points).

Installation example

Human sensor catches movements of people in a room, and operates with lower capacity when people come back to the room, it automatically returns to previous operation mode.

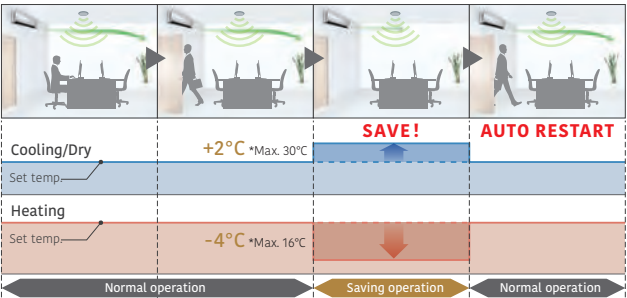

Human sensor equipment needs to be purchased locally. The above example indicated that a signal is sent to this External Switch Controller if human sensor does not detect for 20 minutes. Human sensor is not mounted on the External Switch Controller.


Specifications

Model name	UTY-TERX		
Power Supply	DC 6.5-16V		
Dimensions (H x W x D)	mm	140 × 117 × 43	
Weight	g	250	

DC12V is supplied by indoor unit.


Signal amplifier

UTY-VSGXZ1



- Transmission Line length can be extended up to 3,600m with multiple Signal Amplifiers.
- Up to 40 signal amplifiers can be installed in a VRF network system.
- A signal amplifier is required,
  - (1) When the total wiring length of the transmission line exceeds 500m.
  - (2) When the total number of units on the transmission line exceeds 64.

Installation example

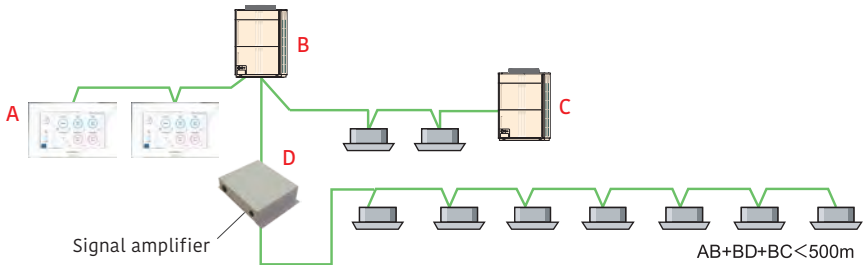


Specifications

Model name	UTY-VSGXZ1		
Power Supply	208-240V 50/60Hz, Single phase		
Input power	W	4.5	
Dimensions (H x W x D)	mm	67 × 288 × 211	
Weight	g	1,500	

Thermostat Converter

UTY-TTRXZ1




Up to 16 indoor unit

Control air conditioner using third party thermostat

- Thermostat converter can control Fujitsu General products using a third party thermostat. Up to 16 indoor unit can be connected with one thermostat converter.

Installation example

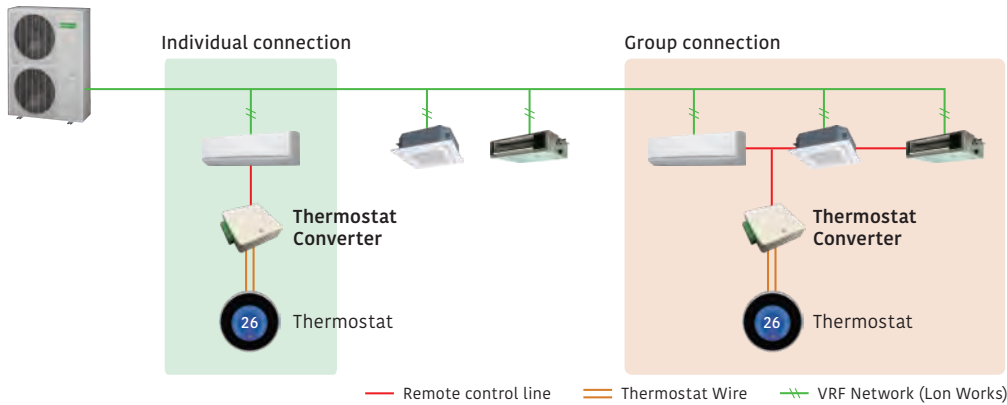

Function

Air Conditioning Control	ON/OFF	Indoor unit Error notification*
	Operation mode	
	Room Temperature	
	Fan Speed	Converter Error notification*
	Delay OFF	

\*These function are displayed on the converter's PCB board.

Specifications

Model name	UTY-TTRXZ1		
Max. Connectable Indoor Unit	16		
Input power (Max.)	W	0.6	
Dimensions (H x W x D)	mm	27 × 86.7 × 86.7	
Weight	g	220	



# VRF OPTION

Pressure Sensor Kit  
Auto Louver Grille Kit  
CONTROL SYSTEM LIST  
OPTIONAL PARTS LIST  
OPTIONAL PARTS  
FUNCTION LIST  
SEPARATION TUBE etc.

**Diverse building air conditioning control functions can be controlled easily by VRF options.**

Various kinds of optional parts are provided such as controllers, adaptors and converters to meet the needs of every user.


Pressure sensor kit

UTY-SPWX




Design Flexibility

The height difference between the outdoor unit and the indoor unit is usually 50 m for the VC-V and V-III Tropical Series, but by installing the pressure sensor kit it is possible to expand it to 110 m.

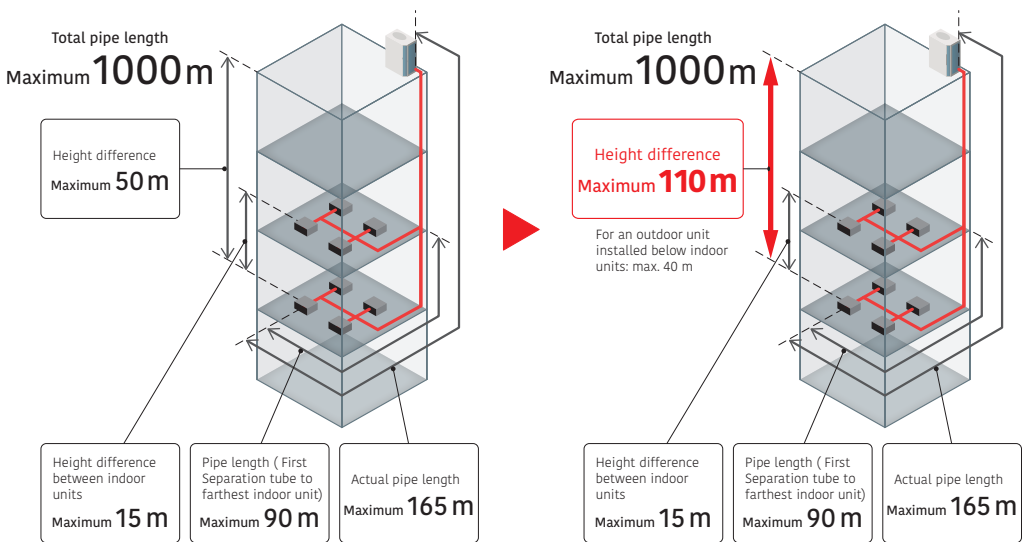

System overview

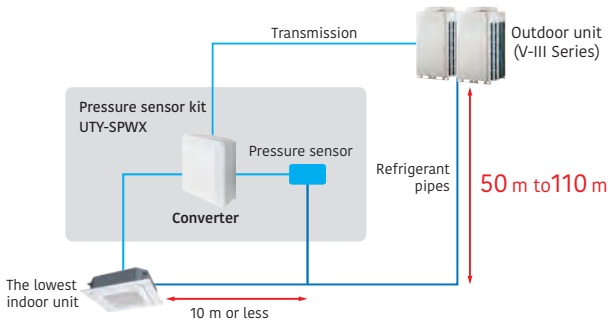

Pressure sensor kit

Pressure sensor kit (Converter)	Refrigerant pressure sensor	Joint pipe

Specifications

Model name	UTY-SPWX	
Power Supply	DC16-9	
Dimensions (H x W x D)	mm	140 x 117 x 43
Weight	g	200

Auto louver grille kit

UTD-GXTA-W / UTD-GXTB-W / UTD-GXTC-W




The optional clean-looking flat Auto louver grille kit blends into any interior and provides a comfortable airflow.




Flexible Control

- Operation with indoor unit  
Auto Louver can be operated by synchronizing remote controller of indoor unit.
- UP and Down auto swing
- Auto airflow direction and auto swing
- 4 steps selectable
- Auto-closing louver  
When operation of indoor unit is stopped, the louver will automatically close.

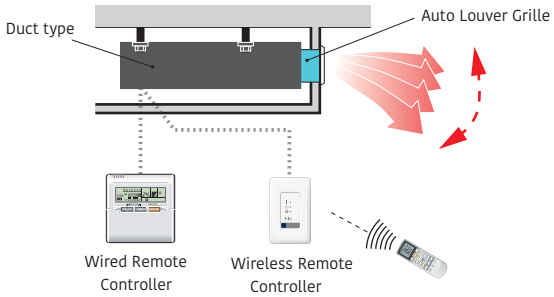

Dimensions

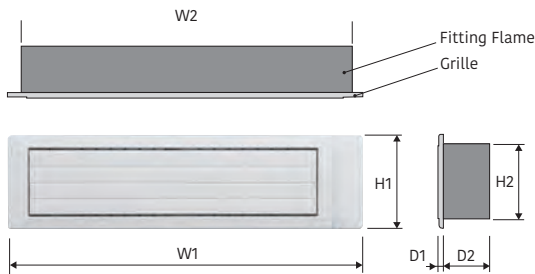

Unit: mm						
Model name	W1	W2	H1	H2	D1	D2
UTD-GXTA-W	683	645	180	148	9	84
UTD-GXTB-W	883	845				
UTD-GXTC-W	1,083	1,045				

Specifications

















Model name			UTD-GXTA-W		UTD-GXTB-W		UTD-GXTC-W	
Applicable Indoor Unit			ARGD07/09/12/14GATH ARGK07/09/12/14GCLH ARGK07/09/12/14GALH		ARGD18GATH ARGK18GCLH ARGK18GALH		ARGD24GATH ARGK24GCLH ARGK24GALH	
Power source			Connecting with Control box of indoor unit					
Fixing of Auto Louver Grille			Screw fixing to Flange or Square Duct					
Extension Square Duct Limit			1.0m (Max. duct length between indoor unit and Grille)					
Dimensions (H × W × D)		mm	180 × 683 × (84+9)		180 × 883 × (84+9)		180 × 1083 × (84+9)	
Weight	Net	kg	2.0		2.5		3.0	
	Gross		3.0		3.5		4.0	
Color			White					
Louver Motor			Stepping Motor					
Accessories			Fitting Flame, etc.					
Operating range	Cooling	°C	18 to 32					
		% RH	80% or less					
	Heating	°C	16 to 30					

\*: The Auto Louver Grille Kit can also be installed to ARGD07/09/12/14/18/24GATH revision code B models. Please refer to the Design & Technical manual for "revision code " details.



CONTROL SYSTEM LIST for VC-V





















Controllers / Interface

Type			Indoor unit																	
			Indoor unit					Indoor unit				Indoor unit								
			One-way Flow	3D Flow	Cassette Compact Grid type / Standard type	Slim type	Large type	Duct			Duct		Ceiling / Floor	Ceiling	Wall Mounted					
						Circular Flow		Mini (With drain pump)	Mini (Without drain pump)	Low Static Pressure  Slim (With drain pump)	Medium Static Pressure	High Static Pressure			—	EEV external		—		
			AUGV 007/012/014/ 018/024 GLEH-U	AUGS 018/024 GLEH-U	AUGB 007/009/012/ 014/018/024 GLEH-U, AUGB 007/009/012/ 014/018/024 GTEH-U	AUGN 009/012/014/ 018/024 GLAH-U, AUGM018GTEH-U	AUGK 018/024/030/ 034/036/045/054 GLEH-U, AUGK 018/024/030/ 034/036/045/054 GTEH-U	ARGK 007/009/012/ 014/018/024 GLGH-U	ARGK 007/009/012/ 014/018/024 GLHH-U	ARGD 007/009/012/ 014/018/024 GLEH-U, ARGD 007/009/012/ 014/018/024 GTEH-U	ARGA 024/030/036/045 GLEH-U, ARGA 024/030/036/045 GTEH-U	ARGC 036/045/060/ 072/090/096 GTEH-U	ABGA 012/014/018/024 GTEH-U	ABGA 030/036/045/054 GTEH-U	ASGA 007/009/012/014 GCCG-U	ASGE 007/009/012/014 GCEH-U	ASGA 18/24GBCH-U	ASGA 030/034GTEH-U		
Controllers	Wired Remote Controller		● UTY-RVRG														● UTY-RVRG			
			● UTY-RNRGZ5														● UTY-RNRGZ5			
			● UTY-RLRG														● UTY-RLRG			
	Compact Wired Remote Controller		● UTY-RCRGZ1, UTY-RCRGZ1K, UTY-RCRGZ1B														● UTY-RCRGZ1, UTY-RCRGZ1K, UTY-RCRGZ1B			
	Simple Remote Controller		● UTY-RSRG, UTY-RHRG														● UTY-RSRG, UTY-RHRG			
	Wireless Remote Controller		● UTY-LNHGU														● UTY-LNHGU			
	Central Remote Controller		● UTY-DCGGZ3														● UTY-DCGGZ3			
	System Controller, System Controller Lite		● UTY-APGXZ1, UTY-ALGXZ1														● UTY-APGXZ1, UTY-ALGXZ1			
	IR Receiver Unit		● UTY-TRHX		● UTY-LBHXD	● UTY-TRHX	● UTY-TRHX	● UTY-TRHX UTB-YWC	● UTY-TRHX											
Interface	BACnet Gateway		● UTY-ABGXZ1, UTY-VBGX														● UTY-ABGXZ1, UTY-VBGX			
	MODBUS Converter		● UTY-VMGX FG-TL-MBS16Z1														● UTY-VMGX FG-TL-MBS16Z1			
	KNX Convertor		● UTY-VKGX														● UTY-VKGX			
	Wireless LAN Interface		● UTY-TFSXJ3				● UTY-TFSXJ3				● UTY-TFSXJ3 (036/072/090/096)		● UTY-TFSXJ3					● UTY-TFSXJ3		
	External Switch Controller		● UTY-TERX														● UTY-TERX			
	Network Converter for single split		● UTY-VTGX, UTY-VTGXV														● UTY-VTGX, UTY-VTGXV			
	Thermostat Converter		● UTY-TTRXZ1														● UTY-TTRXZ1			

# CONTROL SYSTEM LIST

for V-III Tropical and J-III Tropical















Controllers / Interface

Type			Indoor unit											
			Cassette					Duct					Indoor unit	
			4-way Compact	4-way		Circular Flow		Mini (With drain pump)	Mini (Without drain pump)	Slim (With drain pump)	Medium Static Pressure	Duct High Static Pressure		Ceiling / Floor
			AUGB 07/09/12/14/18/24 GALH, AUGB 07/09/12/14/18/24 GATH	AUGD 18/24GALH	AUGA 18/24/30/ 36/45/54 GALH	AUGM 018/024GTAH	AUGK 018/024/030/034/ 036/045/054 GTAH	ARGK 07/09/12/14/18/24 GCLH	ARGK 07/09/12/14/18/24 GALH	ARGD 07/09/12/14/18/24 GATH	ARGA 24/30/36/45 GBTH	ARGC 36/72/90 GBTH, ARGC 96GATH	ARGC 45/60/72/90 GATH	ABHA 12/14/18/24 GATH
Controllers	Wired Remote Controller		● UTY-RVRG											
			● UTY-RNRGZ5											
			● UTY-RLRG											
	Compact Wired Remote Controller		● UTY-RCRGZ1, UTY-RCRGZ1K, UTY-RCRGZ1B											
	Simple Remote Controller	 2-wire type  3-wire type	● UTY-RSRG, UTY-RHRG, UTY-RSKG, UTY-RHKG											
	Wireless Remote Controller		● UTY-LNHGU											
	Central Remote Controller		● UTY-DCGGZ3											
	System Controller, System Controller Lite		● UTY-APGXZ1, UTY-ALGXZ1											
Interface	IR Receiver Unit			● UTY-LRHGB1		● UTY-LBHXD		● UTB-YWC			● UTB-YWC			
	BACnet Gateway		● UTY-ABGXZ1, UTY-VBGX											
	MODBUS Converter		● UTY-VMGX											
	MODBUS Interface		● FJ-RC-MBS-1					● FJ-RC-MBS-1		● FJ-RC-MBS-1		● FJ-RC-MBS-1 (ARXC45/60/72/90/96GATH only)		● FJ-RC-MBS-1
	KNX Convertor		● UTY-VKGX											
	KNX Interface		● FJ-RC-KNX-1i					● FJ-RC-KNX-1i		● FJ-RC-KNX-1i		● FJ-RC-KNX-1i (ARXC45/60/72/90/96GATH only)		● FJ-RC-KNX-1i
	Wireless LAN Interface		● FJ-RC-WIFI-1					● FJ-RC-WIFI-1		● FJ-RC-WIFI-1		● FJ-RC-WIFI-1 (ARXC45/60/72/90/96GATH only)		● FJ-RC-WIFI-1
	External Switch Controller		● UTY-TERX											
	Network Converter for single split	 DC Power Supply Type  AC Power Supply Type	● UTY-VTGX, UTY-VTGXV											
	Thermostat Converter		● UTY-TTRXZ1											















OPTIONAL PARTS LIST for VC-V

Others

Type			Indoor unit										Indoor unit				Outdoor unit									
			Cassette			Duct			Duct			Ceiling / Floor	Ceiling	Wall Mounted												
			One-way Flow	3D Flow	Compact Grid type / Standard type	Slim type	Large type	Low Static Pressure			Low Static Pressure			Medium Static Pressure	High Static Pressure	—		EEV external		—						
						Circular Flow		Mini (With drain pump)	Mini (Without drain pump)		Slim (With drain pump)			Normal	Normal											
			AUGV 007/012/014/ 018/024 GLEH-U	AUGS 018/024 GLEH-U	AUGB 007/009/012/ 014/018/024 GLEH-U, AUGB 007/009/012/ 014/018/024 GTEH-U	AUCN 009/012/014/ 018/024 GLAH-U, AUGM018GTEH-U	AUGK 018/024/030/ 034/036/045/054 GLEH-U, AUGK 018/024/030/ 034/036/045/054 GTEH-U	ARGK 007/009/012/ 014/018/024 GLGH-U	ARGK 007/009/012/ 014/018/024 GLHH-U		ARGD 007/009/012/ 014/018/024 GLEH-U, ARGD 007/009/012/ 014/018/024 GTEH-U	ARGA 024/030/036/045 GLEH-U, ARGA 024/030/036/045 GTEH-U	ARGC 036/045/060/ 072/090/096 GTEH-U	ABGA 012/014/018/024 GTEH-U	ABGA 030/036/045/054 GTEH-U	ASGA 007/009/012/014 GCGH-U	ASGE 007/009/012/014 GCEH-U	ASGA 18/24GBCH-U	ASGA 030/034GTEH-U							
Others	Human Sensor Kit					● UTY-SHZXC																				
	Remote Sensor Unit	 New amenity space can be offered by installing the Remote sensor.	● UTY-XSZXZ1																	● UTY-XSZXZ1						
	Cassette Grille		● UTG-UNGA-W UTG-UNGB-W	● UTG-USGA-W	● UTG-UFGE-W	● UTG-UKGD-W UTG-UKGC-W UTG-UKGA-B																				
	Auto Louver Grille Kit							● UTD-GXTA-W(007/009/012/014) UTD-GXTB-W(018) UTD-GXTC-W(024)		● UTD-GXTA-W (007/009/012/014) UTD-GXTB-W(018) UTD-GXTC-W(024)																
	Long Life Filter											● UTD-LF25NA	● UTD-LF60KA (036/045/060)													
	Flange											● UTD-SF045T UTD-RF204			● UTD-RF204											
	Drain Pump Unit											● UTZ-PX1NBA			● UTR-DPB24T											
	Wide Panel					● UTG-AKXA-W																				
	Panel Spacer					● UTG-BKXA-W																				
	Fresh air intake kit				● UTZ-VXAA	● UTZ-VXRA																				
	Air Outlet Shutter Plate				● UTR-YDZB	● UTR-YDZK, UTR-YDZC																				
	Insulation for High Humidity				● UTZ-KXGC	● UTZ-KXRA UTZ-KXGB	● UTZ-KXRA UTZ-KXGA																			
	External Power Supply Unit		● UTZ-GXXA UTZ-GXXC																	● UTZ-GXXA UTZ-GXXC		● UTZ-GXXA UTZ-GXXC (036/096)	● UTZ-GXXA UTZ-GXXC			
	Pressure Sensor Kit for V-III Series*																				● UTY-SPWX					

OPTIONAL PARTS LIST for V-III Tropical and J-III Tropical

Others

Type			Indoor unit													Outdoor unit		
			Cassette					Duct						Ceiling / Floor	Ceiling	Wall Mounted		V-III Tropical
			4-way Compact	4-way		Circular Flow		Mini (With drain pump)	Mini (Without drain pump)	Slim (With drain pump)	Medium Static Pressure	High Static Pressure						
			AUGB 07/09/12/14/18/24 GALH, AUGB 07/09/12/14/18/24 GATH	AUGD 18/24GALH	AUGA 18/24/30/ 36/45/54 GALH	AUGM 018/024GTAH	AUGK 018/024/030/034/ 036/045/054 GTAH	ARCK 07/09/12/14/18/24 GCLH	ARCK 07/09/12/14/18/24 GALH	ARGD 07/09/12/14/18/24 GATH	ARGA 24/30/36/45 GBTH	ARCC 36/72/90 GBTH, ARCC 96GATH	ARGC 45/60/72/90 GATH	ABGA 12/14/18/24 GATH	ABGA 30/36/45/54 GATH	ASGA 07/09/12/14 GACH, ASGA 07/09/12/14 GATH	ASGA 18/24/30 GACH, ASGA 18/24/30 GATH	AJ* 072/090/108/ 126/144/162 LN**H
Others	Human Sensor Kit					● UTY-SHZXC												
	Remote Sensor Unit	 New amenity space can be offered by installing the Remote sensor.	● UTY-XSZX					● UTY-XSZX			● UTY-XSZX							
	Cassette Grille	 UTG-UFGC-W    UTG-UGGA-W  UTG-UKGD-W    UTG-UKGA-B	● UTG-UFGC-W	● UTG-UGGA-W		● UTG-UKGD-W UTG-UKGA-B												
	Auto Louver Grille Kit							● UTD-GXTA-W UTD-GXTB-W(18) UTD-GXTC-W(24)		● UTD-GXTA-W UTD-GXTB-W(18) UTD-GXTC-W(24)								
	Long Life Filter											● UTD-LF25NA	● UTD-LF60KA(36/45/60)					
	Flange											● UTD-SF045T UTD-RF204				● UTD-RF204		
	Drain Pump Unit											● UTZ-PX1NBA					● UTR-DPB24T	
	Wide Panel	 Indoor unit 950 Panel 600 (mm)		● UTG-AKXA-W UTG-AGYA-W		● UTG-AKXA-W												
	Panel Spacer	 (mm) 242 Panel spacer		● UTG-BKXA-W UTG-BGYA-W		● UTG-BKXA-W												
	Air Outlet Shutter Plate	 For Compact Cassette  For Cassette	● UTR-YDZB	● UTR-YDZK		● UTR-YDZK												
	Insulation for High Humidity	 For Compact Cassette type / Cassette type	● UTZ-KXGC	● UTZ-KXRA		● UTZ-KXRA												
	Pressure Sensor Kit for V-III Series*																	● UTY-SPWX














AJ\*LN\*\* : AJH(G)\_LNTD, AJG\_LNLC



OPTIONAL PARTS

Controllers

For Individual Control












<div>Wired remote controller (Design type)</div> <div>UTY-RVRG</div> <div></div>	<div>Wired Remote Controller (Touch Panel)</div> <div>UTY-RNRGZ5</div> <div></div>	<div>Wired Remote Controller</div> <div>UTY-RLRG</div> <div></div>
<div>Compact Wired Remote Controller</div> <div>UTY-RCRGZ1</div> <div>UTY-RCRGZ1K</div> <div>NEW UTY-RCRGZ1B</div> <div></div> <div></div> <div></div>		<div>Simple Remote Controller</div> <div>UTY-RSRG</div> <div>With operation mode</div> <div></div>
<div>Simple Remote Controller</div> <div>UTY-RHRG</div> <div>Without operation mode</div> <div></div>	<div>Wireless Remote Controller</div> <div>UTY-LNHGU</div> <div></div>	<div>IR Receiver Unit</div> <div>UTB-YWC</div> <div>For All Duct types except Large Airflow Duct</div> <div></div>
<div>IR Receiver Unit</div> <div>UTY-LRHGB1</div> <div>For Cassette type</div> <div></div>	<div>IR Receiver Unit</div> <div>UTY-LBHXD</div> <div>For Circular Flow Cassette type</div> <div></div>	<div>Human Sensor Kit</div> <div>UTY-SHZXC</div> <div>For Circular Flow Cassette type</div> <div></div>

For Centralized Control

<b>Central Remote Controller</b> UTY-DCGGZ3 	<b>System Controller Lite</b> <span>Software</span> UTY-ALGXZ1 WHITE-USB-KEY (Software Protection Key) <b>Option</b> UTY-PLGXR2 UTY-PLGXA2 UTY-PLGXE2 UTY-PLGXX2 	<b>System Controller</b> <span>Software</span> UTY-APGXZ1 WHITE-USB-KEY (Software Protection Key) <b>Option</b> UTY-PEGXZ1 
---	---	--

Converters / Adaptors





For External device / System expansion

<b>BACnet® Gateway</b> <span>Software</span> UTY-ABGXZ1 WHITE-USB-KEY (Software Protection Key) 	<b>BACnet® Gateway</b> <span>Hardware</span> UTY-VBGX 	<b>MODBUS® Converter</b> <span>Hardware</span> for VRF UTY-VMGX 
<b>MODBUS® Interface</b> FJ-RC-MBS-1 	<b>KNX® Converter</b> <span>Hardware</span> for VRF UTY-VKGX 	<b>KNX® Interface</b> FJ-RC-KNX-1i 
<b>Wireless LAN Interface</b> FJ-RC-WIFI-1 	<b>Network Converter</b> for single split UTY-VTGX DC power supply type 	<b>Network Converter</b> for single split UTY-VTGXV AC power supply type 
<b>Network Converter</b> for Group Remote Controller UTY-VGGXZ1 	<b>External Switch Controller</b> UTY-TERX 	<b>Signal Amplifier</b> UTY-VSGXZ1 
<b>Thermostat Converter</b> UTY-TTRXZ1 	<b>Pressure Sensor Kit</b> for V-III tropical Series* UTY-SPWX 	

OPTIONAL PARTS






Panels

For Cassette type

<b>Cassette Grille</b> UTG-UFGD-W For Compact Cassette type 	<b>Cassette Grille</b> UTG-UGGA-W For Cassette type 	<b>Cassette Grille</b> UTG-UKGD-W For Circular Flow Cassette type 
<b>Cassette Grille</b> UTG-UKGA-B For Circular Flow Cassette type 		

Others

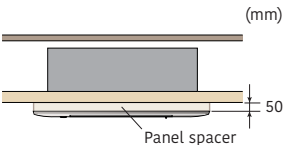For Cassette type








<b>Wide Panel</b> UTG-AKXA-W For Cassette type 	<b>Panel Spacer</b> UTG-BGYA-W For Cassette type 	<b>Insulation Kit</b> for High Humidity UTZ-KXRA For Cassette type UTZ-KXGC For Compact Cassette type 
<b>Air Outlet Shutter Plate</b> UTR-YDZB For Compact Cassette type Shuts the air outlet when only using as 3 blow out. 	<b>Air Outlet Shutter Plate</b> UTR-YDZK For Cassette type Shuts the air outlet when only using as 3 blow out. 	

For Ceiling type














<b>Drain Pump Unit</b> UTR-DPB24T For Ceiling type 		
---	--	--

Others

For Duct type

<b>Flange (Round)</b> UTD-RF204 For Medium Static Pressure Duct type / Ceiling type 	<b>Flange (Square)</b> UTD-SF045T For Medium Static Pressure Duct type 	<b>Remote Sensor Unit</b> UTY-XSZX For All Duct type New amenity space can be offered by installing the Remote sensor. 
<b>Long-Life Filter</b> UTD-LF25NA For Medium Static Pressure Duct type  UTD-LF60KA For High Static Pressure Duct type 	<b>Auto Louver Grille Kit</b> UTD-GXTA-W (for ARGD07/09/12/14, ARGK07/09/12/14) UTD-GXTB-W (for ARGD18, ARGK18) UTD-GXTC-W (for ARGD24, ARGK24) For Slim Duct type / Mini Duct type 	<b>Drain Pump Unit</b> UTZ-PX1NBA For Medium Static Pressure Duct 

Communication system: External Connect Kit

<b>For Indoor unit</b> UTY-XWZXZ7  UTY-XWZXZB  UTY-XWZXZC 	UTY-XWZXZD  UTY-XWZXZE  UTY-XWZXZA 	<b>For Outdoor unit</b> UTY-XWZXZ6  UTY-XWZXZ9  UTY-XWZXZF 
<b>For Central Remote Controller</b> UTY-XWZXZ7  UTY-XWZXZ8  UTY-XWZXZA 	<b>For Touch Panel Controller</b> UTY-XWZXZA 	



FUNCTION LIST for VC-V

Type		Indoor unit									Indoor unit						Outdoor unit			Controller					
		Cassette			Duct			Duct			Ceiling / Floor	Ceiling	Wall Mounted				J-III Tropical	V-III Tropical	VC-V	Central Remote Controller					
		One-way Flow	3D Flow	Compact Grid type / Standard type	Slim type	Large type	Low Static Pressure			Medium Static Pressure			High Static Pressure												
					Circular Flow		Mini (With drain pump)	Mini (Without drain pump)	Slim (With drain pump)	Normal			Normal												
		AUGV 007/012/014/ 018/024 GLEH-U	AUGS 018/024 GLEH-U	AUGB 007/009/012/ 014/018/024 GLEH-U, AUGB 007/009/012/ 014/018/024 GTEH-U	AUGN 009/012/014/ 018/024 GLAH-U, AUGM018GTEH-U	AUGK 018/024/030/ 034/036/045/054 GLEH-U, AUGK 018/024/030/ 034/036/045/054 GTEH-U	ARGK 007/009/012/ 014/018/024 GLGH-U	ARGK 007/009/012/ 014/018/024 GLHH-U	ARGD 007/009/012/ 014/018/024 GLEH-U, ARGD 007/009/012/ 014/018/024 GTEH-U	ARGA 024/030/036/045 GLEH-U, ARGA 024/030/036/045 GTEH-U	ARGC 036/045/060/ 072/090/096 GTEH-U	ABGA 012/014/018/024 GTEH-U	ABGA 030/036/045/054 GTEH-U	ASGA 007/009/012/014 GCGH-U	ASGE 007/009/012/014 GCEH-U	ASGA 18/24GBCH-U	ASGA 030/034GTEH-U	AJH 040/045/054 LBTBHN, AJH 040/045/054 LETBHN	AJ* 072/090/108/ 126/144/162 LN* *H	AJG 072/090/108/126/ 144/162/180 JNTAH-U	UTY-DCGGZ3				
Input	Operation / Stop	●UTY-XWZXZD ○UTY-XWZXZB																							
	All On / All Off																				●UTY-XWZXZ7 ○UTY-XWZXZ8				
	Group Stop																	●UTY-XWZXZ6							
	Forced Stop	●UTY-XWZXZD ○UTY-XWZXZB																●UTY-XWZXZD ○UTY-XWZXZB							
	Emergency Stop	●UTY-XWZXZD ○UTY-XWZXZB																●UTY-XWZXZD ○UTY-XWZXZB					●UTY-XWZXZ6		●UTY-XWZXZ7 ○UTY-XWZXZ8
	Forced Thermostat off	●UTY-XWZXZE ○UTY-XWZXZ7																●UTY-XWZXZE ○UTY-XWZXZ7							
	Low Noise Mode Operation																		●UTY-XWZXZ6						
	Cooling/ Heating Priority																								
	Outdoor Unit Operation Peak Control																		●UTY-XWZXZ6						
Power Usage Information from Electricity Meter																		●UTY-XWZXZF							
Output	Operation Status	●UTY-XWZXZC																●UTY-XWZXZC					○UTY-XWZXZ6		○UTY-XWZXZA
	Error Status	●UTY-XWZXZC																●UTY-XWZXZC					○UTY-XWZXZ6		○UTY-XWZXZA
	Indoor Unit Fun Operation Status	●UTY-XWZXZC																●UTY-XWZXZC							
	Auxiliary Heater Output						●UTY-XWZXZC				●UTY-XWZXZC														
	Base Heater																		●UTY-XWZXZ9						

AJ\*\_\_\_LN\*\* : AJH(G)\_\_LNTD, AJG\_\_LNLCL●: Dry Contact ○: Apply Voltage

FUNCTION LIST for V-III Tropical and J-III Tropical

Type		Indoor unit										Indoor unit				Outdoor unit		Controller	
		Cassette					Duct					Ceiling / Floor	Ceiling	Wall Mounted		J-III Tropical	V-III Tropical	Central Remote Controller	
		4-way Compact	4-way		Circular Flow		Mini (With drain pump)	Mini (Without drain pump)	Slim (With drain pump)	Medium Static Pressure	High Static Pressure								
		AUGB 07/09/12/14/18/24 GALH, AUGB 07/09/12/14/18/24 GATH	AUGD 18/24GALH	AUGA 18/24/30/ 36/45/54 GALH	AUGM 018/024GTAH	AUGK 018/024/030/034/ 036/045/054 GTAH	ARGK 07/09/12/14/18/24 GCLH	ARGK 07/09/12/14/18/24 GALH	ARCD 07/09/12/14/18/24 GATH	ARGA 24/30/36/45 GBTH	ARCC 36/72/90 GBTH, ARCC 96GATH	ARCC 45/60/72/90 GATH	ABGA 12/14/18/24 GATH	ABGA 30/36/45/54 GATH	ASGA 07/09/12/14 GACH, ASGA 07/09/12/14 GATH	ASGA 18/24/30 GACH, ASGA 18/24/30 GATH	AJH 040/045/054 LBTBHN, AJH 040/045/054 LETBHN	AJ* 072/090/108/ 126/144/162 LN**H	UTY-DCGGZ3
Input	Operation / Stop	●UTY-XWZXZD ○UTY-XWZXZB										●UTY-XWZXZD ○UTY-XWZXZB							
	All On / All Off																	●UTY-XWZXZ7 ○UTY-XWZXZ8	
	Group Stop																●UTY-XWZXZ6		
	Forced Stop	●UTY-XWZXZD ○UTY-XWZXZB										●UTY-XWZXZD ○UTY-XWZXZB							
	Emergency Stop	●UTY-XWZXZD ○UTY-XWZXZB										●UTY-XWZXZD ○UTY-XWZXZB						●UTY-XWZXZ6	●UTY-XWZXZ7 ○UTY-XWZXZ8
	Forced Thermostat off	●UTY-XWZXZE ○UTY-XWZXZ7										●UTY-XWZXZE ○UTY-XWZXZ7							
	Low Noise Mode Operation																●UTY-XWZXZ6		
	Cooling/ Heating Priority																		
	Outdoor Unit Operation Peak Control																●UTY-XWZXZ6		
	Power Usage Information from Electricity Meter																	●UTY-XWZXZF	
Output	Operation Status	●UTY-XWZXZC										●UTY-XWZXZC						○UTY-XWZXZ6	○UTY-XWZXZA
	Error Status	●UTY-XWZXZC										●UTY-XWZXZC						○UTY-XWZXZ6	○UTY-XWZXZA
	Indoor Unit Fun Operation Status	●UTY-XWZXZC										●UTY-XWZXZC							
	Auxiliary Heater Output						●UTY-XWZXZC					●UTY-XWZXZC							
	Base Heater																●UTY-XWZXZ9		

AJ\*\_\_\_LN\*\* : AJH(G)\_\_\_LNTD, AJG\_\_\_LNL C    ● : Dry Contact    ○ : Apply Voltage



# SEPARATION TUBE etc.

Connection Units

Separation Tube

UTP-AX054A	UTP-AX090A	UTP-AX180A
Gas Pipe	Gas Pipe	Gas Pipe
Liquid Pipe	Liquid Pipe	Liquid Pipe
UTP-AX567A	UTP-LX180A for DX Kit	<b>NEW</b> UTP-AX792B *VC-V only
Gas Pipe		Gas Pipe
Liquid Pipe		Liquid Pipe

Header

UTR-H0906L / UTR-H1806L	UTR-H0908L / UTR-H1808L	
Gas Pipe	Gas Pipe	
Liquid Pipe	Liquid Pipe	

Outdoor Unit Branch Kit

UTP-CX567A	<b>NEW</b> UTP-AX792B *VC-V only	
Gas Pipe	Gas Pipe	
Liquid Pipe	Liquid Pipe	

EV Kit

Model code ≤ 09 : UTR-EV09XB Model code ≥ 12 : UTR-EV14XB For Compact Wall Mounted type		
		

Specifications

Separation Tube

Model name		UTP-AX054A	UTP-AX090A	UTP-AX180A	UTP-AX567A
Total cooling capacity of indoor unit	kW	19.6 or less	28.0 or less	28.1 to 56.0	56.1 or more
Model name		UTP-BX090A	UTP-BX180A	UTP-BX567A	UTP-AX792B
Total cooling capacity of indoor unit	kW	28.0 or less	28.1 to 56.0	56.1 or more	218.4 or more*

\*The value will change depending on the installation conditions. For details, please check the Design & Technical Manual.

Header

Model name	3-6 Branches	UTR-H0906L	UTR-H1806L
	3-8 Branches	UTR-H0908L	UTR-H1808L
Total cooling capacity of indoor unit	kW	28.0 or less	28.1 to 56.0
Model name	3-6 Branches	UTP-J0906A	UTP-J1806A
	3-8 Branches	UTP-J0908A	UTP-J1808A
Total cooling capacity of indoor unit	kW	28.0 or less	28.1 to 56.0

Outdoor unit Branch kit

Model name		UTP-CX567A (for V-III Tropical)	UTP-AX792B (for VC-V)
Model name	2 outdoor units	1	1
	3 outdoor units	2	2

EV Kit

Model name	UTR-EV09XB	UTR-EV14XB
Application Model	ASHE007GTAH ASHE009GTAH	ASHE012GCAH ASHE014GCAH

Reducer kit

Model name	UTP-NX18A	UTP-NX54A
Applicable Model	AUXK018GTAH AUXM018GTAH AUGK018GTAH AUGM018GTAH	AUXK036/045/054GTAH AUXM036/045/054GTAH

# SUPPORT

Our know-how supports you not only during the product release but also from guiding implementation to product maintenance.

- Support
- HVAC system design support tool
- Quick service & maintenance
- Service tool
- Web monitoring tool

Category	Information Material												Tool			
	Product Sales Training Material	Product Technical Training Material	Product news	Brochures	Feature Promotion Movie	Operating Manual	Design & Technical Manual	Certificate Data	2D CAD Data	3D CAD (Revit) Data	Installation Manual	Service Manual	Design Simulator (Room air conditioner, Packaged air conditioner, VRF)	CFD Simulation	Service Tool / Web Monitoring Tool	Mobile Technician
Product Training	●	●														
Product Information Seek			●	●	●	●	●									
Technical Information Seek							●	●								
Model Selection							●						●			
Design							●		●	●			●			
Verification														●		
Installation							●				●					
After sales and Service												●			●	●





# Support


Fujitsu General provides a variety of product and technical information to engineers and consultants, and also conducts new product research and design support activities. We provide a wide range of support to maintain high quality from design to installation.

## Technical information

We provide equipment selection software that facilitates the design of air conditioning systems by providing performance data for the units and estimation for model selection.

**Features**

- Design & Technical manuals
- Model selection & estimation
- Certification data
- 2D/3D CAD data




2D/3D CAD data

## Product information

Information on new models is provided in the form of documents and movies in a timely manner for release, readily downloadable from the private section of our website. Contact your Fujitsu General representative for access information.

**Features**

- Product news
- Brochures & manuals
- Promotional movies

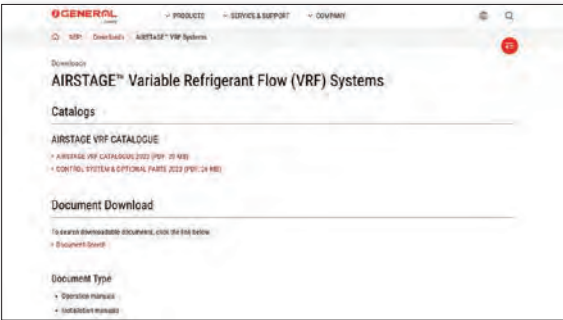

<https://www.fujitsu-general.com/g-eu/support/downloads/vrf/>




# Training facilities

## Technical support

Technical support is offered at every stage, from design through to installation, to assist in optimizing air conditioning solutions.

**Features**

- CFD simulation
- Guidelines
- Commissioning support

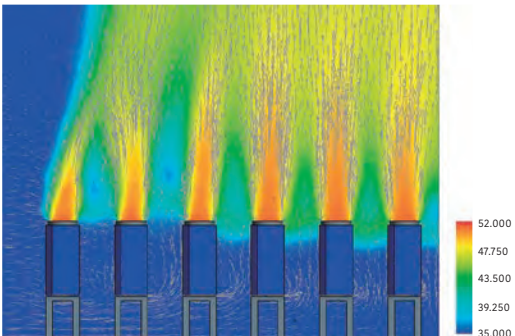

CFD simulation



Commissioning support



Fujitsu General regularly provides professional product, technical and service training at its training facilities worldwide. These research facilities also support the development of human resources with advanced technical skills.

**Features**

- Designing VRF systems
- On-site training for control systems

- 1 Head office training center in Japan
- 2 Training center in China
- 3 Asia training center in Singapore
- 4 Europe training center in the United Kingdom
- 5 Europe training center in Germany
- 6 America training center in the United States
- 7 Middle East training center in the UAE
- 8 Oceania training center in Australia




# HVAC system design support tool

Put the charts and pens away and design your projects on your computer with ease using the Design Simulator. Everything from selecting indoor and outdoor units, allocating controls and optional parts to designing the piping and wiring systems is made easier using the program's built-in features. Once your project is designed take advantage of the Export functions to easily get materials lists, product specifications, refrigerant calculations and more - it'll even export to Word, Excel, or Acrobat formats, and group the relevant CAD data for your project.



## Design simulator

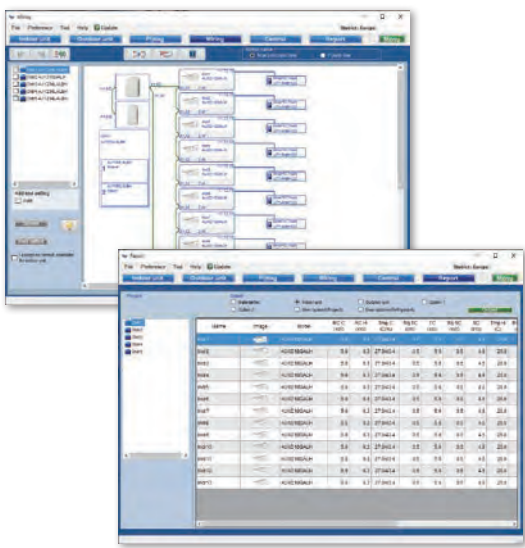

### Automatically create model selection information


- The required performance, type, and temperature conditions for each indoor unit are entered and then dragged and dropped onto the outdoor unit to automatically set each unit.
- Creates piping and wiring diagrams automatically to facilitate branching, grouping, and option settings.
- The additional refrigerant charging is automatically calculated when the pipe length is entered.
- Easy configuration of remote controller groups, central controller, and converters.
- The equipment list including the equipment information is created automatically.



### Outputs in the format that matches the application

You can export your project information in a number of industry standard file formats.

- Word format (rtf) (doc)
- Excel format (csv)
- Acrobat format (pdf)
- 2D CAD data (DXF)

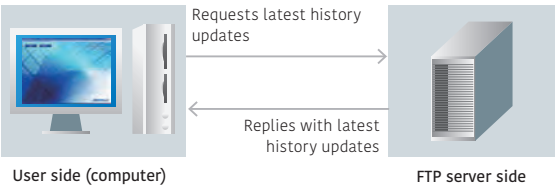

### Update your Design simulator

The database can be updated easily online with the AutoUpdate function using FTP.

# BIM

Building information modeling

## BIM files of Fujitsu General's products are available on BIMobject®


Fujitsu General is releasing BIM files of our products on the BIMobject® website BIMobject.com.

### Outline of BIMobject®

BIMobject® is a game changer for the construction industry, offering development, maintenance, and syndication of objects on the world's largest BIM platform.

### About BIM files

- BIM files can be viewed in Autodesk Revit® 2018 version or later.
- In each BIM file, the location of the connectors for the refrigerant and drain pipe is different.
- Each BIM file includes several family types.
- A catalog and specification sheet is available in Revit file format for each product.

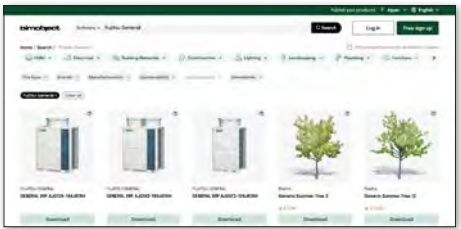

### RFA (Revit data)

A data format available for BIM-designed projects

#### Data content

- Shape (Size)
- Drain direction
- Pipe direction
- Power supply location
- It contains information about the above specifications.



Type catalog with product specifications



### DWG

a standard data format used for Autodesk products



### DXF

Intermediate data commonly available in CAD products

#### Data content

- Shape (Size)



\*To learn more about how to use BIM files, refer to the instructional video on each product page. [youtu.be/wfL-hwFQ7dM](https://youtu.be/wfL-hwFQ7dM)



# Quick service & maintenance

If trouble should occur in a unit or system, abundant support tools such as trouble code display at the product, Service Tool that allows checking of the detailed status of the entire system, and remote monitoring tool that uses the internet, etc. support quick service and maintenance anywhere and at any time.




## Easy maintenance & monitoring

### Designed for easy maintenance

The operating status of the air conditioner and detailed trouble conditions are displayed on the 7-segment indicator lamp on the outdoor unit printed circuit board (PCB) and on the screen of the remote controller.

Check the status of the unit quickly for a prompt response.


- Display the operation mode at the time.
- Discharge temperature and pressure
- Compressor operation status
- "Address/Type/Number" of the outdoor unit
- Error code

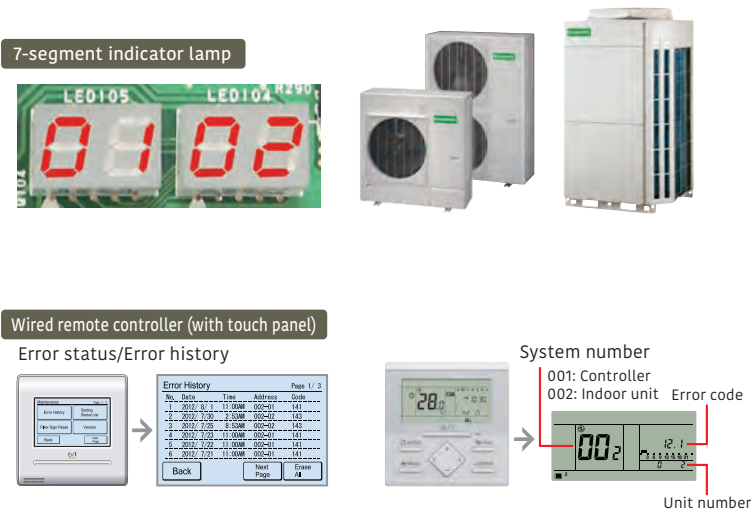

### Error diagnosis by Service tool


Connect Service tool to check the status details of units, from single split to VRF, on a computer screen. Check the errors quickly for prompt countermeasures.

- Operating status/control
- Monitoring operating conditions
- Monitoring sensor data
- Indicating trend graphs
- Error history
- Indicating refrigerant circuit diagrams (for VRF)

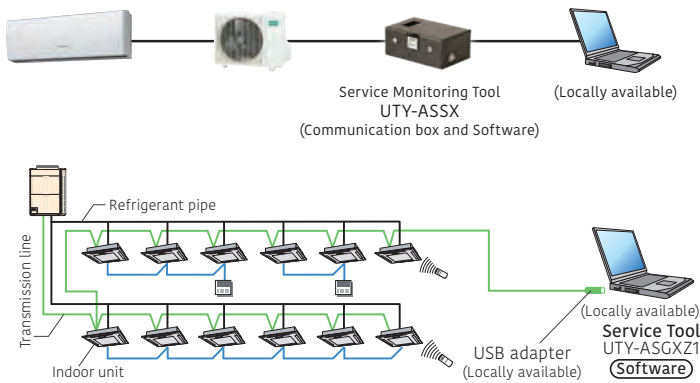

### Remote monitoring

VRF system operating status and trouble status details can be monitored remotely at any time via the internet. Prompt coordination is available with service personnel.

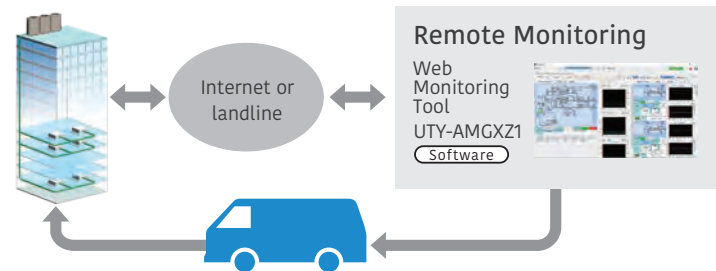

## Mobile troubleshooting App for iOS and Android™ devices

We will release an App for troubleshooting tools for iPhone, iPod touch and other Apple devices, and Android products for Fujitsu General air conditioners (Room air conditioner/Packaged air conditioners VRF and ATW, "AIRSTAGE Mobile", and R32 calculation of allowable refrigerant capacity)

Use Error Code Check, Troubleshooting, and Sensor Check to understand the status of your air conditioner.



# Service tool

UTY-ASGXZ1

## Extensive monitoring and analysis functions that make installation and maintenance easier



- The operation status of the system can be monitored and analyzed to detect any malfunctions.
- Data on the operation status of the system can be stored on a computer to allow for remote access.
- Up to 400 indoor units in a single VRF network system can be controlled and monitored for a large building or hotel.
- This software can be connected to any point of transmission line with a USB adapter (locally available).

\* Saved data can be displayed offline. Note that the data saved by the following software applications cannot be displayed.

- UTR-YSTB/UTR-YSTC (Service tool)
- UTR-YMSA (Web monitoring tool)

## Automatic operation check for refrigeration cycles

Once installed, the Service tool automatically checks for refrigeration cycles. The self-diagnosis function determines whether each sensor value is normal, which reduces the need for manual checks. The result of a diagnosis can be provided in a report.

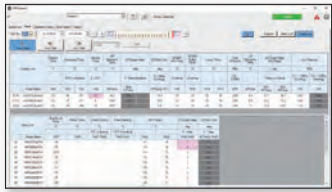


Use the result of a self-diagnosis only as a guide and use your own judgment to make a final decision.

**These sensor values are checked automatically:**


- ✔ the discharge temperature is normal, “OK”
- ✔ the super heat volume is normal, “OK”
- ✔ the high pressure pipe value is normal, “OK”
- ✔ the low pressure pipe value is normal, “OK”

And the values for other items will also be diagnosed.



## Remote technical support and maintenance

On-site check screen can be shared between on-site staff and a service technician in a remote location. When a service technician visits the site for troubleshooting, the system’s operation status can be shared in real time with a remote service center for assistance. On-site staff can have an online chat with a remote service center to get further assistance.

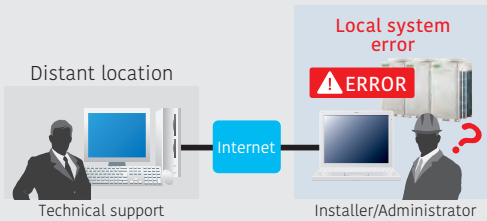

## Trend charts

Previous-generation application could display only 3 sets of data from sensors. However, the current generation of the service tool displays multiple charts simultaneously so that refrigeration cycles can be monitored and checked in greater detail.



### Computer requirements

UTY-ASGXZ1	
Operating system	• Microsoft Windows 10 Pro (64-bit) • Microsoft Windows 11 Pro (64-bit)
CPU	Intel® Core™ processor 1 GHz or higher
Memory	4 GB or more
HDD	40 GB or more of free space
Screen resolution	1,366 × 768 or higher resolution
Interface	• 2 USB ports – 1 USB port is required for WHITE-USB-KEY connection – 1 USB port is required for Echelon U10 USB/U60-FT DIN Network Interface
Software	Adobe Reader 9.0 or later
Internet transmission rate (in remote access)	Internet environment capable for communication speed of 3 Mbps or more (for uploading) all the time (including when accessing to overseas website)

- Transmission adapter (Required for each VRF network):
  - Echelon U10 USB Network Interface – TP/FT-10 Channel (Model number: 75010R)
  - Echelon U60-FT DIN Network Interface (Model number: 75060R-40)

### Packing list

Name	Quantity	UTY-ASGXZ1
White-USB-key (Software protection key)	1	Software protection key to be connected to a USB port on a Service tool-installed computer. This software runs only on a computer with WibuKey.

- Computer requirements
- Echelon® U10 USB Network Interface – TP/FT-10 Channel (Model number: 75010R) (Required for each VRF Network)


# Web monitoring tool

UTY-AMGXZ1

## Features


- Troubleshooting is performed by monitoring each air conditioning unit remotely during a periodical system check.
  - An error notification is automatically transmitted to several locations via the internet\*1.
  - Requires either a dedicated internet connection or landline to operate.
  - The occurrence of an error can be confirmed through an error alert and equipment status information obtained from a remote location.
  - Monitoring data can be downloaded in a remote location. These data can be accessed and displayed even when the service tool is in offline mode.
  - Can be viewed on the monitoring computer's Web browser without installing any special software.
- \*1: Internet e-mail access required.

## Web Monitoring System

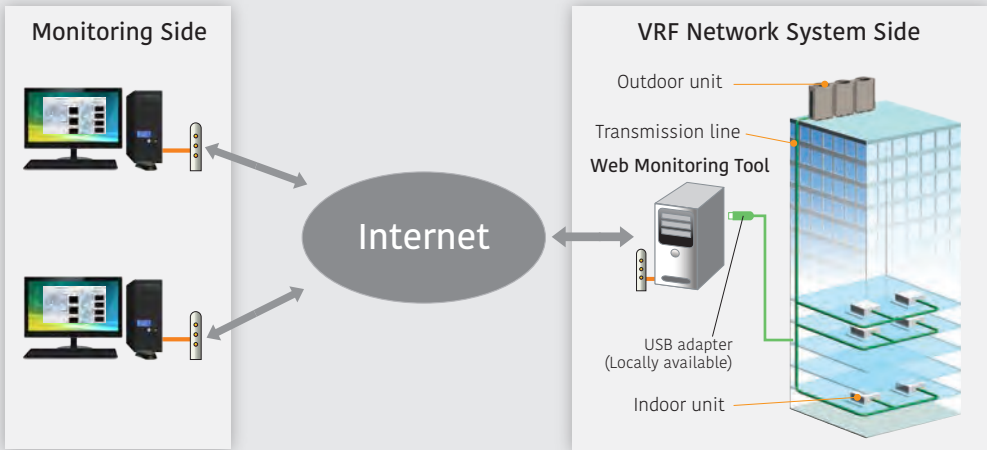

## Supporting up to 4 VRF network systems

Up to 4 USB adapters can be connected to a computer, enabling the monitoring of up to 1,600 indoor units. Suitable for use in a large building or hotel.

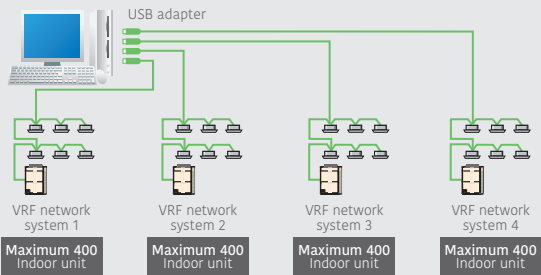

### Computer requirements

UTY-AMGXZ1	
Operating system	• Microsoft Windows 10 Pro (64-bit) • Microsoft Windows 11 Pro (64-bit)
CPU	Intel® Core™ processor 1 GHz or higher
Memory	4 GB or more
HDD	40 GB or more of free space
Screen resolution	1,366 × 768 or higher resolution
Interface	• USB port (for Echelon U10 USB/U60-FT DIN Network Interface, Max. 4, software protection key) • Either of the following interface is required for remote connection: <ul style="list-style-type: none"><li>– Internet using LAN: Ethernet port is required.</li></ul>
Software	Adobe Reader 9.0 or later
Internet transmission rate (in remote access)	Internet environment capable for communication speed of 3 Mbps or more (for uploading) all the time (including when accessing to overseas website)

- Transmission adapter (Required for each VRF network):
  - Echelon U10 USB Network Interface – TP/FT-10 Channel (Model number: 75010R)
  - Echelon U60-FT DIN Network Interface (Model number: 75060R-40)

### Packing list

Name	Quantity	UTY-ASGXZ1
White-USB-key (Software protection key)	1	Software protection key to be connected to a USB port on a Service tool-installed computer. This software runs only on a computer with WibuKey.

- Computer requirements
- Echelon® U10 USB Network Interface – TP/FT-10 Channel (Model number: 75010R) (Required for each VRF Network)